

Introduction to Transverse Beam Dynamics

Bernhard Holzer,
CERN-LHC

The Ideal World


I.) Magnetic Fields and Particle Trajectories



Luminosity Run of a typical storage ring:

LHC Storage Ring: Protons accelerated and stored for 12 hours
distance of particles travelling at about $v \approx c$
 $L = 10^{10}$ - 10^{11} km
... several times Sun - Pluto and back

intensity (10^{11})

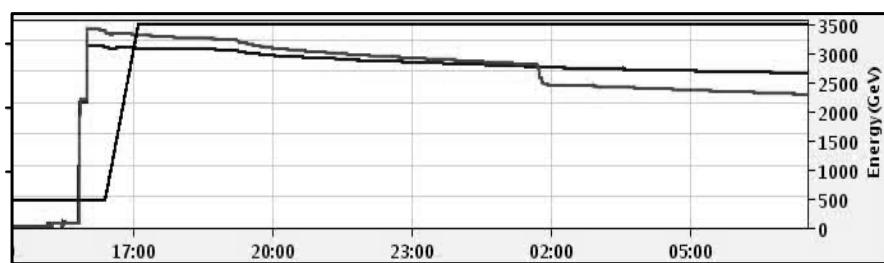

- guide the particles on a well defined orbit („design orbit“)
- focus the particles to keep each single particle trajectory within the vacuum chamber of the storage ring, i.e. close to the design orbit.

Transverse Beam Dynamics:

0.) Introduction and Basic Ideas

„ ... in the end and after all it should be a kind of circular machine“
 → need transverse deflecting force

Lorentz force

$$\vec{F} = q (\vec{E} + \vec{v} \times \vec{B})$$

typical velocity in high energy machines:


$$v \approx c \approx 3 * 10^8 \frac{\text{m}}{\text{s}}$$

old greek dictum of wisdom:

if you are clever, you use magnetic fields in an accelerator wherever it is possible.

But remember: magn. fields act always perpendicular to the velocity of the particle
 → only bending forces, → no „beam acceleration“

The ideal circular orbit

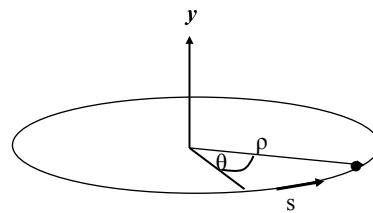

circular coordinate system

condition for circular orbit:


<i>Lorentz force</i>	$F_L = e v B$	}
<i>centrifugal force</i>	$F_{centr} = \frac{\gamma m_0 v^2}{\rho}$	
$\frac{\gamma m_0 v}{\rho} = e B$	$\frac{p}{e} = B \rho$ $B \rho = "beam rigidity"$	

1.) The Magnetic Guide Field

Dipole Magnets:


define the ideal orbit
homogeneous field created
by two flat pole shoes

$$B = \frac{\mu_0 n I}{h}$$



convenient units:

$$B = [T] = \left[\frac{Vs}{m^2} \right] \quad p = \left[\frac{GeV}{c} \right]$$

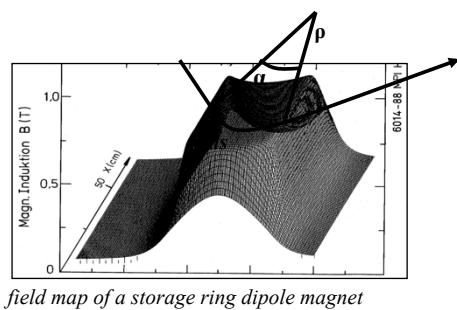

Example LHC:

$$\left. \begin{aligned} B &= 8.3 T \\ p &= 7000 \frac{GeV}{c} \end{aligned} \right\}$$

Normalise magnetic field to momentum:

$$\frac{p}{e} = B \rho \quad \longrightarrow \quad \frac{1}{\rho} = \frac{e B}{p}$$

The Magnetic Guide Field



$$\frac{1}{\rho} = e \frac{8.3 Vs/m^2}{7000 * 10^9 eV/c} = \frac{8.3 s 3 * 10^8 m/s}{7000 * 10^9 m^2}$$

$$\frac{1}{\rho} = 0.3 \frac{8.3}{7000} 1/m$$

$$\rho = 2.53 \text{ km} \quad \longrightarrow \quad 2\pi\rho = 17.6 \text{ km} \quad \approx 66\%$$

$$B \approx 1 \dots 8 \text{ T}$$

rule of thumb:

$$\frac{1}{\rho} \approx 0.3 \frac{B[T]}{p[GeV/c]}$$

„normalised bending strength“

2.) Quadrupole Magnets:

required: focusing forces to keep trajectories in vicinity of the ideal orbit

linear increasing Lorentz force

linear increasing magnetic field

$$B_y = g \cdot x \quad B_x = g \cdot y$$

normalised quadrupole field:

$$\text{gradient of a quadrupole magnet: } g = \frac{2\mu_0 n I}{r^2}$$

$$\longrightarrow \quad k = \frac{g}{p/e}$$



simple rule:

$$k = 0.3 \frac{g(T/m)}{p(GeV/c)}$$

LHC main quadrupole magnet

$$g \approx 25 \dots 220 \text{ T/m}$$

*what about the vertical plane:
... Maxwell*

$$\vec{\nabla} \times \vec{B} = \cancel{\vec{\nabla}} + \cancel{\frac{\partial \vec{E}}{\partial t}} = 0 \quad \Rightarrow \quad \frac{\partial B_y}{\partial x} = \frac{\partial B_x}{\partial y}$$

3.) The equation of motion:

Linear approximation:

* *ideal particle* \rightarrow *design orbit*

* *any other particle* \rightarrow *coordinates x, y small quantities*
 $x, y \ll \rho$

\rightarrow *magnetic guide field: only linear terms in x & y of B have to be taken into account*

Taylor Expansion of the B field:

$$B_y(x) = B_{y0} + \frac{dB_y}{dx} x + \frac{1}{2!} \frac{d^2 B_y}{dx^2} x^2 + \frac{1}{3!} \frac{d^3 B_y}{dx^3} x^3 + \dots \quad \left| \begin{array}{l} \text{normalise to momentum} \\ p/e = B\rho \end{array} \right.$$

$$\frac{B(x)}{p/e} = \frac{B_0}{B_0 \rho} + \frac{g^* x}{p/e} + \frac{1}{2!} \frac{eg'}{p/e} + \frac{1}{3!} \frac{eg''}{p/e} + \dots$$

The Equation of Motion:

$$\frac{\mathbf{B}(x)}{p/e} = \frac{1}{\rho} + k x + \frac{1}{2!} \cancel{m} x^2 + \frac{1}{3!} \cancel{n} x^3 + \dots$$

only terms linear in x, y taken into account *dipole fields*
quadrupole fields



Separate Function Machines:

Split the magnets and optimise them according to their job:


bending, focusing etc

Example:
heavy ion storage ring TSR

*
*man sieht nur
dipole und quads → linear*

Equation of Motion:

*Consider local segment of a particle trajectory
... and remember the old days:
(Goldstein page 27)*

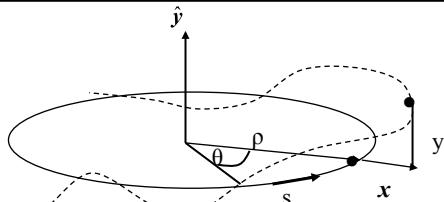

radial acceleration:

$$a_r = \frac{d^2\rho}{dt^2} - \rho \left(\frac{d\theta}{dt} \right)^2$$

$$\text{Ideal orbit: } \rho = \text{const}, \quad \frac{d\rho}{dt} = 0$$

$$Force: \quad F = m\rho \left(\frac{d\theta}{dt} \right)^2 = m\rho\omega^2$$


$$F = mv^2 / \rho$$

general trajectory: $\rho \rightarrow \rho + x$

$$F = m \frac{d^2}{dt^2} (x + \rho) - \frac{mv^2}{x + \rho} = e B_y v$$

$$F = m \frac{d^2}{dt^2} (x + \rho) - \frac{mv^2}{x + \rho} = e B_y v$$

(1) (2)



$$(1) \quad \frac{d^2}{dt^2} (x + \rho) = \frac{d^2}{dt^2} x \quad \dots \text{as } \rho = \text{const}$$

(2) remember: $x \approx mm, \rho \approx m \dots \rightarrow \text{develop for small } x$

$$\frac{1}{x + \rho} \approx \frac{1}{\rho} \left(1 - \frac{x}{\rho}\right)$$

Taylor Expansion

$$f(x) = f(x_0) + \frac{(x - x_0)}{1!} f'(x_0) + \frac{(x - x_0)^2}{2!} f''(x_0) +$$

$$m \frac{d^2 x}{dt^2} - \frac{mv^2}{\rho} \left(1 - \frac{x}{\rho}\right) = e B_y v$$

guide field in linear approx.

$$B_y = B_0 + x \frac{\partial B_y}{\partial x}$$

$$m \frac{d^2 x}{dt^2} - \frac{mv^2}{\rho} \left(1 - \frac{x}{\rho}\right) = ev \left\{ B_0 + x \frac{\partial B_y}{\partial x} \right\}$$

: m

$$\frac{d^2 x}{dt^2} - \frac{v^2}{\rho} \left(1 - \frac{x}{\rho}\right) = \frac{e v B_0}{m} + \frac{e v x g}{m}$$

independent variable: $t \rightarrow s$

$$\frac{dx}{dt} = \frac{dx}{ds} \frac{ds}{dt}$$

$$\frac{d^2 x}{dt^2} = \frac{d}{dt} \left(\frac{dx}{ds} \frac{ds}{dt} \right) = \frac{d}{ds} \underbrace{\left(\frac{dx}{ds} \frac{ds}{dt} \right)}_{x'} \frac{ds}{dt}$$

$$\frac{d^2 x}{dt^2} = x'' v^2 + \cancel{\frac{dx}{ds} \frac{dv}{ds}} \cancel{v}$$

$$x'' v^2 - \frac{v^2}{\rho} \left(1 - \frac{x}{\rho}\right) = \frac{e v B_0}{m} + \frac{e v x g}{m}$$

: v^2

$$x'' - \frac{1}{\rho} (1 - \frac{x}{\rho}) = \frac{e B_0}{mv} + \frac{e x g}{mv}$$

$$m v = p$$

$$x'' - \frac{1}{\rho} + \frac{x}{\rho^2} = \frac{B_0}{p/e} + \frac{x g}{p/e}$$

normalize to momentum of particle

$$\frac{B_0}{p/e} = -\frac{1}{\rho}$$

$$\frac{g}{p/e} = k$$


$$x'' + x \left(\frac{1}{\rho^2} - k \right) = 0$$

* Equation for the vertical motion:

$$\frac{1}{\rho^2} = 0 \quad \text{no dipoles ... in general ...}$$

$k \leftrightarrow -k$ quadrupole field changes sign

$$y'' + k y = 0$$



Remarks:

$$* \quad x'' + \left(\frac{1}{\rho^2} - k \right) \cdot x = 0$$


... there seems to be a focusing even without a quadrupole gradient

„weak focusing of dipole magnets“

$$k = 0 \quad \Rightarrow \quad x'' = -\frac{1}{\rho^2} x$$

even without quadrupoles there is a retriving force (i.e. focusing) in the bending plane of the dipole magnets

... in large machines it is weak. (!)



Mass spectrometer: particles are separated according to their energy and focused due to the $1/\rho$ effect of the dipole


* Hard Edge Model:

$$x'' + \left\{ \frac{1}{\rho^2} - k \right\} x = 0 \quad \dots \text{this equation is not correct !!!}$$

$$x''(s) + \left\{ \frac{1}{\rho^2(s)} - k(s) \right\} x(s) = 0$$

bending and focusing fields ... are functions of the independent variable „s“


!

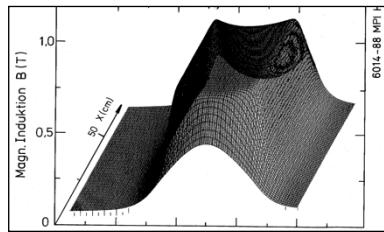

Inside a magnet we assume constant focusing properties !

$$\frac{1}{\rho} = \text{const} \quad k = \text{const}$$

$$B l_{eff} = \int_0^{l_{mag}} B ds$$

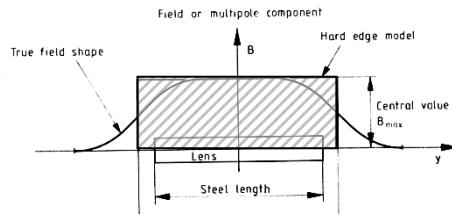

4.) Solution of Trajectory Equations

$$\left. \begin{array}{l} \text{Define ... hor. plane: } K = 1/\rho^2 - k \\ \text{... vert. Plane: } K = k \end{array} \right\} \quad x'' + K x = 0$$

Differential Equation of harmonic oscillator ... with spring constant K

$$\text{Ansatz: } x(s) = a_1 \cdot \cos(\omega s) + a_2 \cdot \sin(\omega s)$$

general solution: linear combination of two independent solutions

$$x'(s) = -a_1 \omega \sin(\omega s) + a_2 \omega \cos(\omega s)$$

$$x''(s) = -a_1 \omega^2 \cos(\omega s) - a_2 \omega^2 \sin(\omega s) = -\omega^2 x(s) \quad \longrightarrow \quad \omega = \sqrt{K}$$

general solution:

$$x(s) = a_1 \cos(\sqrt{K}s) + a_2 \sin(\sqrt{K}s)$$

determine a_1, a_2 by boundary conditions:


$$s = 0 \quad \longrightarrow \quad \begin{cases} x(0) = x_0 & , \quad a_1 = x_0 \\ x'(0) = x'_0 & , \quad a_2 = \frac{x'_0}{\sqrt{|K|}} \end{cases}$$

Hor. Focusing Quadrupole $K > 0$:

$$\begin{aligned} x(s) &= x_0 \cdot \cos(\sqrt{|K|}s) + x'_0 \cdot \frac{1}{\sqrt{|K|}} \sin(\sqrt{|K|}s) \\ x'(s) &= -x_0 \cdot \sqrt{|K|} \cdot \sin(\sqrt{|K|}s) + x'_0 \cdot \cos(\sqrt{|K|}s) \end{aligned}$$

For convenience expressed in matrix formalism:


$$\begin{pmatrix} x \\ x' \end{pmatrix}_{s1} = M_{foc} * \begin{pmatrix} x \\ x' \end{pmatrix}_{s0}$$

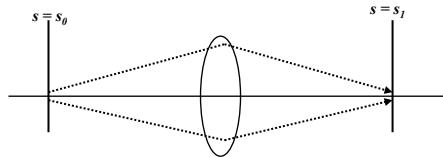

$$M_{foc} = \begin{pmatrix} \cos(\sqrt{|K|}s) & \frac{1}{\sqrt{|K|}} \sin(\sqrt{|K|}s) \\ -\sqrt{|K|} \sin(\sqrt{|K|}s) & \cos(\sqrt{|K|}s) \end{pmatrix}_0$$

hor. defocusing quadrupole:

$$x'' - K x = 0$$

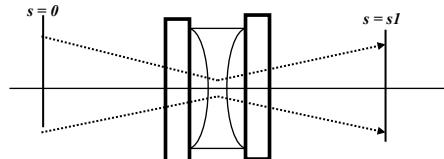

Remember from school:

$$f(s) = \cosh(s) \quad , \quad f'(s) = \sinh(s)$$

$$\text{Ansatz: } x(s) = a_1 \cdot \cosh(\omega s) + a_2 \cdot \sinh(\omega s)$$

$$M_{defoc} = \begin{pmatrix} \cosh \sqrt{|K|}l & \frac{1}{\sqrt{|K|}} \sinh \sqrt{|K|}l \\ \sqrt{|K|} \sinh \sqrt{|K|}l & \cosh \sqrt{|K|}l \end{pmatrix}$$

drift space:

$$K = 0$$

$$M_{drift} = \begin{pmatrix} 1 & l \\ 0 & 1 \end{pmatrix}$$

! with the assumptions made, the motion in the horizontal and vertical planes are independent „... the particle motion in x & y is uncoupled“

Thin Lens Approximation:

matrix of a quadrupole lens

$$M = \begin{pmatrix} \cos \sqrt{|k|}l & \frac{1}{\sqrt{|k|}} \sin \sqrt{|k|}l \\ -\sqrt{|k|} \sin \sqrt{|k|}l & \cos \sqrt{|k|}l \end{pmatrix}$$

in many practical cases we have the situation:

$$f = \frac{1}{kl_q} \gg l_q \quad \dots \text{focal length of the lens is much bigger than the length of the magnet}$$

times: $l_q \rightarrow 0$ while keeping $k l_q = \text{const}$

$$M_x = \begin{pmatrix} 1 & 0 \\ \frac{1}{f} & 1 \end{pmatrix}$$

$$M_z = \begin{pmatrix} 1 & 0 \\ -\frac{1}{f} & 1 \end{pmatrix}$$



... useful for fast (and in large machines still quite accurate) „back on the envelope calculations“ ... and for the guided studies !

Transformation through a system of lattice elements

combine the single element solutions by multiplication of the matrices

$$M_{total} = M_{QF} * M_D * M_{QD} * M_{Bend} * M_{D*} \dots$$

$$\begin{pmatrix} x \\ x' \end{pmatrix}_{s2} = M(s2, s1) * \begin{pmatrix} x \\ x' \end{pmatrix}_{s1}$$

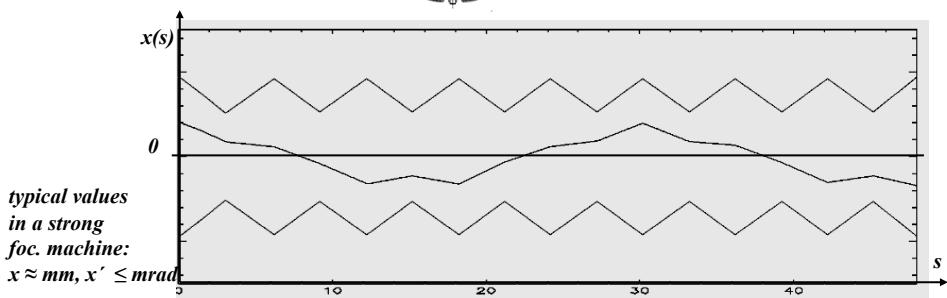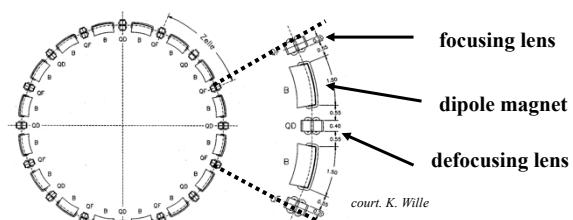


5.) Orbit & Tune:

Tune: number of oscillations per turn


**64.31
59.32**

**Relevant for beam stability:
non integer part**

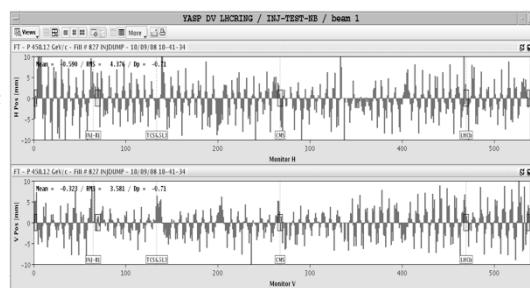


LHC revolution frequency: 11.3 kHz

$$0.31 * 11.3 \text{ kHz} = 3.5 \text{ kHz}$$

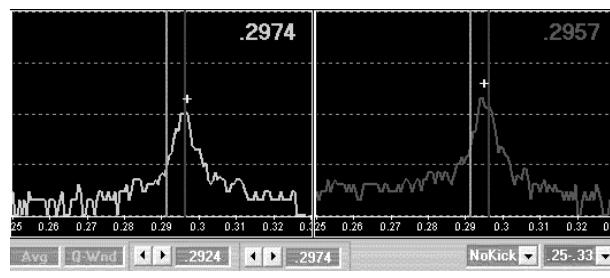

Question: what will happen, if the particle performs a second turn ?

... or a third one or ... 10^{10} turns

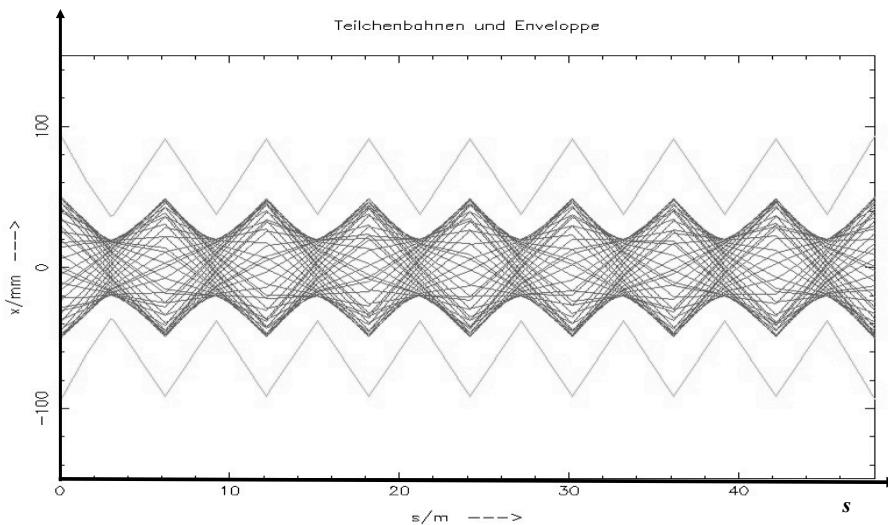

Astronomer Hill:

*differential equation for motions with periodic focusing properties
„Hill's equation“*



*Example: particle motion with
periodic coefficient*

equation of motion: $x''(s) - k(s)x(s) = 0$

*restoring force $\neq \text{const}$,
 $k(s)$ = depending on the position s
 $k(s+L) = k(s)$, periodic function* } *we expect a kind of quasi harmonic
oscillation: amplitude & phase will depend
on the position s in the ring.*

6.) The Beta Function

General solution of Hill's equation:

$$(i) \quad x(s) = \sqrt{\varepsilon} \sqrt{\beta(s)} \cdot \cos(\psi(s) + \phi)$$

ε, Φ = integration constants determined by initial conditions

$\beta(s)$ periodic function given by focusing properties of the lattice \leftrightarrow quadrupoles

$$\beta(s+L) = \beta(s)$$

Inserting (i) into the equation of motion ...

$$\psi(s) = \int_0^s \frac{ds}{\beta(s)}$$

$\Psi(s)$ = „phase advance“ of the oscillation between point „0“ and „ s “ in the lattice.
For one complete revolution: number of oscillations per turn „Tune“

$$Q_y = \frac{1}{2\pi} \oint \frac{ds}{\beta(s)}$$

7.) Beam Emittance and Phase Space Ellipse

general solution of Hill equation

$$\left\{ \begin{array}{ll} (1) & x(s) = \sqrt{\varepsilon} \sqrt{\beta(s)} \cos(\psi(s) + \phi) \\ (2) & x'(s) = -\frac{\sqrt{\varepsilon}}{\sqrt{\beta(s)}} \{ \alpha(s) \cos(\psi(s) + \phi) + \sin(\psi(s) + \phi) \} \end{array} \right.$$

from (1) we get

$$\cos(\psi(s) + \phi) = \frac{x(s)}{\sqrt{\varepsilon} \sqrt{\beta(s)}}$$

$$\alpha(s) = \frac{-1}{2} \beta'(s)$$

$$\gamma(s) = \frac{1 + \alpha(s)^2}{\beta(s)}$$

Insert into (2) and solve for ε

$$\varepsilon = \gamma(s) x^2(s) + 2\alpha(s)x(s)x'(s) + \beta(s) x'^2(s)$$


* ε is a constant of the motion ... it is independent of „s“

* parametric representation of an ellipse in the x - x' space

* shape and orientation of ellipse are given by α , β , γ


Beam Emittance and Phase Space Ellipse

$$\varepsilon = \gamma(s) x^2(s) + 2\alpha(s)x(s)x'(s) + \beta(s) x'^2(s)$$

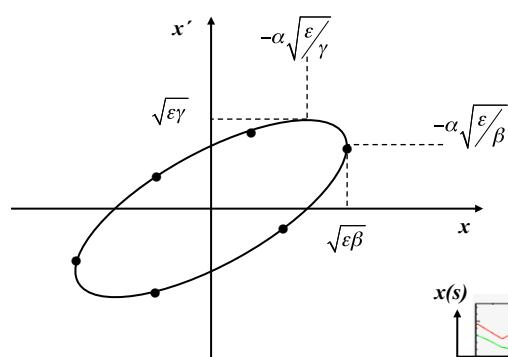

Liouville: in reasonable storage rings area in phase space is constant.

$$A = \pi * \varepsilon = \text{const}$$

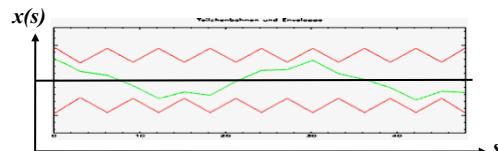

ε beam emittance = wozilycity of the particle ensemble, intrinsic beam parameter,
cannot be changed by the foc. properties.

Scientifiquely speaking: area covered in transverse x , x' phase space ... and it is constant !!!

Phase Space Ellipse

particle trajectory: $x(s) = \sqrt{\varepsilon} \sqrt{\beta(s)} \cos \{\psi(s) + \phi\}$

max. Amplitude: $\hat{x}(s) = \sqrt{\varepsilon \beta}$ \longrightarrow x' at that position ...?

... put $\hat{x}(s)$ into $\varepsilon = \gamma(s) x^2(s) + 2\alpha(s)x(s)x'(s) + \beta(s)x'^2(s)$ and solve for x'

$$\varepsilon = \gamma \cdot \varepsilon \beta + 2\alpha \sqrt{\varepsilon \beta} \cdot x' + \beta x'^2$$

$$\longrightarrow x' = -\alpha \cdot \sqrt{\varepsilon / \beta}$$

* A high β -function means a large beam size and a small beam divergence. !
... et vice versa !!!

* In the middle of a quadrupole $\beta = \text{maximum}$,
 $\alpha = \text{zero}$ } $x' = 0$
 ... and the ellipse is flat

Phase Space Ellipse

$$\varepsilon = \gamma(s) x^2(s) + 2\alpha(s)x(s)x'(s) + \beta(s)x'^2(s)$$

$$\alpha(s) = \frac{-1}{2} \beta'(s)$$

$$\gamma(s) = \frac{1 + \alpha(s)^2}{\beta(s)}$$


$$\longrightarrow \varepsilon = \frac{x^2}{\beta} + \frac{\alpha^2 x^2}{\beta} + 2\alpha \cdot x x' + \beta \cdot x'^2$$

$$\dots \text{solve for } x' \quad x'_{1,2} = \frac{-\alpha \cdot x \pm \sqrt{\varepsilon \beta - x^2}}{\beta}$$

$$\dots \text{and determine } \hat{x}' \text{ via:} \quad \frac{dx'}{dx} = 0$$

$$\longrightarrow \hat{x}' = \sqrt{\varepsilon \gamma}$$

$$\longrightarrow \hat{x} = \pm \alpha \sqrt{\varepsilon / \gamma}$$

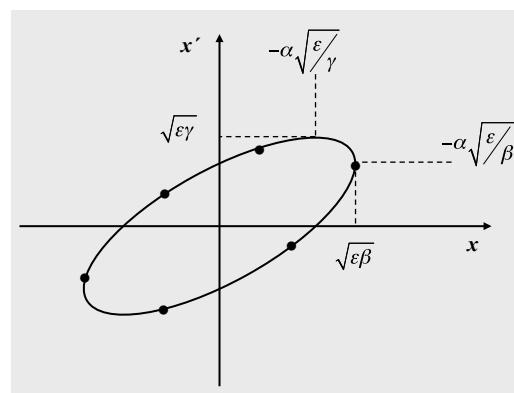


shape and orientation of the phase space ellipse
depend on the Twiss parameters $\beta \alpha \gamma$

Emittance of the Particle Ensemble:

$$x(s) = \sqrt{\epsilon} \sqrt{\beta(s)} \cdot \cos(\Psi(s) + \phi)$$

$$\hat{x}(s) = \sqrt{\epsilon} \sqrt{\beta(s)}$$

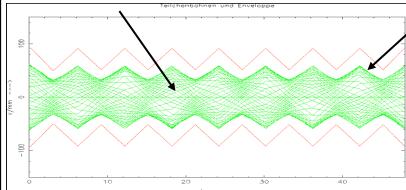



Gauß
Particle Distribution: $\rho(x) = \frac{N \cdot e}{\sqrt{2\pi}\sigma_x} \cdot e^{-\frac{1}{2}\frac{x^2}{\sigma_x^2}}$

particle at distance 1σ from centre $\leftrightarrow 68.3\%$ of all beam particles

single particle trajectories, $N \approx 10^{11}$ per bunch

vertical:

$$\sigma v_{\text{fit}} = 24.376 \cdot \mu\text{m}$$

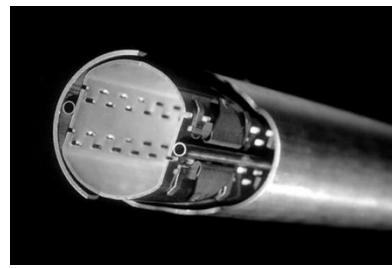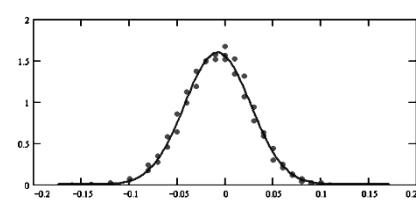

$$\text{LHC: } \sigma = \sqrt{\epsilon * \beta} = \sqrt{5 * 10^{-10} m * 180 m} = 0.3 \text{ mm}$$

$$\text{aperture requirements: } r_\theta = 10 * \sigma$$

8.) Transfer Matrix M ... yes we had the topic already

general solution
of Hill's equation

$$\left\{ \begin{array}{l} x(s) = \sqrt{\epsilon} \sqrt{\beta(s)} \cos \{\psi(s) + \phi\} \\ x'(s) = \frac{-\sqrt{\epsilon}}{\sqrt{\beta(s)}} [\alpha(s) \cos \{\psi(s) + \phi\} + \sin \{\psi(s) + \phi\}] \end{array} \right.$$

remember the trigonometrical gymnastics: $\sin(a+b) = \dots$ etc

$$\begin{aligned} x(s) &= \sqrt{\epsilon} \sqrt{\beta_s} (\cos \psi_s \cos \phi - \sin \psi_s \sin \phi) \\ x'(s) &= \frac{-\sqrt{\epsilon}}{\sqrt{\beta_s}} [\alpha_s \cos \psi_s \cos \phi - \alpha_s \sin \psi_s \sin \phi + \sin \psi_s \cos \phi + \cos \psi_s \sin \phi] \end{aligned}$$

starting at point $s(0) = s_0$, where we put $\Psi(0) = 0$

$$\left. \begin{aligned} \cos \phi &= \frac{x_0}{\sqrt{\epsilon} \beta_0}, \\ \sin \phi &= -\frac{1}{\sqrt{\epsilon}} (x'_0 \sqrt{\beta_0} + \frac{\alpha_0 x_0}{\sqrt{\beta_0}}) \end{aligned} \right\} \text{ inserting above ...}$$

$$\frac{x(s)}{x'(s)} = \sqrt{\frac{\beta_s}{\beta_0}} \left\{ \cos \psi_s + \alpha_0 \sin \psi_s \right\} x_0 + \sqrt{\beta_s \beta_0} \sin \psi_s \left\{ \sqrt{\frac{\beta_0}{\beta_s}} \left\{ \cos \psi_s - \alpha_s \sin \psi_s \right\} x'_0 \right\}$$

which can be expressed ... for convenience ... in matrix form

$$\begin{pmatrix} x \\ x' \end{pmatrix}_s = M \begin{pmatrix} x \\ x' \end{pmatrix}_0$$

$$M = \begin{pmatrix} \sqrt{\frac{\beta_s}{\beta_0}} (\cos \psi_s + \alpha_0 \sin \psi_s) & \sqrt{\beta_s \beta_0} \sin \psi_s \\ \frac{(\alpha_0 - \alpha_s) \cos \psi_s - (1 + \alpha_0 \alpha_s) \sin \psi_s}{\sqrt{\beta_s \beta_0}} & \sqrt{\frac{\beta_0}{\beta_s}} (\cos \psi_s - \alpha_s \sin \psi_s) \end{pmatrix}$$


- * we can calculate the single particle trajectories between two locations in the ring, if we know the α β γ at these positions.
 * and nothing but the α β γ at these positions.

* * !

* Äquivalenz der Matrizen

9.) Periodic Lattices

$$M = \begin{pmatrix} \sqrt{\frac{\beta_s}{\beta_0}} (\cos \psi_s + \alpha_0 \sin \psi_s) & \sqrt{\beta_s \beta_0} \sin \psi_s \\ \frac{(\alpha_0 - \alpha_s) \cos \psi_s - (1 + \alpha_0 \alpha_s) \sin \psi_s}{\sqrt{\beta_s \beta_0}} & \sqrt{\frac{\beta_0}{\beta_s}} (\cos \psi_s - \alpha_s \sin \psi_s) \end{pmatrix}$$

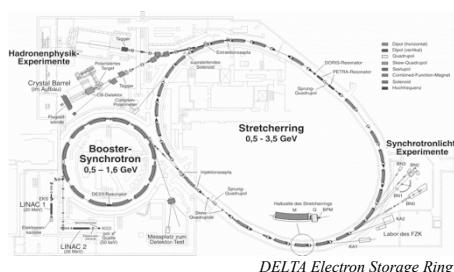

„This rather formidable looking matrix simplifies considerably if we consider one complete revolution.“

$$M(s) = \begin{pmatrix} \cos \psi_{turn} + \alpha_s \sin \psi_{turn} & \beta_s \sin \psi_{turn} \\ -\gamma_s \sin \psi_{turn} & \cos \psi_{turn} - \alpha_s \sin \psi_{turn} \end{pmatrix} \quad \psi_{turn} = \int_{\beta(s)}^{s+L} \frac{ds}{\beta(s)} \quad \psi_{turn} = \text{phase advance per period}$$

Tune: Phase advance per turn in units of 2π

$$Q = \frac{1}{2\pi} \oint \frac{ds}{\beta(s)}$$

Stability Criterion:

Question: what will happen, if we do not make too many mistakes and your particle performs one complete turn ?



Matrix for 1 turn:

$$M = \begin{pmatrix} \cos\psi_{turn} + \alpha_s \sin\psi_{turn} & \beta_s \sin\psi_{turn} \\ -\gamma_s \sin\psi_{turn} & \cos\psi_{turn} - \alpha_s \sin\psi_{turn} \end{pmatrix} = \underbrace{\cos\psi}_{I} \cdot \underbrace{\begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}}_{J} + \underbrace{\sin\psi}_{J} \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix}$$

Matrix for N turns:

$$M^N = (I \cdot \cos\psi + J \cdot \sin\psi)^N = I \cdot \cos N\psi + J \cdot \sin N\psi$$

The motion for N turns remains bounded, if the elements of M^N remain bounded

$$\psi = \text{real} \quad \Leftrightarrow \quad |\cos\psi| \leq 1 \quad \Leftrightarrow \quad \text{Tr}(M) \leq 2$$

stability criterion proof for the disbelieving colleagues !!

$$\text{Matrix for 1 turn: } M = \begin{pmatrix} \cos\psi_{turn} + \alpha_s \sin\psi_{turn} & \beta_s \sin\psi_{turn} \\ -\gamma_s \sin\psi_{turn} & \cos\psi_{turn} - \alpha_s \sin\psi_{turn} \end{pmatrix} = \underbrace{\cos\psi}_{I} \cdot \underbrace{\begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}}_{J} + \underbrace{\sin\psi}_{J} \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix}$$

Matrix for 2 turns:

$$\begin{aligned} M^2 &= (I \cos\psi_1 + J \sin\psi_1)(I \cos\psi_2 + J \sin\psi_2) \\ &= I^2 \cos\psi_1 \cos\psi_2 + IJ \cos\psi_1 \sin\psi_2 + JI \sin\psi_1 \cos\psi_2 + J^2 \sin\psi_1 \sin\psi_2 \end{aligned}$$

now ...

$$I^2 = I$$

$$\left. \begin{array}{l} IJ = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} * \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} = \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} \\ JI = \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} * \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} = \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} \\ J^2 = \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} * \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} = \begin{pmatrix} \alpha^2 - \gamma\beta & \alpha\beta - \beta\alpha \\ -\gamma\alpha + \alpha\gamma & \alpha^2 - \gamma\beta \end{pmatrix} = \begin{pmatrix} -1 & 0 \\ 0 & -1 \end{pmatrix} = -I \end{array} \right\} IJ = JI$$

$$M^2 = I \cos(2\psi) + J \sin(2\psi)$$


$$M^2 = I \cos(2\psi) + J \sin(2\psi)$$

10.) Transformation of α, β, γ

consider two positions in the storage ring: s_0, s

$$\begin{pmatrix} \mathbf{x} \\ \mathbf{x}' \end{pmatrix}_s = M * \begin{pmatrix} \mathbf{x} \\ \mathbf{x}' \end{pmatrix}_{s_0}$$

$$M = \begin{pmatrix} m_{11} & m_{12} \\ m_{21} & m_{22} \end{pmatrix}$$

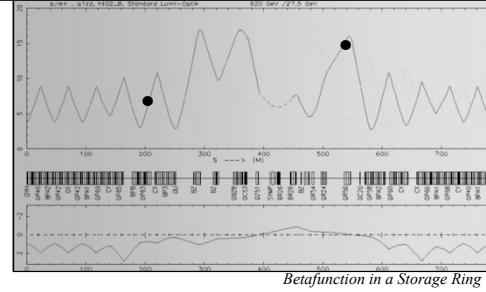

since $\varepsilon = \text{const (Liouville)}$:

$$\begin{aligned} \varepsilon &= \beta_s \mathbf{x}'^2 + 2\alpha_s \mathbf{x} \mathbf{x}' + \gamma_s \mathbf{x}^2 \\ \varepsilon &= \beta_0 \mathbf{x}'_0^2 + 2\alpha_0 \mathbf{x}_0 \mathbf{x}'_0 + \gamma_0 \mathbf{x}_0^2 \end{aligned}$$

... remember $W = CS^{-1}SC' = I$

$$\left. \begin{aligned} \begin{pmatrix} \mathbf{x} \\ \mathbf{x}' \end{pmatrix}_0 &= M^{-1} * \begin{pmatrix} \mathbf{x} \\ \mathbf{x}' \end{pmatrix}_s \\ M^{-1} &= \begin{pmatrix} m_{22} & -m_{12} \\ -m_{21} & m_{11} \end{pmatrix} \end{aligned} \right\} \rightarrow \begin{aligned} x_0 &= m_{22}x - m_{12}x' \\ x'_0 &= -m_{21}x + m_{11}x' \end{aligned} \quad \dots \text{inserting into } \varepsilon$$

$$\varepsilon = \beta_0(m_{11}x' - m_{21}x)^2 + 2\alpha_0(m_{22}x - m_{12}x')(m_{11}x' - m_{21}x) + \gamma_0(m_{22}x - m_{12}x')^2$$

sort via x, x' and compare the coefficients to get

The Twiss parameters α, β, γ can be transformed through the lattice via the matrix elements defined above.

$$\begin{aligned} \beta(s) &= m_{11}^2 \beta_0 - 2m_{11}m_{12}\alpha_0 + m_{12}^2\gamma_0 \\ \alpha(s) &= -m_{11}m_{21}\beta_0 + (m_{12}m_{21} + m_{11}m_{22})\alpha_0 - m_{12}m_{22}\gamma_0 \\ \gamma(s) &= m_{21}^2\beta_0 - 2m_{21}m_{22}\alpha_0 + m_{22}^2\gamma_0 \end{aligned}$$

in matrix notation:

$$\begin{pmatrix} \beta \\ \alpha \\ \gamma \end{pmatrix}_{s_2} = \begin{pmatrix} m_{11}^2 & -2m_{11}m_{12} & m_{12}^2 \\ -m_{11}m_{21} & m_{12}m_{21} + m_{22}m_{11} & -m_{12}m_{22} \\ m_{21}^2 & -2m_{21}m_{22} & m_{22}^2 \end{pmatrix} * \begin{pmatrix} \beta \\ \alpha \\ \gamma \end{pmatrix}_{s_1}$$

!

1.) this expression is important

2.) given the twiss parameters α, β, γ at any point in the lattice we can transform them and calculate their values at any other point in the ring.

3.) the transfer matrix is given by the focusing properties of the lattice elements, the elements of M are just those that we used to calculate single particle trajectories.

4.) go back to point 1.)

II.) Acceleration and Momentum Spread

The „not so ideal world“

Remember:

Beam Emittance and Phase Space Ellipse:

$$\text{equation of motion: } x''(s) - k(s)x(s) = 0$$

$$\text{general solution of Hills equation: } x(s) = \sqrt{\varepsilon} \sqrt{\beta(s)} \cos(\psi(s) + \varphi)$$

$$\text{beam size: } \sigma = \sqrt{\varepsilon\beta} \approx \text{"mm"}$$

$$\varepsilon = \gamma(s) x^2(s) + 2\alpha(s)x(s)x'(s) + \beta(s)x'^2(s)$$


$$\alpha(s) = \frac{-1}{2}\beta'(s)$$

$$\gamma(s) = \frac{1+\alpha(s)^2}{\beta(s)}$$

* ε is a constant of the motion ... it is independent of „s“

* parametric representation of an ellipse in the $x x'$ space

* shape and orientation of ellipse are given by α, β, γ

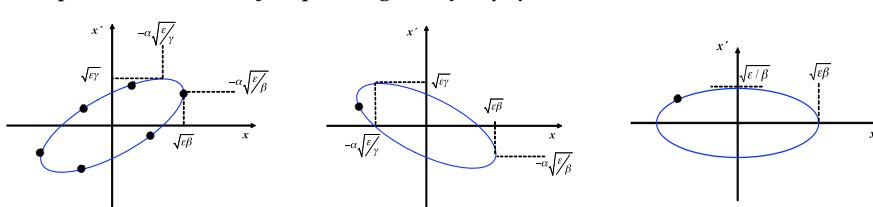


11.) Liouville during Acceleration

$$\varepsilon = \gamma(s) x^2(s) + 2\alpha(s)x(s)x'(s) + \beta(s)x'^2(s)$$

Beam Emittance corresponds to the area covered in the x, x' Phase Space Ellipse

Liouville: Area in phase space is constant.



But so sorry ... $\varepsilon \neq \text{const}!$

Classical Mechanics:

*phase space = diagram of the two canonical variables
position & momentum*

$$x \quad p_x$$

$$p_j = \frac{\partial L}{\partial \dot{q}_j} \quad ; \quad L = T - V = \text{kin. Energy} - \text{pot. Energy}$$

*According to Hamiltonian mechanics:
phase space diagram relates the variables q and p*

$$q = \text{position} = x \quad \gamma = \frac{1}{\sqrt{1 - \frac{v^2}{c^2}}} \quad ; \quad \beta_x = \frac{\dot{x}}{c}$$

$$p = \text{momentum} = \gamma m v = m c \gamma \beta_x$$

$$\text{Liouville's Theorem: } \int p dq = \text{const}$$

for convenience (i.e. because we are lazy b ones) we use in accelerator theory:

$$x' = \frac{dx}{ds} = \frac{dx}{dt} \frac{dt}{ds} = \frac{\beta_x}{\gamma} \quad \text{where } \beta_x = v_x/c$$

$$\int p dq = mc \int \gamma \beta_x dx$$

$$\int p dq = mc \gamma \beta \underbrace{\int x' dx}_{\varepsilon}$$

$$\Rightarrow \varepsilon = \int x' dx \propto \frac{1}{\beta \gamma} \quad \text{the beam emittance shrinks during acceleration} \quad \varepsilon \sim 1/\gamma$$



Nota bene:

- 1.) A proton machine ... or an electron linac ... needs the highest aperture at injection energy !!!
as soon as we start to accelerate the beam size shrinks as $\gamma^{-1/2}$ in both planes.

$$\sigma = \sqrt{\varepsilon \beta}$$

- 2.) At lowest energy the machine will have the major aperture problems,
→ here we have to minimise β



- 3.) we need different beam optics adopted to the energy:
A Mini Beta concept will only be adequate at flat top.

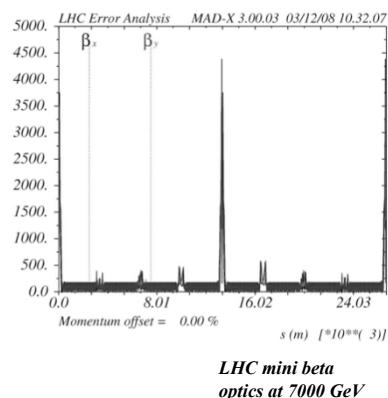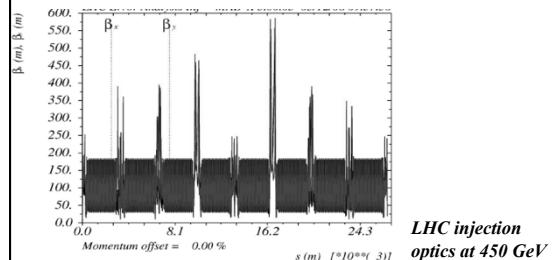

Example: HERA proton ring

injection energy: 40 GeV $\gamma = 43$
flat top energy: 920 GeV $\gamma = 980$

emittance ε (40GeV) = $1.2 * 10^{-7}$
 ε (920GeV) = $5.1 * 10^{-9}$

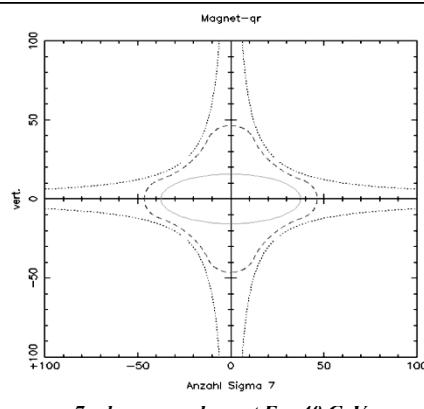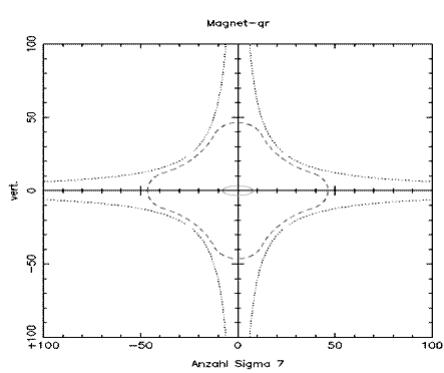


... and at E = 920 GeV

12.) The „ $\Delta p / p \neq 0$ “ Problem

Linear Accelerator


Energy Gain per „Gap“:

$$W = q U_0 \sin \omega_{RF} t$$

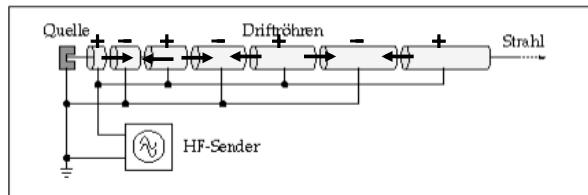


drift tube structure at a proton linac

1928, Wideroe

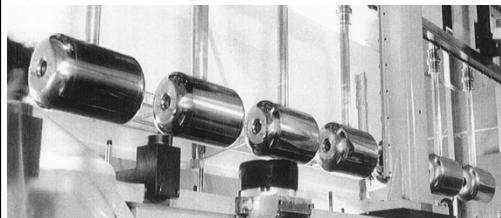


500 MHz cavities in an electron storage ring

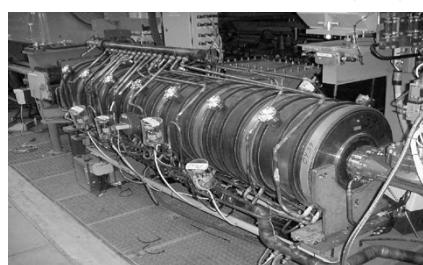


* RF Acceleration: multiple application of the same acceleration voltage;
brilliant idea to gain higher energies
... but changing acceleration voltage

Problem: panta rheo !!!

(Heraklit: 540-480 v. Chr.)



Example: HERA RF:

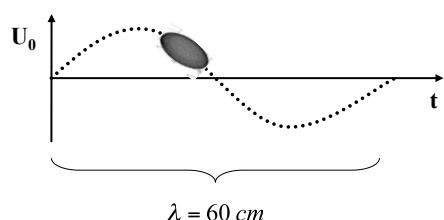

Bunch length of Electrons $\approx 1\text{cm}$

$$\left. \begin{aligned} \nu &= 500 \text{ MHz} \\ c &= \lambda \nu \end{aligned} \right\} \quad \lambda = 60 \text{ cm}$$

$$\sin(90^\circ) = 1$$

$$\sin(84^\circ) = 0.994$$

$$\frac{\Delta U}{U} = 6.0 \cdot 10^{-3}$$


typical momentum spread of an electron bunch:

$$\frac{\Delta p}{p} \approx 1.0 \cdot 10^{-3}$$

13.) Dispersion: trajectories for $\Delta p / p \neq 0$

Force acting on the particle

$$F = m \frac{d^2}{dt^2} (x + \rho) - \frac{mv^2}{x + \rho} = e B_y v$$



remember: $x \approx mm, \rho \approx m \dots \rightarrow$ develop for small x

$$m \frac{d^2 x}{dt^2} - \frac{mv^2}{\rho} (1 - \frac{x}{\rho}) = e B_y v$$

consider only linear fields, and change independent variable: $t \rightarrow s \quad B_y = B_0 + x \frac{\partial B_y}{\partial x}$

$$x'' - \frac{1}{\rho} (1 - \frac{x}{\rho}) = \underbrace{\frac{e B_0}{mv}}_{\text{no dispersion}} + \underbrace{\frac{e x g}{mv}}_{\text{dispersion}} \quad p = p_0 + \Delta p$$

... but now take a small momentum error into account !!!

Dispersion:

$$\text{develop for small momentum error} \quad \Delta p \ll p_0 \Rightarrow \frac{1}{p_0 + \Delta p} \approx \frac{1}{p_0} - \frac{\Delta p}{p_0^2}$$

$$x'' - \frac{1}{\rho} + \frac{x}{\rho^2} \approx \underbrace{\frac{e B_0}{p_0}}_{-\frac{1}{\rho}} - \underbrace{\frac{\Delta p}{p_0^2} e B_0}_{k * x} + \underbrace{\frac{x e g}{p_0}}_{\frac{1}{\rho}} - \underbrace{\frac{x e g \Delta p}{p_0^2}}_{\approx 0}$$

$$x'' + \frac{x}{\rho^2} \approx \underbrace{\frac{\Delta p}{p_0} * \frac{(-e B_0)}{p_0}}_{\frac{1}{\rho}} + k * x = \frac{\Delta p}{p_0} * \frac{1}{\rho} + k * x$$

$$x'' + \frac{x}{\rho^2} - kx = \frac{\Delta p}{p_0} \frac{1}{\rho} \quad \longrightarrow \quad x'' + x(\frac{1}{\rho^2} - k) = \frac{\Delta p}{p_0} \frac{1}{\rho}$$

Momentum spread of the beam adds a term on the r.h.s. of the equation of motion.
 \rightarrow inhomogeneous differential equation.

Dispersion:

$$x'' + x \left(\frac{1}{\rho^2} - k \right) = \frac{\Delta p}{p} \cdot \frac{1}{\rho}$$

general solution:

$$x(s) = x_h(s) + x_i(s)$$

$$\begin{cases} x_h''(s) + K(s) \cdot x_h(s) = 0 \\ x_i''(s) + K(s) \cdot x_i(s) = \frac{1}{\rho} \cdot \frac{\Delta p}{p} \end{cases}$$

Normalise with respect to $\Delta p/p$:

$$D(s) = \frac{x_i(s)}{\frac{\Delta p}{p}}$$

Dispersion function $D(s)$


* is that special orbit, an ideal particle would have for $\Delta p/p = 1$

* the orbit of any particle is the sum of the well known x_β and the dispersion

* as $D(s)$ is just another orbit it will be subject to the focusing properties of the lattice

Dispersion

Example: homogeneous dipole field

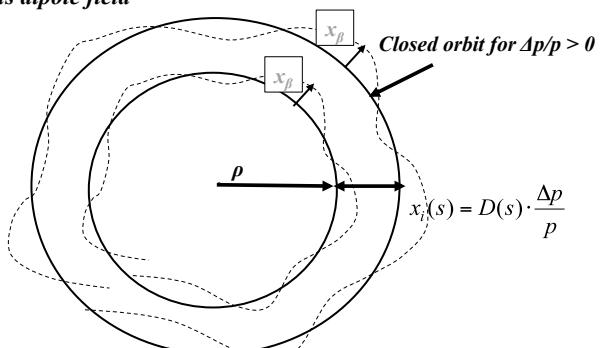

Matrix formalism:

e.g. matrix for a quadrupole lens:

$$M_{\text{foc}} = \begin{pmatrix} \cos(\sqrt{|K|}s) & \frac{1}{\sqrt{|K|}} \sin(\sqrt{|K|}s) \\ -\sqrt{|K|} \sin(\sqrt{|K|}s) & \cos(\sqrt{|K|}s) \end{pmatrix} = \begin{pmatrix} C & S \\ C' & S' \end{pmatrix}$$

$$\left. \begin{array}{l} x(s) = x_\beta(s) + D(s) \cdot \frac{\Delta p}{p} \\ x(s) = C(s) \cdot x_0 + S(s) \cdot x'_0 + D(s) \cdot \frac{\Delta p}{p} \end{array} \right\} \quad \begin{pmatrix} x \\ x' \end{pmatrix}_s = \begin{pmatrix} C & S \\ C' & S' \end{pmatrix} \begin{pmatrix} x \\ x' \end{pmatrix}_0 + \frac{\Delta p}{p} \begin{pmatrix} D \\ D' \end{pmatrix}$$


or expressed as 3x3 matrix

$$\begin{pmatrix} x \\ x' \\ \Delta p/p \end{pmatrix}_s = \begin{pmatrix} C & S & D \\ C' & S' & D' \\ 0 & 0 & 1 \end{pmatrix} \cdot \begin{pmatrix} x \\ x' \\ \Delta p/p \end{pmatrix}_0$$

Example HERA

$$\left. \begin{array}{l} x_\beta = 1 \dots 2 \text{ mm} \\ D(s) \approx 1 \dots 2 \text{ m} \\ \Delta p/p \approx 1 \cdot 10^{-3} \end{array} \right\}$$

*Amplitude of Orbit oscillation
contribution due to Dispersion \approx beam size
 \rightarrow Dispersion must vanish at the collision point*

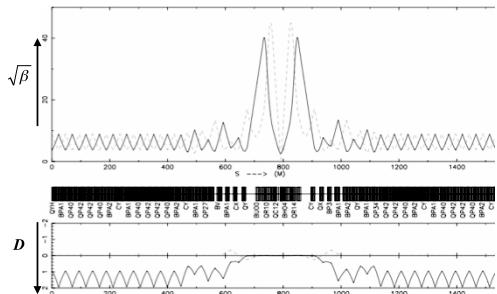

Calculate D, D'

$$D(s) = S(s) \underbrace{\int_{s_0}^{s_1} \frac{1}{\rho} C(\tilde{s}) d\tilde{s}}_{=0} - C(s) \underbrace{\int_{s_0}^{s_1} \frac{1}{\rho} S(\tilde{s}) d\tilde{s}}_{=0}$$

(proof: see appendix)

Example: Drift

$$M_{Drift} = \begin{pmatrix} 1 & l \\ 0 & 1 \end{pmatrix}$$

$$D(s) = S(s) \underbrace{\int_{s_0}^{s_1} \frac{1}{\rho} C(\tilde{s}) d\tilde{s}}_{=0} - C(s) \underbrace{\int_{s_0}^{s_1} \frac{1}{\rho} S(\tilde{s}) d\tilde{s}}_{=0}$$

Example: Dipole

$$M_{Dipole} = \begin{pmatrix} \cos(\sqrt{|K|}s) & \frac{1}{\sqrt{|K|}} \sin(\sqrt{|K|}s) \\ -\sqrt{|K|} \sin(\sqrt{|K|}s) & \cos(\sqrt{|K|}s) \end{pmatrix}_0$$

$$K = \frac{1}{\rho^2} \cancel{\times}$$

$s = l_B$

$$M_{Dipole} = \begin{pmatrix} \cos \frac{l}{\rho} & \rho \sin \frac{l}{\rho} \\ -\frac{1}{\rho} \sin \frac{l}{\rho} & \cos \frac{l}{\rho} \end{pmatrix} \quad \rightarrow$$


$$D(s) = \rho \cdot (1 - \cos \frac{l}{\rho})$$

$$D'(s) = \sin \frac{l}{\rho}$$

Example: Dispersion, calculated by an optics code for a real machine


$$x_D = D(s) \frac{\Delta p}{p}$$

- * $D(s)$ is created by the dipole magnets
... and afterwards focused by the quadrupole fields

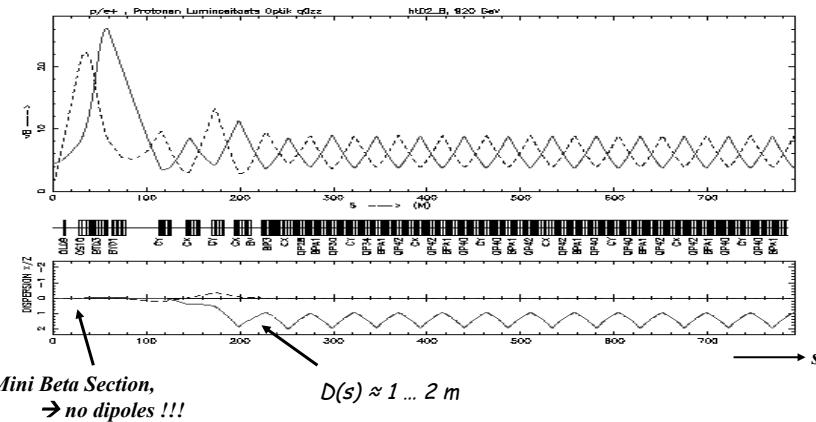


Dispersion is visible

HERA Standard Orbit

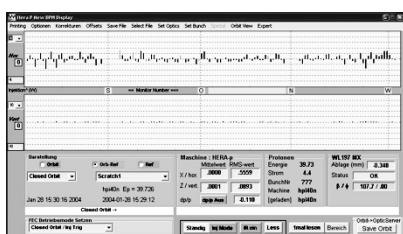

HERA Dispersion Orbit

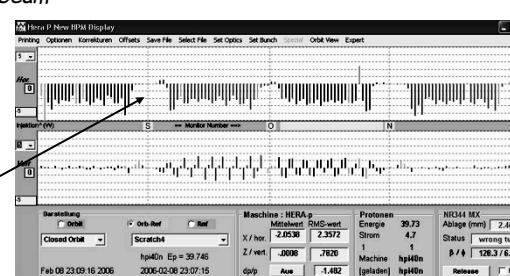

dedicated energy change of the stored beam
→ closed orbit is moved to a
dispersions trajectory


$$x_d = D(s) * \frac{\Delta p}{p}$$

14.) Momentum Compaction Factor: α_p

particle with a displacement x to the design orbit
 \rightarrow path length $dl \dots$

$$\frac{dl}{ds} = \frac{\rho + x}{\rho}$$

$$\rightarrow dl = \left(1 + \frac{x}{\rho(s)}\right) ds$$

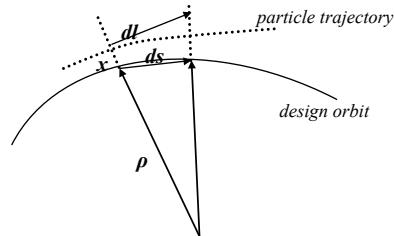

circumference of an off-energy closed orbit

$$l_{\Delta E} = \oint dl = \oint \left(1 + \frac{x_{\Delta E}}{\rho(s)}\right) ds$$

remember:
 $x_{\Delta E}(s) = D(s) \frac{\Delta p}{p}$

$$\delta l_{\Delta E} = \frac{\Delta p}{p} \oint \left(\frac{D(s)}{\rho(s)}\right) ds$$

* The lengthening of the orbit for off-momentum particles is given by the dispersion function and the bending radius.

Definition: $\frac{\delta l_e}{L} = \alpha_p \frac{\Delta p}{p}$

$$\rightarrow \alpha_p = \frac{1}{L} \oint \left(\frac{D(s)}{\rho(s)}\right) ds$$

For first estimates assume: $\frac{1}{\rho} = \text{const.}$

$$\int_{dipoles} D(s) ds \approx I_{\Sigma(dipoles)} \cdot \langle D \rangle_{dipole}$$

$$\alpha_p = \frac{1}{L} I_{\Sigma(dipoles)} \cdot \langle D \rangle \frac{1}{\rho} = \frac{1}{L} 2\pi\rho \cdot \langle D \rangle \frac{1}{\rho} \quad \rightarrow \quad \alpha_p \approx \frac{2\pi}{L} \langle D \rangle \approx \frac{\langle D \rangle}{R}$$

Assume: $v \approx c$


$$\rightarrow \frac{\delta T}{T} = \frac{\delta l_e}{L} = \alpha_p \frac{\Delta p}{p}$$

α_p combines via the dispersion function the momentum spread with the longitudinal motion of the particle.

15.) Gradient Errors

Matrix in Twiss Form

Transfer Matrix from point „0“ in the lattice to point „s“:

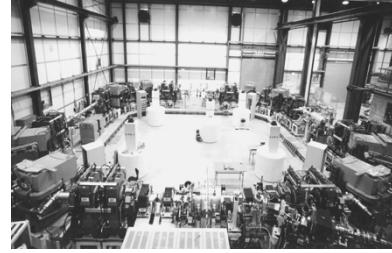

$$M(s) = \begin{pmatrix} \sqrt{\frac{\beta_s}{\beta_0}}(\cos\psi_s + \alpha_0 \sin\psi_s) & \sqrt{\beta_s \beta_0} \sin\psi_s \\ \frac{(\alpha_0 - \alpha_s)\cos(\psi_s - (1 + \alpha_0)\alpha_s)\sin\psi_s}{\sqrt{\beta_s \beta_0}} & \sqrt{\frac{\beta_0}{\beta_s}}(\cos(\psi_s - \alpha_0 \sin\psi_s)) \end{pmatrix}$$

For one complete turn the Twiss parameters have to obey periodic boundary conditions:


$$\begin{aligned} \beta(s+L) &= \beta(s) \\ \alpha(s+L) &= \alpha(s) \\ \gamma(s+L) &= \gamma(s) \end{aligned}$$

$$M(s) = \begin{pmatrix} \cos\psi_{turn} + \alpha_s \sin\psi_{turn} & \beta_s \sin\psi_{turn} \\ -\gamma_s \sin\psi_s & \cos\psi_{turn} - \alpha_s \sin\psi_{turn} \end{pmatrix}$$

Quadrupole Error in the Lattice

optical perturbation described by thin lens quadrupole

$$M_{dist} = M_{\Delta k} \cdot M_0 = \underbrace{\begin{pmatrix} 1 & 0 \\ \Delta kds & 1 \end{pmatrix}}_{quad error} \cdot \underbrace{\begin{pmatrix} \cos\psi_{turn} + \alpha \sin\psi_{turn} & \beta \sin\psi_{turn} \\ -\gamma \sin\psi_{turn} & \cos\psi_{turn} - \alpha \sin\psi_{turn} \end{pmatrix}}_{ideal storage ring}$$



$$M_{dist} = \begin{pmatrix} \cos\psi_0 + \alpha \sin\psi_0 & \beta \sin\psi_0 \\ \Delta kds(\cos\psi_0 + \alpha \sin\psi_0) - \gamma \sin\psi_0 & \Delta kds \beta \sin\psi_0 + \cos\psi_0 - \alpha \sin\psi_0 \end{pmatrix}$$

rule for getting the tune

$$Trace(M) = 2 \cos\psi = 2 \cos\psi_0 + \Delta kds \beta \sin\psi_0$$

Quadrupole error \rightarrow Tune Shift

$$\psi = \psi_0 + \Delta\psi \quad \longrightarrow \quad \cos(\psi_0 + \Delta\psi) = \cos\psi_0 + \frac{\Delta kds\beta \sin\psi_0}{2}$$

remember the old fashioned trigonometric stuff and assume that the error is small !!!

$$\underbrace{\cos\psi_0 \cos\Delta\psi - \sin\psi_0 \sin\Delta\psi}_{\approx 1} = \cos\psi_0 + \frac{\Delta kds\beta \sin\psi_0}{2} \underbrace{\approx \Delta\psi}_{\approx \Delta\psi}$$

$$\Delta\psi = \frac{kds\beta}{2}$$


and referring to Q instead of ψ :

$$\psi = 2\pi Q$$

$$\Delta Q = \int_{s0}^{s0+l} \frac{\Delta k(s)\beta(s)ds}{4\pi}$$


- ! the tune shift is proportional to the β -function at the quadrupole
- !! field quality, power supply tolerances etc are much tighter at places where β is large
- !!! mini beta quads: $\beta \approx 1900$ m
arc quads: $\beta \approx 80$ m
- !!!! β is a measure for the sensitivity of the beam

a quadrupole error leads to a shift of the tune:

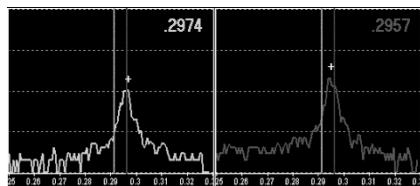


$$\Delta Q = \int_{s0}^{s0+l} \frac{\Delta k\beta(s) ds}{4\pi} \approx \frac{\Delta k l_{quad} \bar{\beta}}{4\pi}$$

Example: measurement of β in a storage ring:
tune spectrum

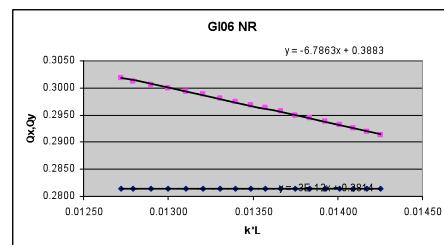

16.) Chromaticity: A Quadrupole Error for $\Delta p/p \neq 0$

Influence of external fields on the beam: prop. to magn. field & prop. zu $1/p$

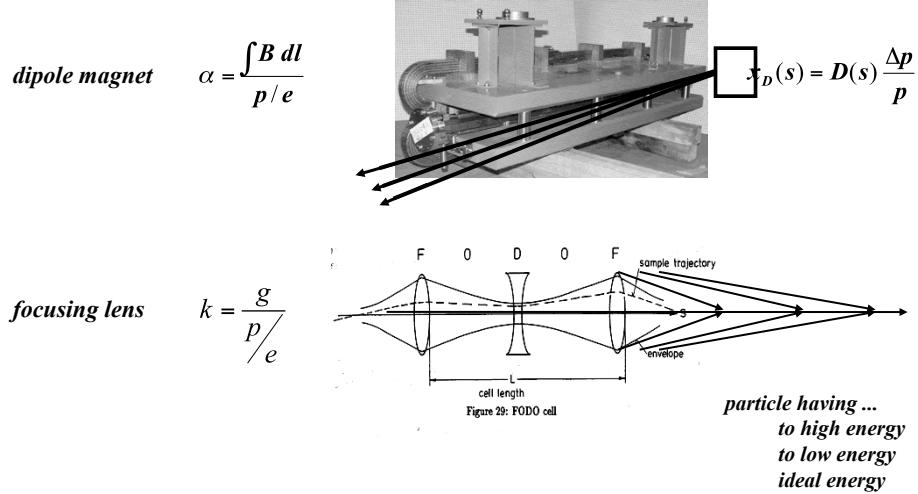

Chromaticity: Q'

$$k = \frac{g}{p/e} \quad p = p_0 + \Delta p$$

in case of a momentum spread:

$$k = \frac{eg}{p_0 + \Delta p} \approx \frac{e}{p_0} \left(1 - \frac{\Delta p}{p_0}\right) g = k_0 + \Delta k$$

$$\Delta k = -\frac{\Delta p}{p_0} k_0$$

... which acts like a quadrupole error in the machine and leads to a tune spread:

$$\Delta Q = -\frac{1}{4\pi} \frac{\Delta p}{p_0} k_0 \beta(s) ds$$

definition of chromaticity:

$$\Delta Q = Q' \frac{\Delta p}{p} ; \quad Q' = -\frac{1}{4\pi} \oint k(s) \beta(s) ds$$

... what is wrong about Chromaticity:

Problem: chromaticity is generated by the lattice itself !!

Q' is a number indicating the size of the tune spot in the working diagram,
 Q' is always created if the beam is focussed

→ it is determined by the focusing strength k of all quadrupoles

$$Q' = -\frac{1}{4\pi} \oint k(s) \beta(s) ds$$

k = quadrupole strength

β = betafunction indicates the beam size ... and even more the sensitivity of
 the beam to external fields

Example: LHC

$$\left. \begin{array}{l} Q' = 250 \\ \Delta p/p = \pm 0.2 * 10^{-3} \\ \Delta Q = 0.256 \dots 0.36 \end{array} \right\} \rightarrow \begin{array}{l} \text{Some particles get very close to} \\ \text{resonances and are lost} \\ \text{in other words: the tune is not a point} \\ \text{it is a pancake} \end{array}$$


Correction of Q' :

1.) sort the particles according to their momentum $x_D(s) = D(s) \frac{\Delta p}{p}$

2.) apply a magnetic field that rises quadratically with x (sextupole field)

$$\left. \begin{array}{l} B_x = \tilde{g} x z \\ B_z = \frac{1}{2} \tilde{g} (x^2 - z^2) \end{array} \right\} \quad \frac{\partial B_x}{\partial z} = \frac{\partial B_z}{\partial x} = \tilde{g} x \quad \text{linear rising "gradient":}$$

Sextupole Magnets:

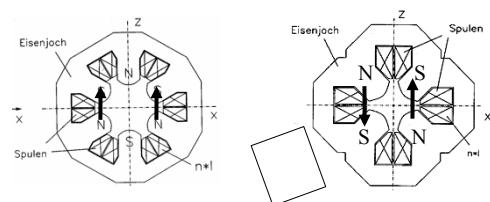

normalised quadrupole strength:


$$k_{\text{sext}} = \frac{\tilde{g} x}{p/e} = m_{\text{sext.}} x$$

$$k_{\text{sext}} = m_{\text{sext.}} D \frac{\Delta p}{p}$$

$$\text{corrected chromaticity: } Q' = -\frac{1}{4\pi} \oint [K(s) - m D(s)] \beta(s) ds$$

Chromaticity in the FoDo Lattice

$$Q' = \frac{-1}{4\pi} * \oint k(s) \beta(s) ds$$

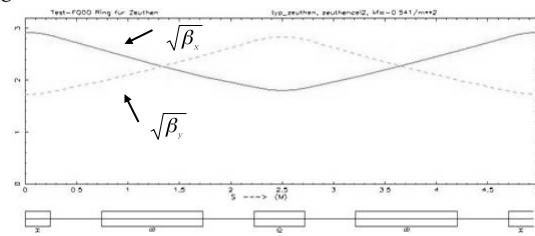

β-Function in a FoDo

$$\hat{\beta} = \frac{(1 + \sin \frac{\psi_{cell}}{2})L}{\sin \psi_{cell}} \quad \bar{\beta} = \frac{(1 - \sin \frac{\psi_{cell}}{2})L}{\sin \psi_{cell}}$$

$$Q' = \frac{-1}{4\pi} N * \frac{\hat{\beta} - \bar{\beta}}{f_Q}$$

$$Q' = \frac{-1}{4\pi} N * \frac{1}{f_Q} * \left\{ \frac{L(1 + \sin \frac{\psi_{cell}}{2}) - L(1 - \sin \frac{\psi_{cell}}{2})}{\sin \mu} \right\}$$

using some TLC transformations ... ξ can be expressed in a very simple form:

$$Q' = \frac{-1}{4\pi} N * \frac{1}{f_Q} * \frac{2L \sin \frac{\psi_{cell}}{2}}{\sin \psi_{cell}}$$

$$Q' = \frac{-1}{4\pi} N * \frac{1}{f_Q} * \frac{L \sin \frac{\psi_{cell}}{2}}{\sin \frac{\psi_{cell}}{2} \cos \frac{\psi_{cell}}{2}}$$

remember ...
 $\sin x = 2 \sin \frac{x}{2} \cos \frac{x}{2}$

$$Q'_{cell} = \frac{-1}{4\pi f_Q} * \frac{L \tan \frac{\psi_{cell}}{2}}{\sin \frac{\psi_{cell}}{2}}$$

putting ...
 $\sin \frac{\psi_{cell}}{2} = \frac{L}{4f_Q}$


$$Q'_{cell} = \frac{-1}{\pi} * \tan \frac{\psi_{cell}}{2}$$

contribution of one FoDo Cell to the chromaticity of the ring:

Chromaticity

$$Q' = -\frac{1}{4\pi} \oint K(s) \beta(s) ds$$

question: main contribution to ξ in a lattice ... ?

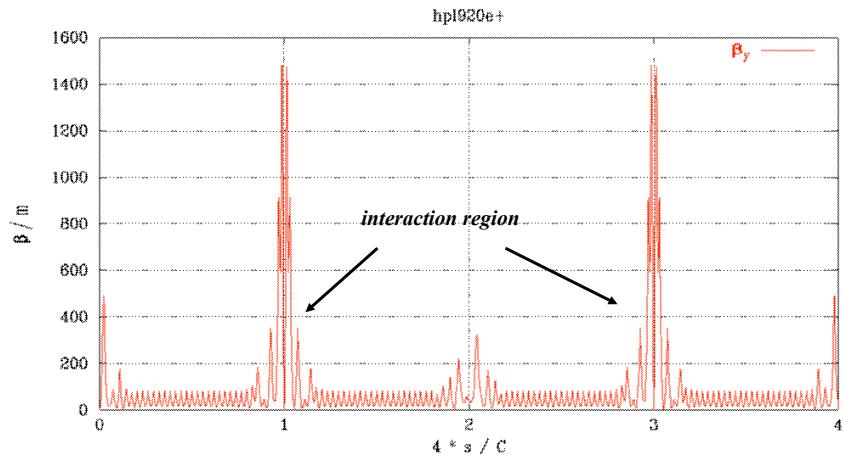

17.) Résumé:

beam rigidity: $B \cdot \rho = p/q$

bending strength of a dipole: $\frac{1}{\rho} [m^{-1}] = \frac{0.2998 \cdot B_0(T)}{p(GeV/c)}$

focusing strength of a quadrupole: $k [m^{-2}] = \frac{0.2998 \cdot g}{p(GeV/c)}$

focal length of a quadrupole: $f = \frac{1}{k \cdot l_q}$

equation of motion: $x'' + Kx = \frac{1}{\rho} \frac{\Delta p}{p}$

matrix of a foc. quadrupole: $x_{s2} = M \cdot x_{s1}$

$$M = \begin{pmatrix} \cos \sqrt{|K|}l & \frac{1}{\sqrt{|K|}} \sin \sqrt{|K|}l \\ -\sqrt{|K|} \sin \sqrt{|K|}l & \cos \sqrt{|K|}l \end{pmatrix}, \quad M = \begin{pmatrix} 1 & 0 \\ \frac{1}{f} & 1 \end{pmatrix}$$

Resume':	<i>beam emittance:</i>	$\varepsilon \propto \frac{1}{\beta\gamma}$
<i>beta function in a drift:</i>		$\beta(s) = \beta_0 - 2\alpha_0 s + \gamma_0 s^2$
<i>... and for $\alpha = 0$</i>		$\beta(s) = \beta_0 + \frac{s^2}{\beta_0}$
<i>particle trajectory for $\Delta p/p \neq 0$ inhomogenous equation:</i>		$x'' + x(\frac{1}{\rho^2} - k) = \frac{\Delta p}{p_0} \frac{1}{\rho}$
<i>... and its solution:</i>		$x(s) = x_\beta(s) + D(s) \cdot \frac{\Delta p}{p}$
<i>momentum compaction:</i>		$\frac{\delta I_c}{L} = \alpha_{cp} \frac{\Delta p}{p} \quad \alpha_{cp} \approx \frac{2\pi}{L} \langle D \rangle \approx \frac{\langle D \rangle}{R}$
<i>quadrupole error:</i>		$\Delta Q = \int_{s0}^{s0+l} \frac{\Delta K(s)\beta(s)ds}{4\pi}$
<i>chromaticity:</i>		$Q' = -\frac{1}{4\pi} \oint K(s)\beta(s)ds$

18.) Bibliography

- 1.) Klaus Wille, *Physics of Particle Accelerators and Synchrotron Radiation Facilities*, Teubner, Stuttgart 1992
- 2.) M.S. Livingston, J.P. Blewett: *Particle Accelerators*, Mc Graw-Hill, New York, 1962
- 3.) H. Wiedemann, *Particle Accelerator Physics* (Springer-Verlag, Berlin, 1993)
- 4.) A. Chao, M. Tigner, *Handbook of Accelerator Physics and Engineering* (World Scientific 1998)
- 5.) Peter Schmüser: *Basic Course on Accelerator Optics*, CERN Acc. School: 5th general acc. phys. course CERN 94-01
- 6.) Bernhard Holzer: *Lattice Design*, CERN Acc. School: Intern. Acc. phys. course, <http://cas.web.cern.ch/cas/ZEUTHEN/lectures-zeuthen.htm>
- 7.) Frank Hinterberger: *Physik der Teilchenbeschleuniger*, Springer Verlag 1997
- 9.) Mathew Sands: *The Physics of e+ e- Storage Rings*, SLAC report 121, 1970
- 10.) D. Edwards, M. Syphers : *An Introduction to the Physics of Particle Accelerators*, SSC Lab 1990