



Basics of Accelerator Science and Technology at CERN

Power supplies for Particle accelerators

Jean-Paul Burnet

- Definition
- Basic electricity
- The loads
- The circuits
- The power supply specification
- Power electronics, how does it works?
- Examples of power supplies and applications
- Energy saving
- Power supply control
- Summary

Definition

Wikipedia: A power supply is a device that supplies electric energy to an electrical load.

Power supplies are everywhere: computer, electronics, inside any modern electrical equipment (washing machine, ...), motor drives,...



Electricity provider



Power supply



Load

Definition

Where can we find power supplies in a particle accelerator?

Everywhere ! Everything is powered by electricity !


This presentation covers the **magnet power supplies** which are specific for particle accelerators :

Power supply or power converter?

US labs use magnet power supply

CERN accelerators use power converter



CERN experiments use power supply

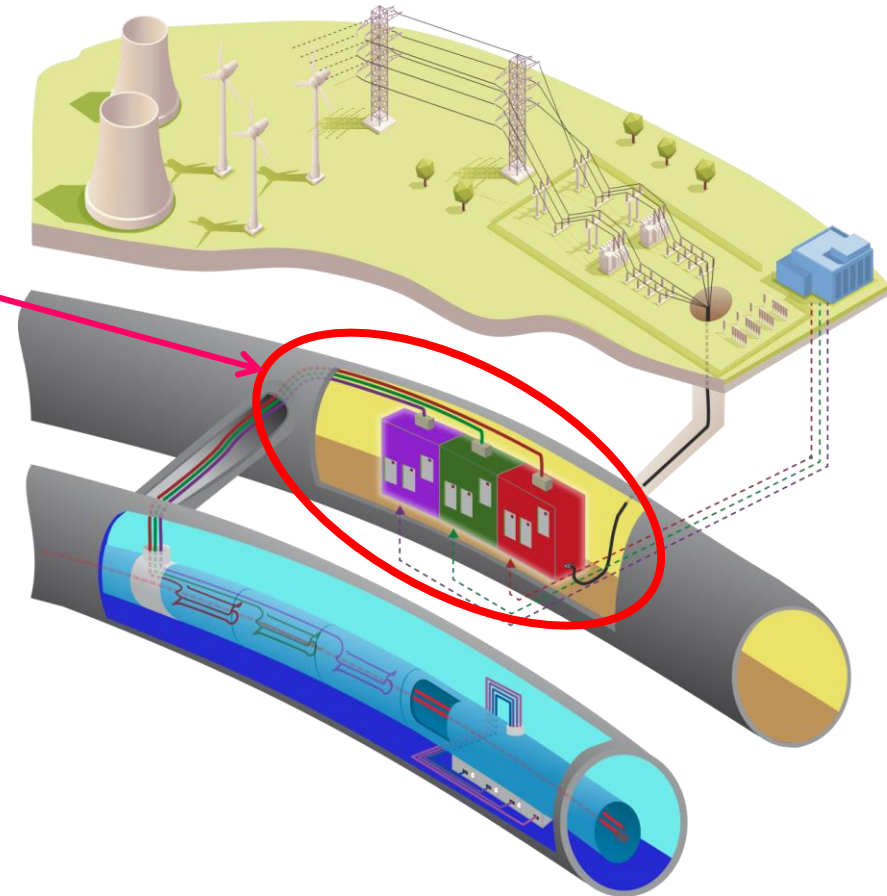

Electrical power

Electricity is mainly produced by rotating machines, generating alternative voltage.



The accelerator magnets need a DC current.

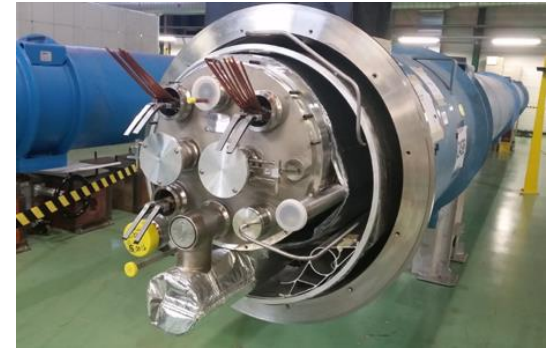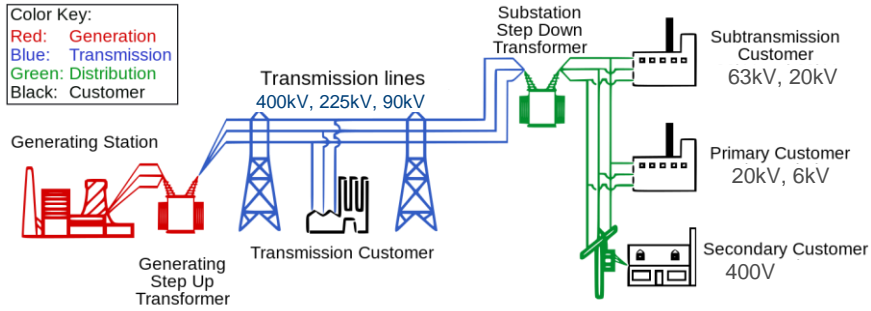



Alternative voltage



DC current

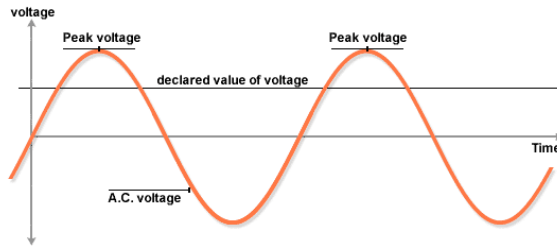

Direction of electron motion



http://content.tutorvista.com/physics_12/content/media/ac_gen.swf

Power supply functions

The tasks of a power supply are to process and control the flow of electric energy by supplying voltage and current in a form that is optimally suited for user loads.





Energy source



Control from CCC



Application

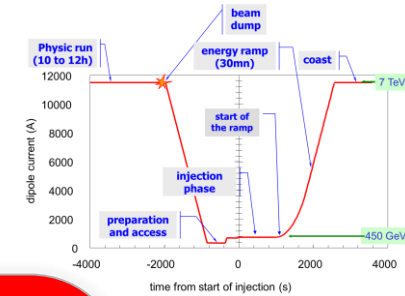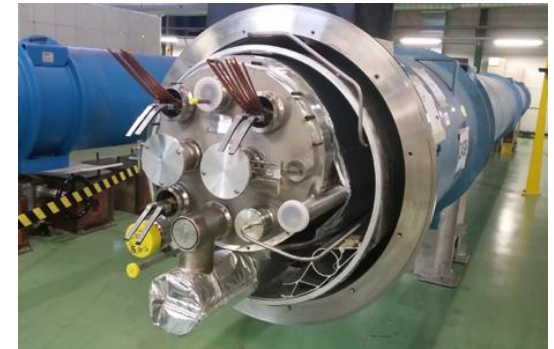

Basic electricity

An **electric current** is a flow of electric charge. In electric circuits, this charge is often carried by moving electrons in a wire.

Voltage is the difference in electric potential energy between two points per unit electric charge. The voltage between two points is equal to the work done per unit of charge against a static **electric field** to move the test charge between two points and is measured in units of volts (a joule per coulomb).

Electric Power (Watt) = Voltage (Volt) * Current (Ampere)


Energy (Joule) = Power (Watt) * time (second)

Matter:


- Conductor = electrons flow easily. Low resistance.
- Semiconductor = electrons can be made to flow under certain circumstances.
- Insulator = electrons flow with great difficulty. High resistance.

Basic electricity

Resistor:




current is proportional to voltage

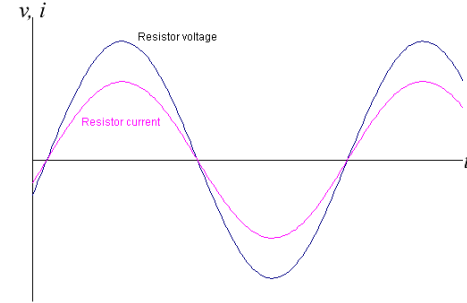


$$V(t) = R \times I(t)$$

R = resistance in ohm

Inductor:



Difficult to change the current

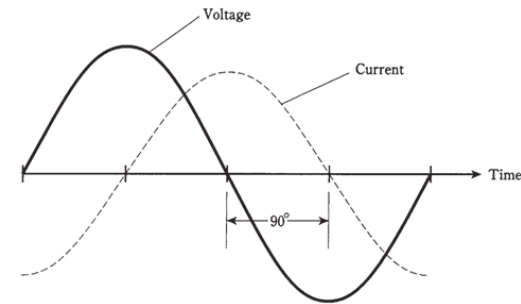


$$V(t) = L \times \frac{dI(t)}{dt}$$

L = inductance in Henry


E_L = Stored energy

$$E_L = \frac{1}{2} \times L \times I^2$$

Capacitor



Difficult to change the voltage

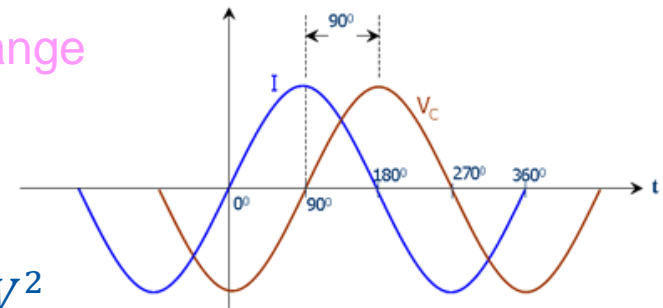

$$I(t) = C \times \frac{dV(t)}{dt}$$


C = capacitance in Farad

E_C = Stored energy

$$E_C = \frac{1}{2} \times C \times V^2$$

What are the main loads?



The main loads of a particle accelerator are the magnets and the radiofrequency systems. It is also the devices which control the beams.

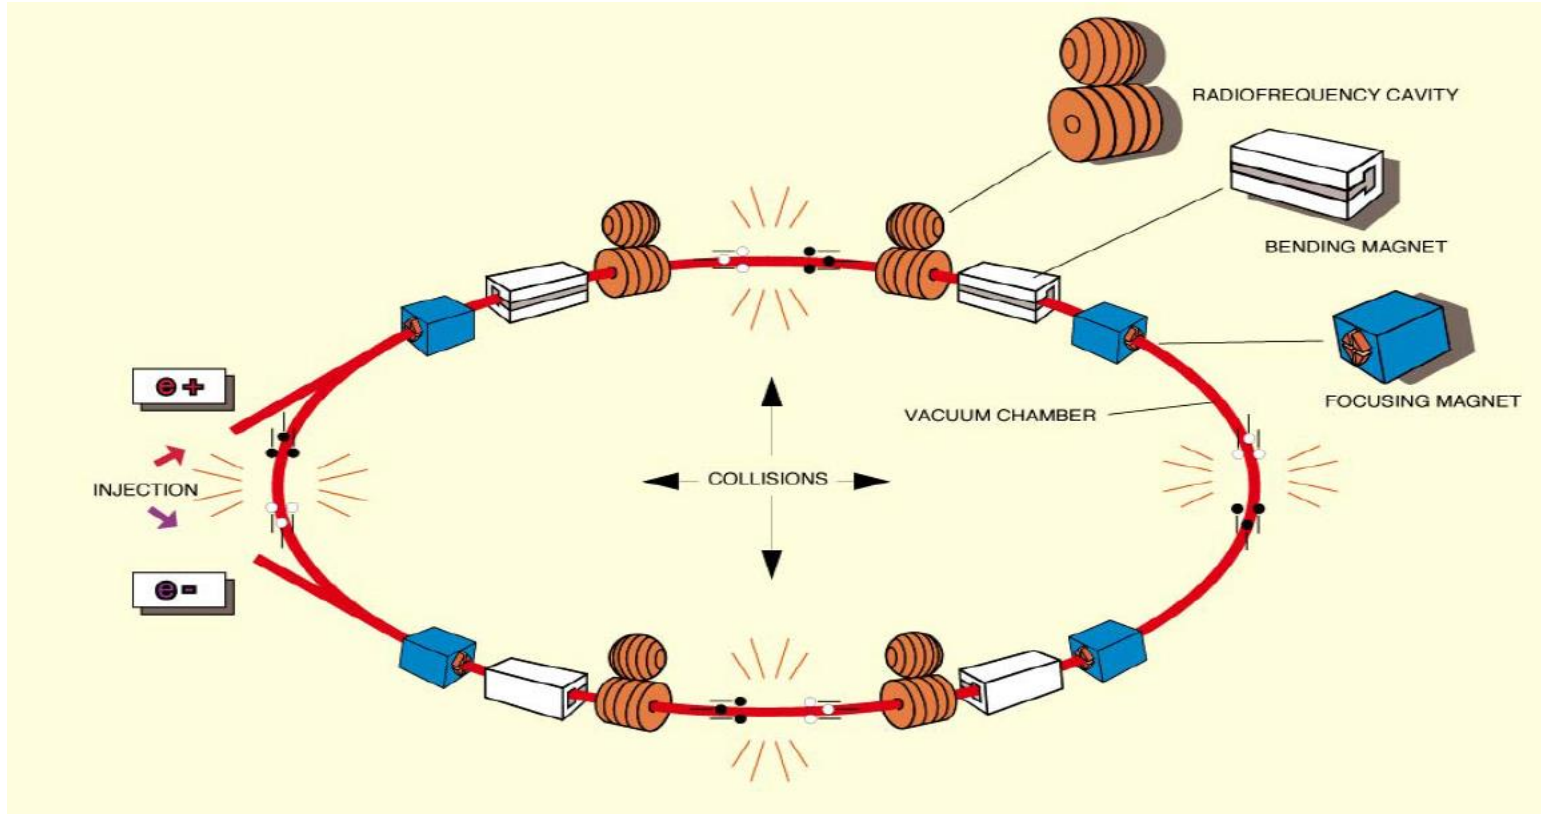

Are the magnet power supplies critical?

In a synchrotron, the beam energy is proportional to the magnetic field of the dipole magnets.

The magnet field is generated by the current circulating in the magnet coils.

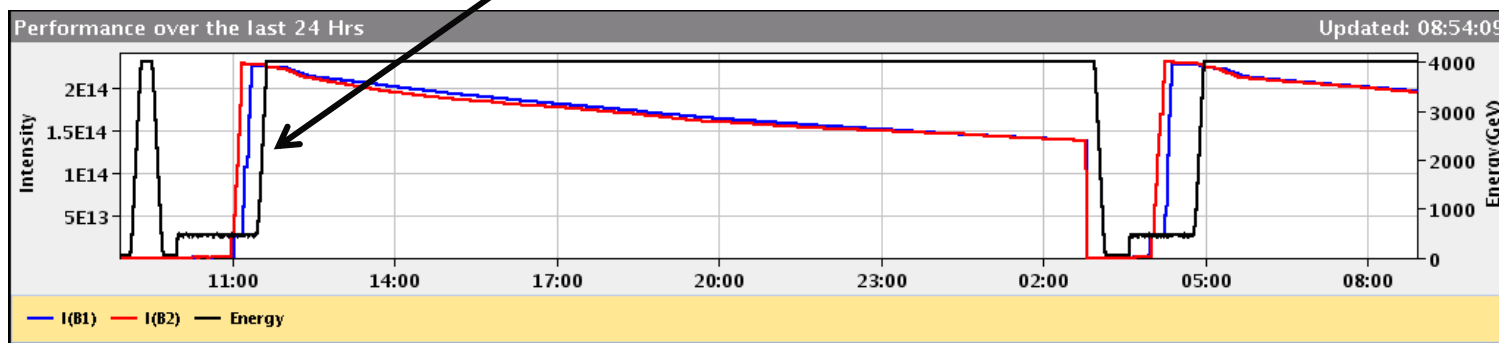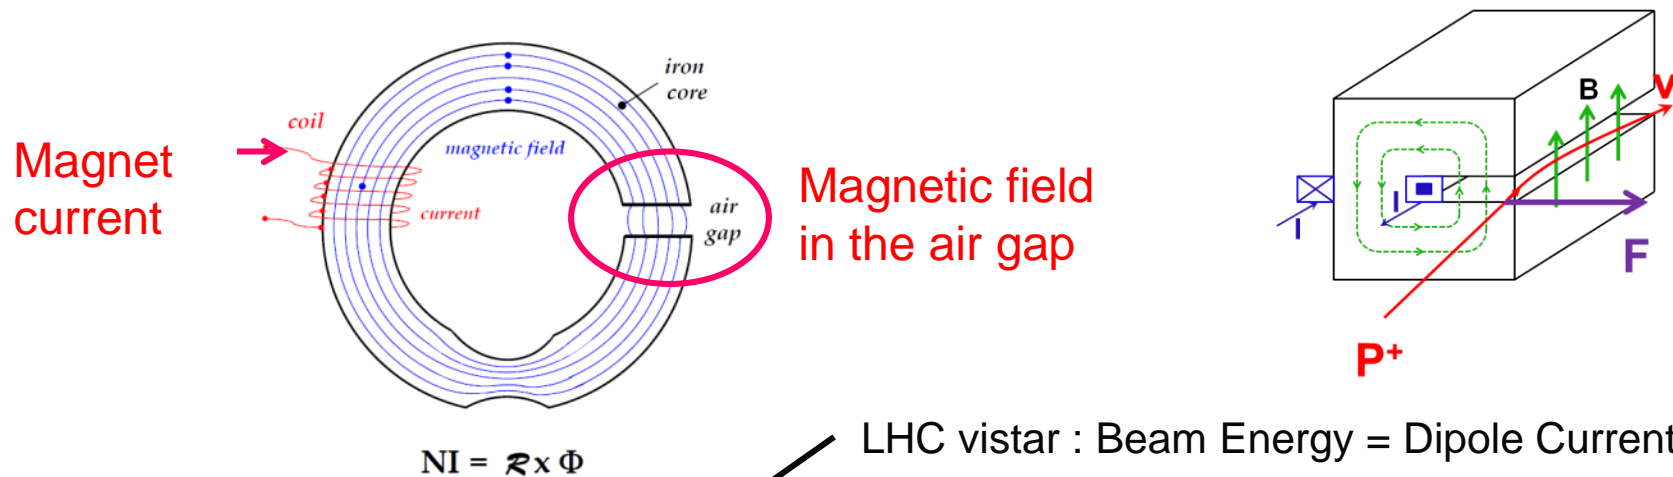


The magnet power supplies control the beam optics.

First step, identify the load



Before any design of power supplies, the first step is to write a **functional specification** which describes the powering of the accelerator and the performance required by the power supplies.

Many technical points have to be clarified to define all the power supply parameters.

What do we need for a new particle accelerator like ELENA?

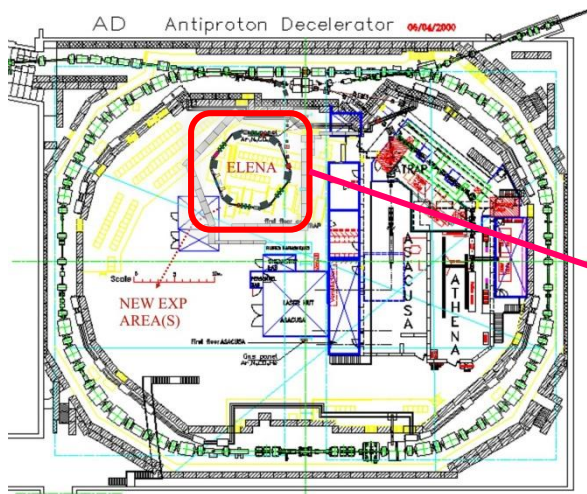


ELENA: Extra Low Energy Antiproton Ring

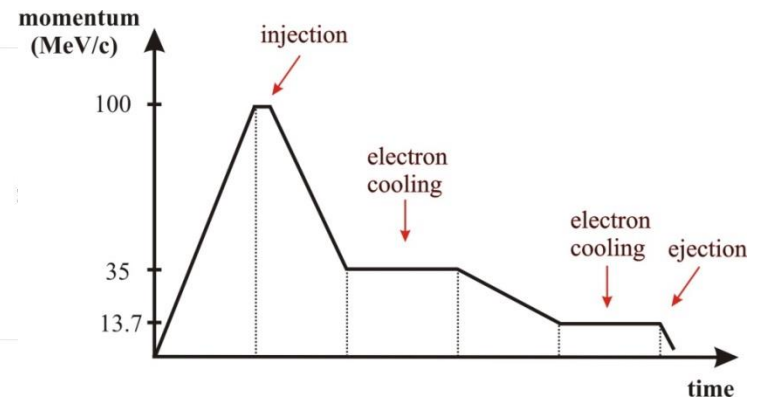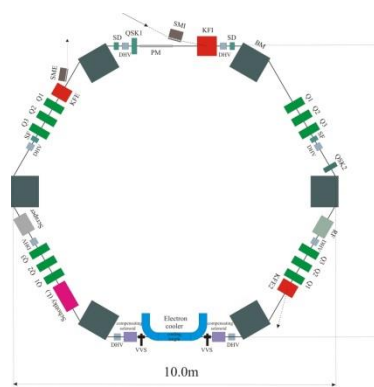


The loads: magnets

The magnet families are :


Dipole: Bend the beam

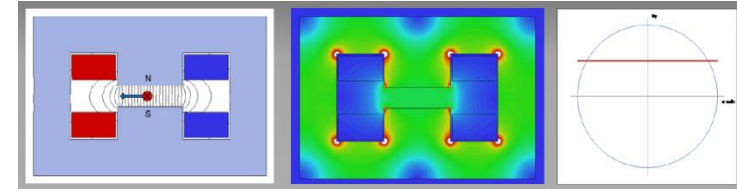


Quadrupole: focus the beam

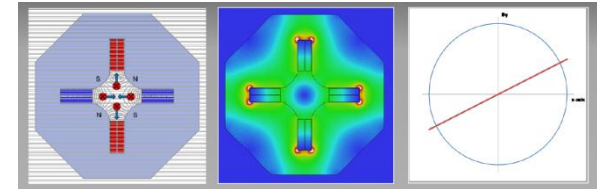


Sextupole: correct chromaticity

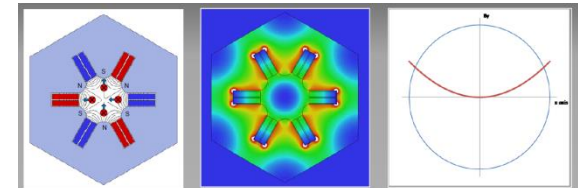

Octupole: Landau damping

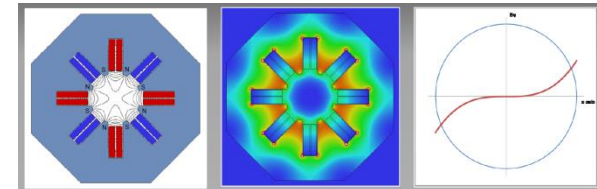

Skew: coupling horizontal & vertical betatron oscillations





<http://cas.web.cern.ch/CAS/Belgium-2009/Lectures/Bruges-lectures.htm>



The loads, special magnets

For beam transfer, special magnets are needed. The families are :

Electrostatic septum

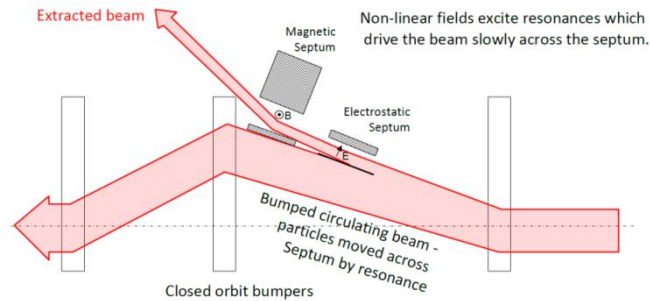


Septum magnet

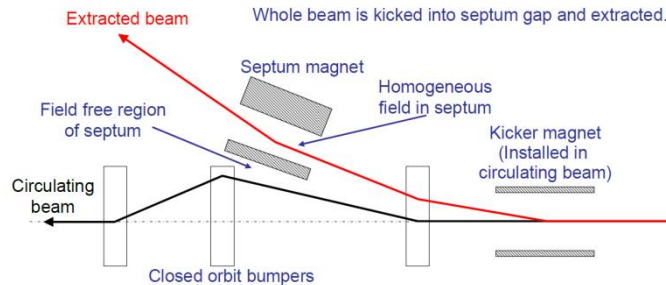

Kicker Magnet

Rise time # 10ns-1μs



Kicker generators are very special and generally handled by kicker people.

<http://cas.web.cern.ch/cas/IET2017/IET-advert.html>

The loads, RF amplifiers

For the radio frequency system, the RF power comes through RF power amplifiers.

The families of RF power amplifiers are :

Solid state amplifier, Low power, 100V, 1–100kW

Will be present with the new SPS RF

Tetrode, Medium power, 10kV, 100kW



Present in PS, SPS

IOT, Medium power, 20-50kV, 10-100kW

Present in SPS

Klystron, High power RF, 50-150kV, 1-150MW

Present in LINAC4, LHC



<http://cas.web.cern.ch/CAS/Denmark-2010/Lectures/ebeltoft-lectures.html>

Circuit layout, how many power supplies?

The magnets can be powered individually or in series.

Individually:

- increase flexibility of beam optics
- B-field can be different depending of the cycles (hysteresis)
- Global cost is higher, more DC cables, more power supplies
- Needed when the voltage goes too high (>10kV magnet class)
- Needed when the energy stored is too big (superconducting magnets)

Series connected:

- B-field identical
- Rigid optic
- Need trim power supplies to act locally
- Global cost reduced, less DC cables, less power supplies but bigger in power rating


Magnet in series

To get the same B-field in a family of magnets as requested by accelerator physicists, the classical solution is to put all the magnets in series.

Generally done with dipole and quadrupole.

Example of SPS quadrupole



Lead to high power system for dipole and quadrupole, up to 120MW !!!

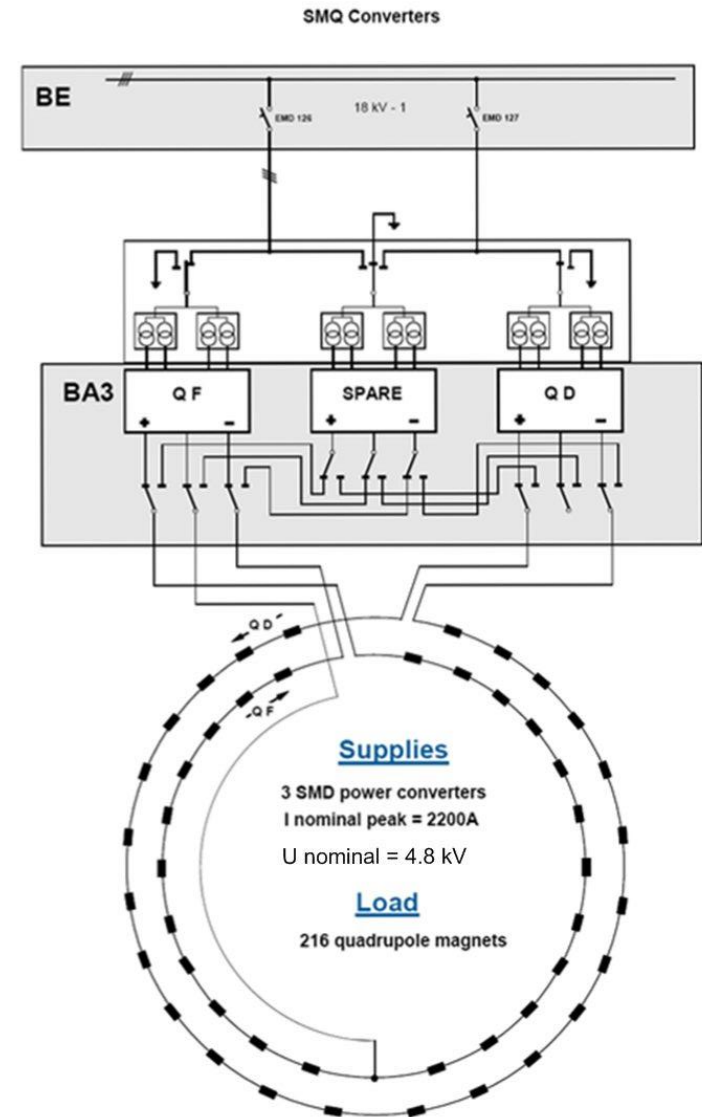

Individual powered magnet

For synchrotron source lights, the quadrupole are generally individually powered to adjust the beam size (beta function) for each users (corresponding to a Fodo cell).

Example, SESAME cell.

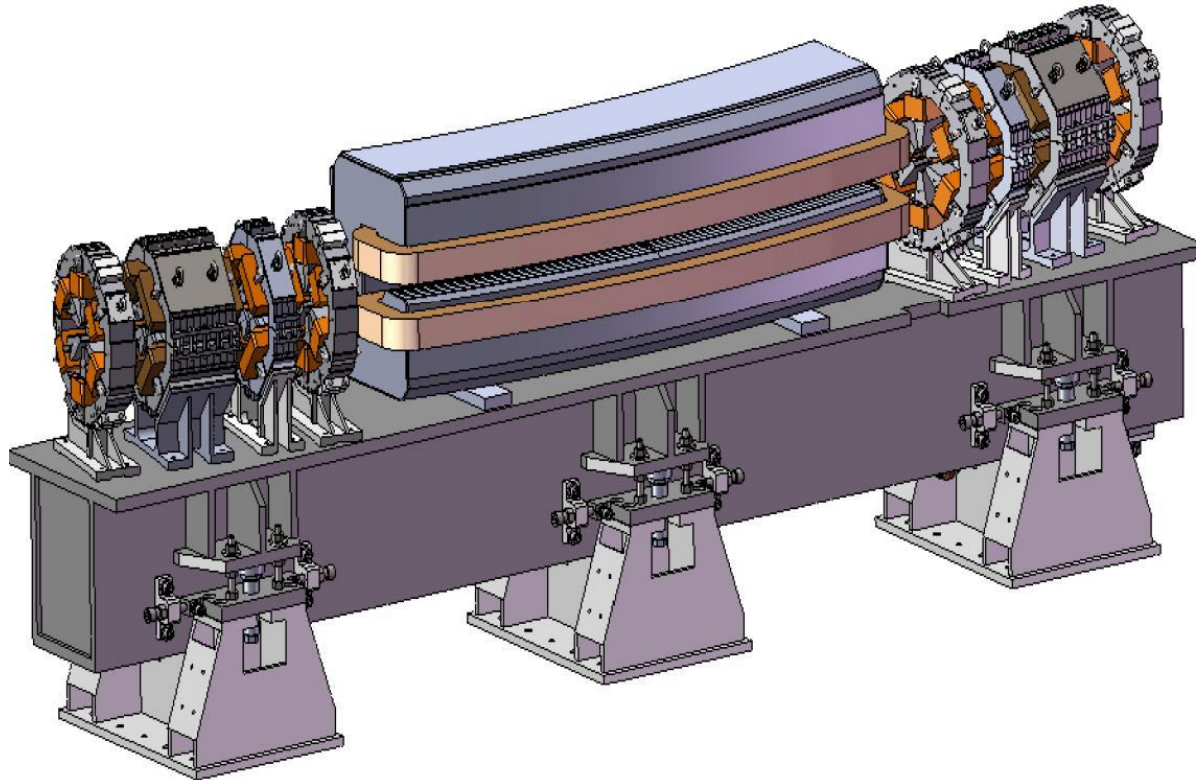

Splitting the magnet circuit


When the power is becoming too high, the circuits have to be split.

First time with LHC in 8 sectors. All magnet families cut in 8.



Tracking between sector !

1.2 GJ stored energy in dipole circuit per sector!

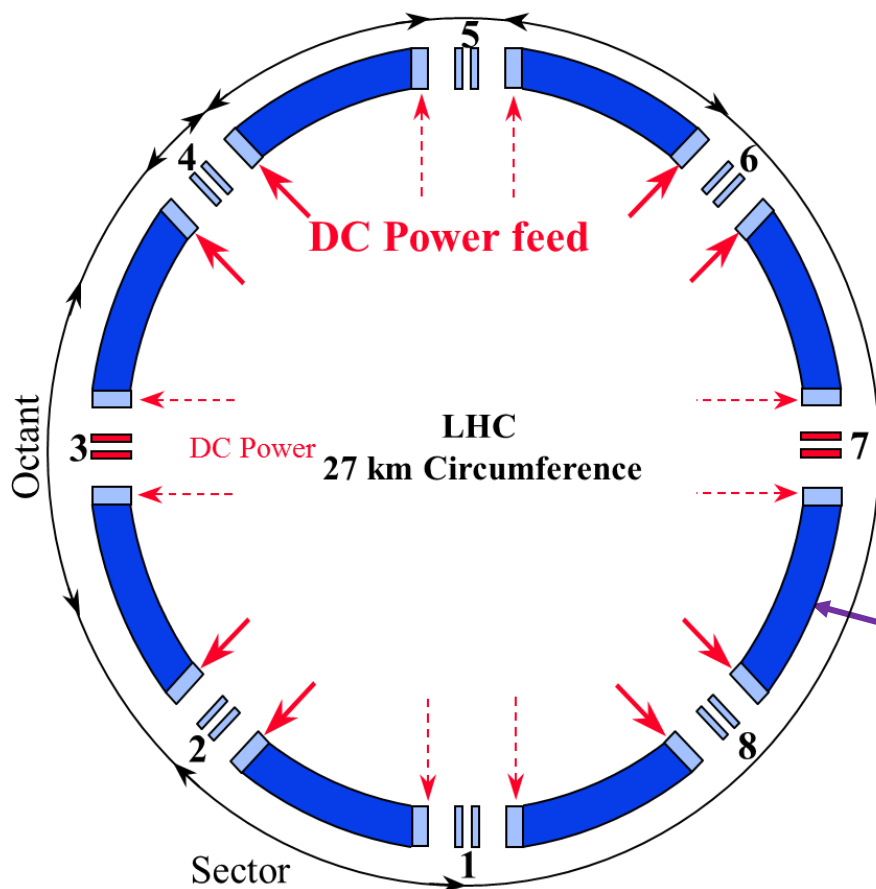



Powering Sector:

154 dipole magnets
total length of 2.9 km


Power supply specification

The way that the magnets will be operated has to be defined from the beginning.

- Type of control: Current control
- Maximum – minimum current
- Complete cycle
 - Injection current
 - Maximum di/dt , ramp-up
 - Maximum flat top current
 - Maximum di/dt , ramp-down
 - Return current
 - Cycle time
- Degauss cycle / pre-cycle
- Standby mode

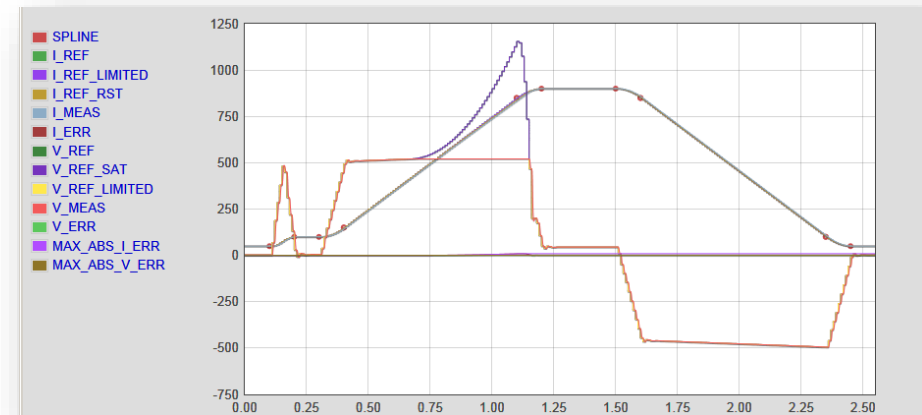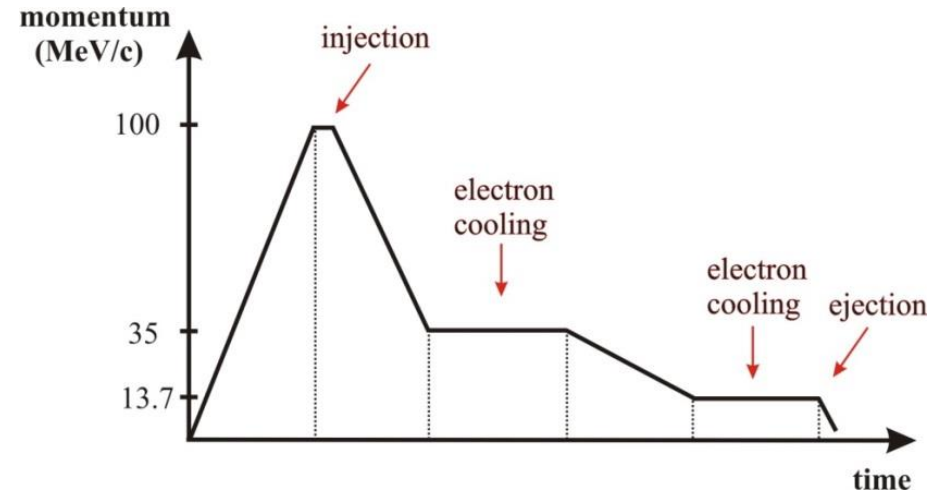



Power supply types versus magnet cycles

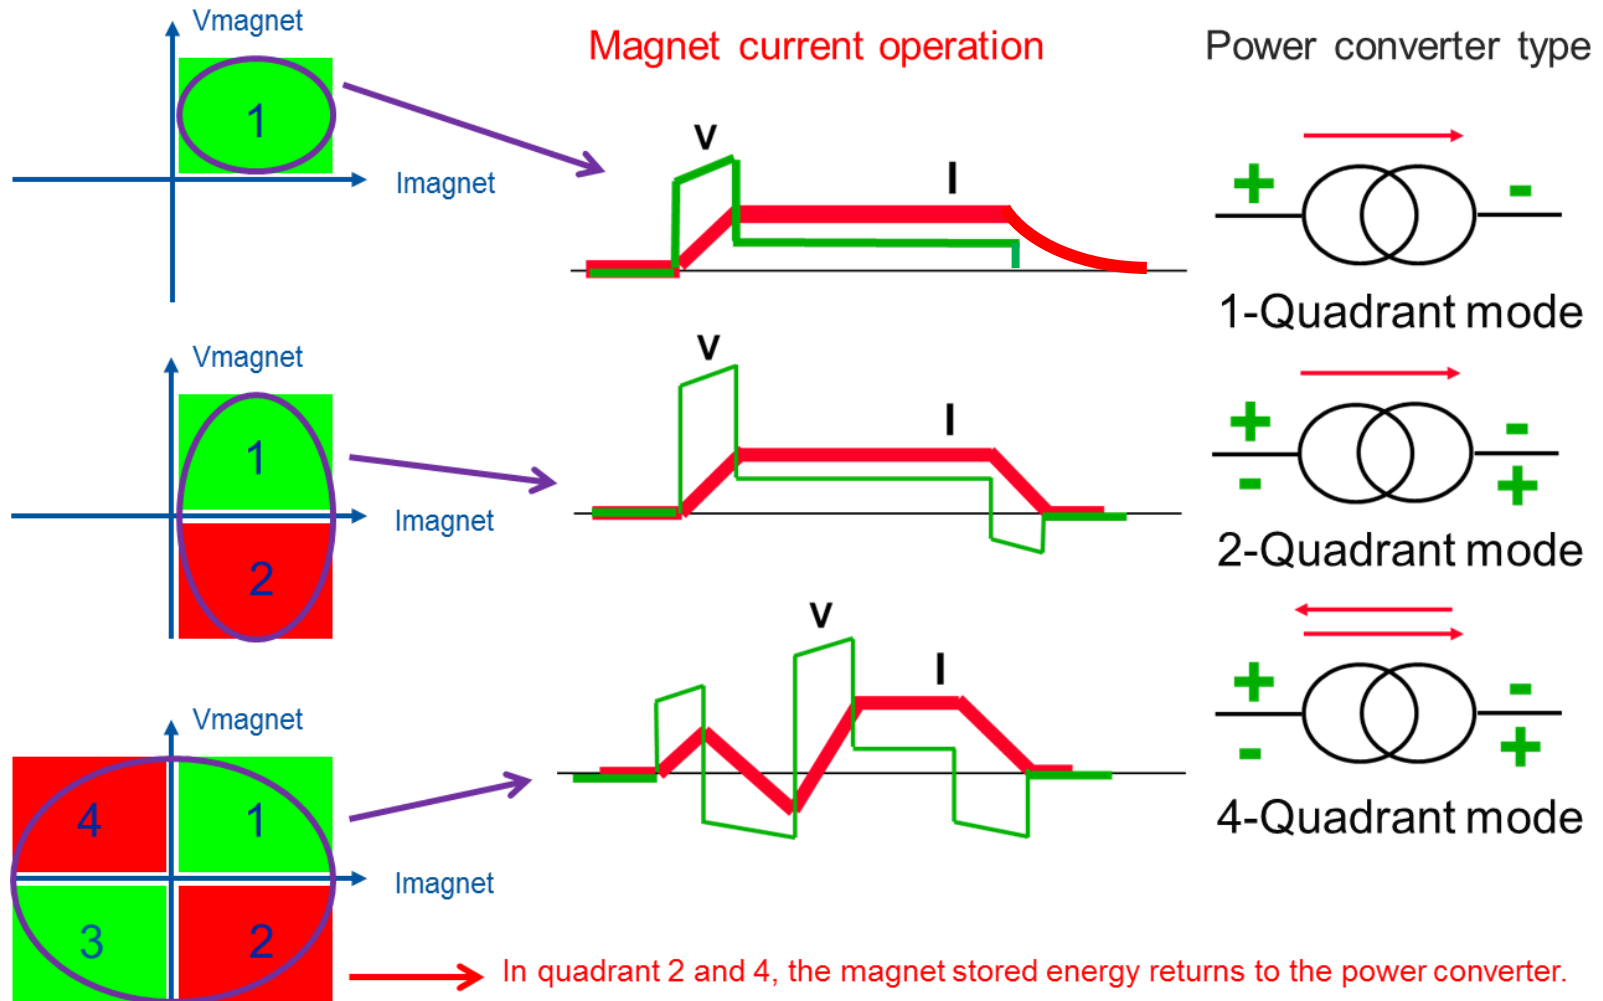

Origin of power electronics

Power electronics is the application of solid-state electronics for the control and conversion of electric power.


Power electronics started with the development of mercury arc rectifier. Invented by Peter Cooper Hewitt in 1902, the mercury arc rectifier was used to convert alternating current (AC) into direct current (DC).

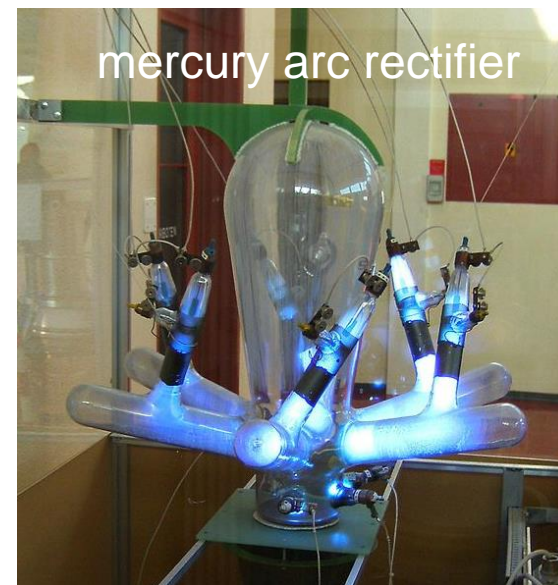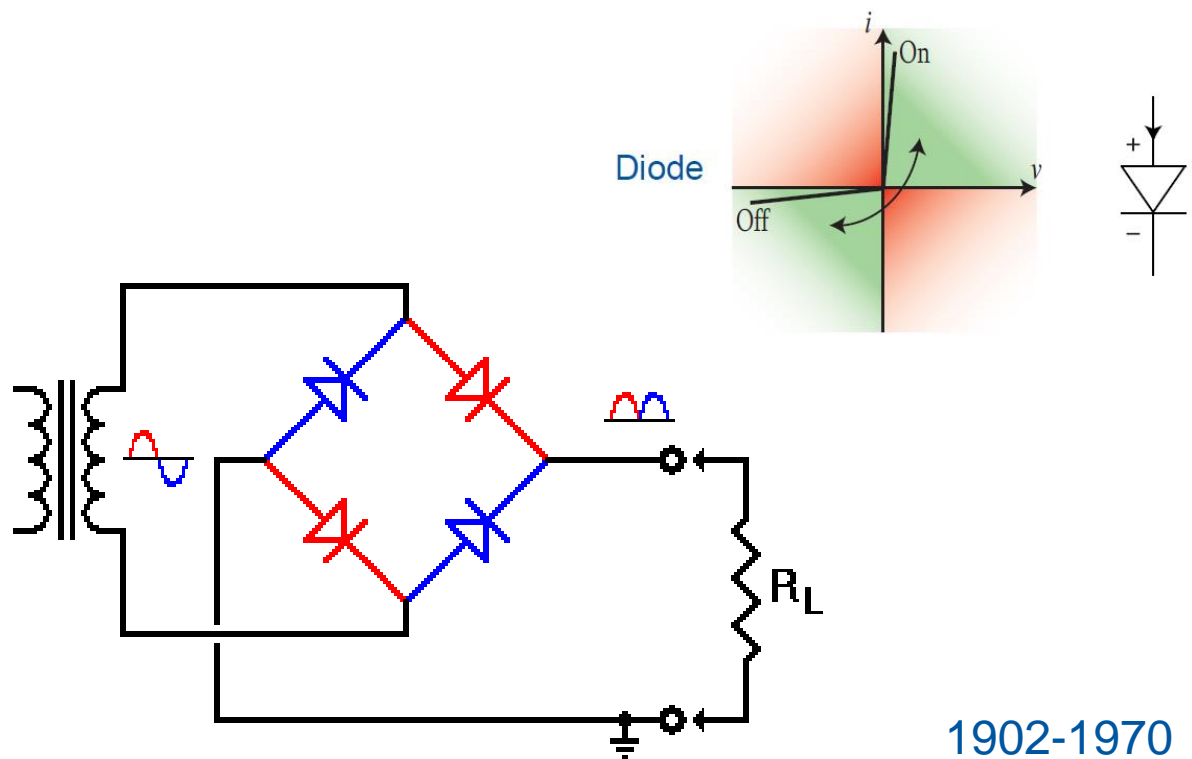


1902-1970

Middle age power electronics

Vacuum tube or transistor used as a variable resistor (linear regulator).



Transistor (T) operated in its active region

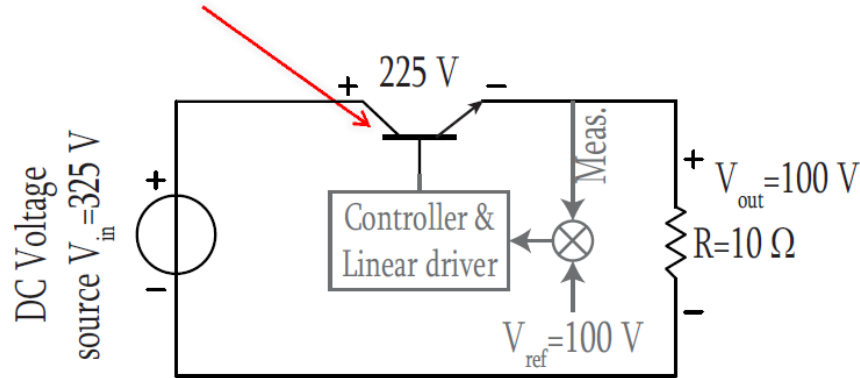

• Analysis:

$$P_{in} = 325 \text{ V} \times 10 \text{ A} = 3.25 \text{ kW}$$

$$P_{out} = 100 \text{ V} \times 10 \text{ A} = 1 \text{ kW}$$

$$P_T = P_{in} - P_{out} = 225 \text{ V} \times 10 \text{ A} = 2.25 \text{ kW}$$

Efficiency:

$$\eta = \frac{P_{out}}{P_{in}} = \frac{1}{3.25} = 0.3 \longrightarrow \mathbf{30\%}$$





Vacuum tube or valve
1907-1970



transistor
1947-1980

Hipie power electronics


Thyristor (1956): once it has been switched on by the gate terminal, the device remains latched in the on-state (*i.e.* does not need a continuous supply of gate current to remain in the on state), providing the anode current has exceeded the latching current (I_L). As long as the anode remains positively biased, it cannot be switched off until the anode current falls below the holding current (I_H).

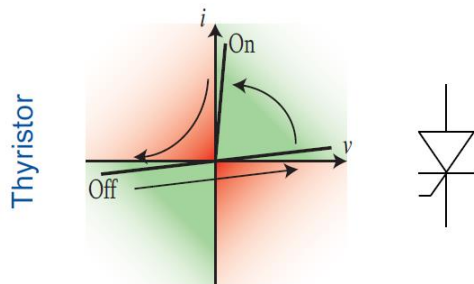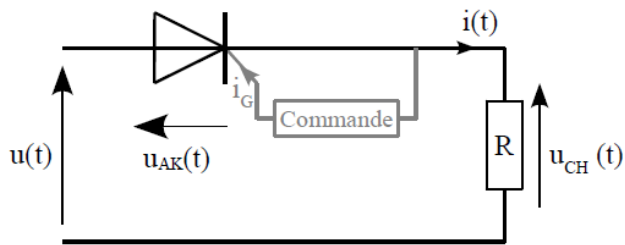

Thyristor Blocked

Thyristor turn ON


Thyristor turn OFF
At zero current

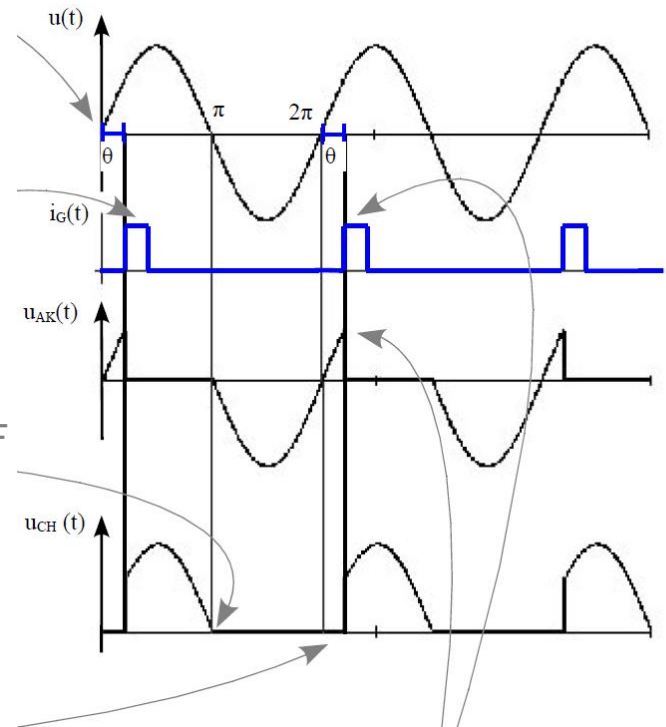

Thyristor
1957-2000


Turn ON possible when positive voltage

Modern power electronics





Use semiconductors as switches

ON – OFF states only



Switch-mode power supply

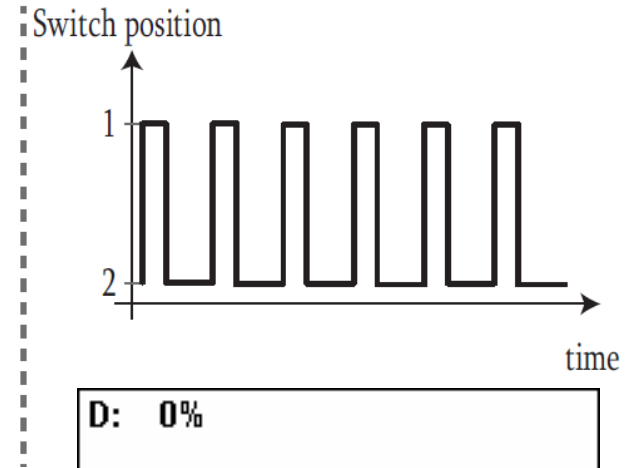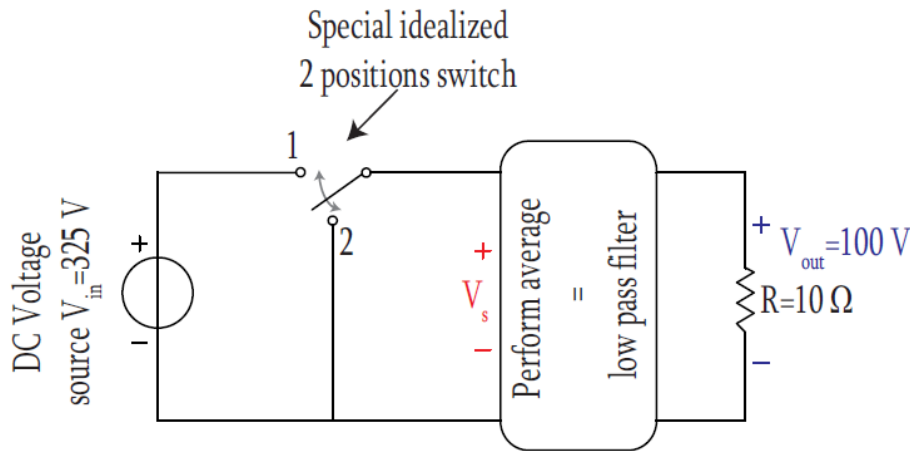

A square voltage waveform is generated by the switch.



The energy transferred to the load is controlled by modulating the duty cycle D .

D is the fraction of one period in which the switch is ON.

Transistor, MOSFET, IGBT
1980 until now

Basic principle

Resistive load

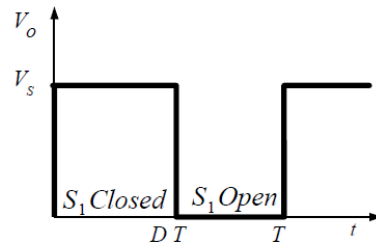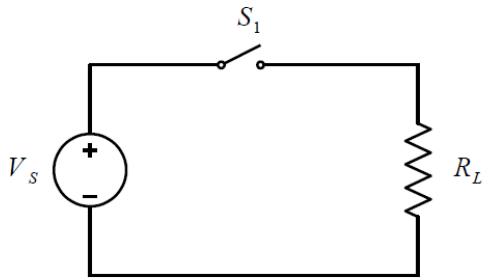



$$\overline{V_{RL}} = \frac{DT}{T} \times V_s$$

$$\overline{V_{RL}} = D \times V_s$$

$$\frac{1}{T} = \text{switching frequency}$$

$D = \text{Duty cycle}$

Inductive load

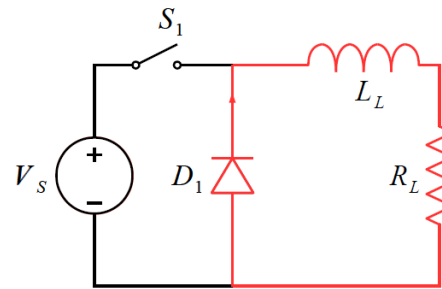


$$\overline{I_{RL}} = \frac{DT}{T} \times \frac{V_s}{R_L}$$

$$\overline{I_{RL}} = D \times \frac{V_s}{R_L}$$

Simple buck converter


The basic principle is to command a switch to control the energy transfer to a load.

Example of a BUCK converter:

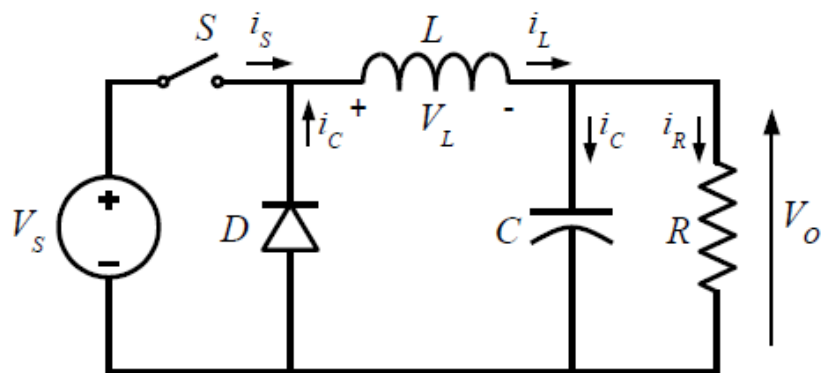

$$\bar{V}_o = \frac{DT}{T} \times V_s$$


$$\bar{V}_o = D \times V_s$$

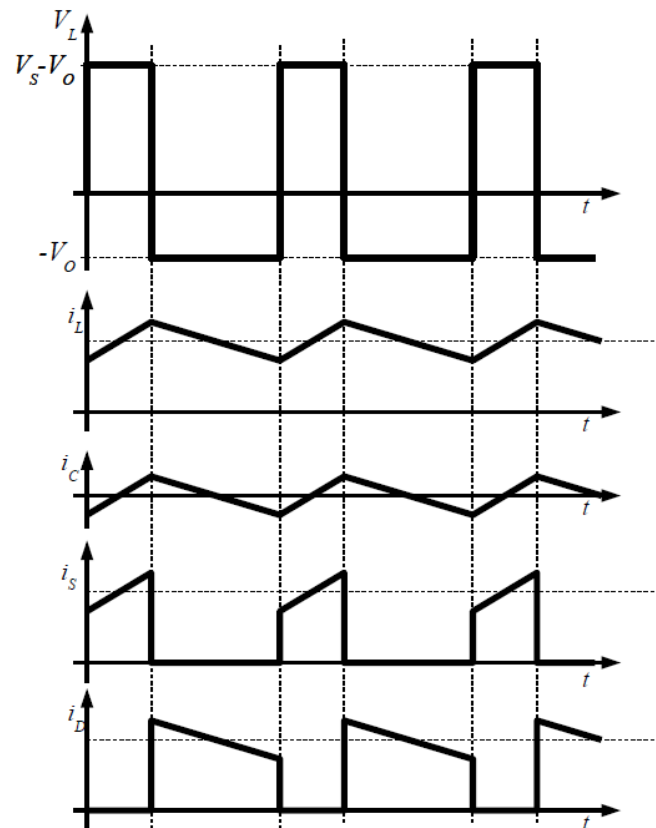


The voltage applied to the load can be changed by playing with the duty cycle.

Topologies


Many topologies exist to build a switch-mode power supply and new topologies appear every years!

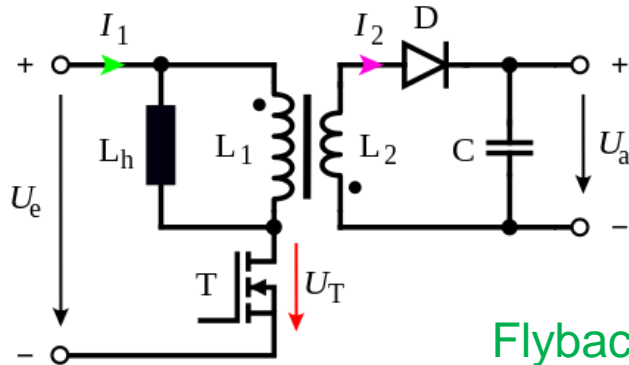


Flyback

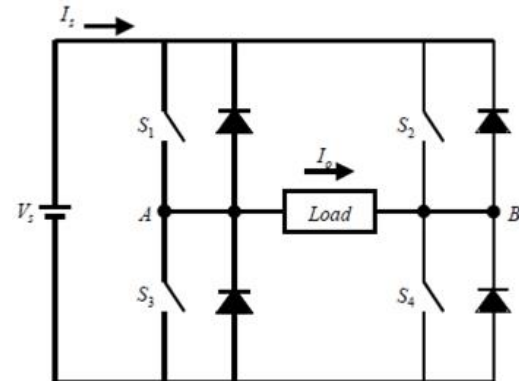

Full bridge

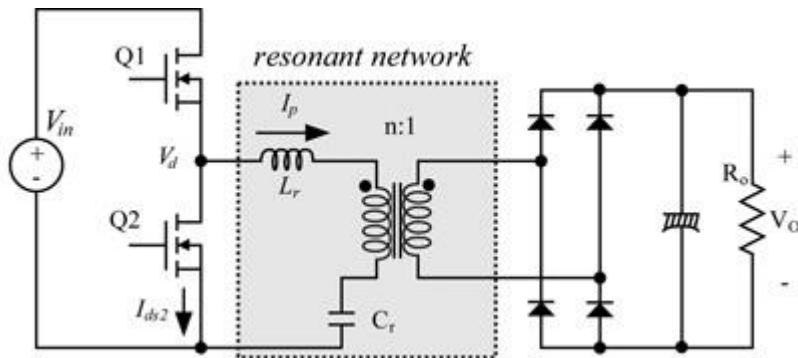

LLC resonant

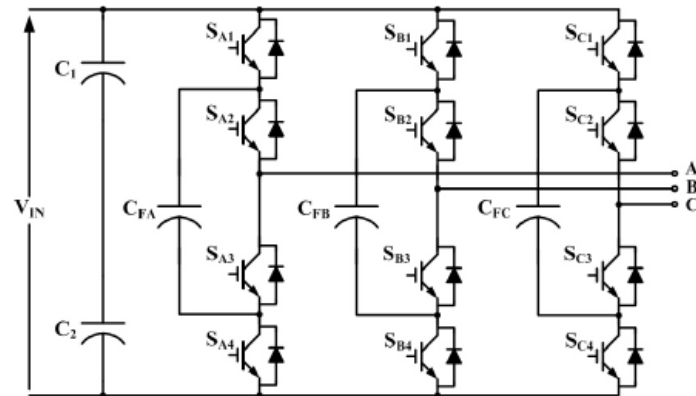


Multilevel

Switching devices

Nowadays, the main power semiconductors are:

- Diode
- MOSFET
- IGBT
- Thyristor

The most popular is the IGBT

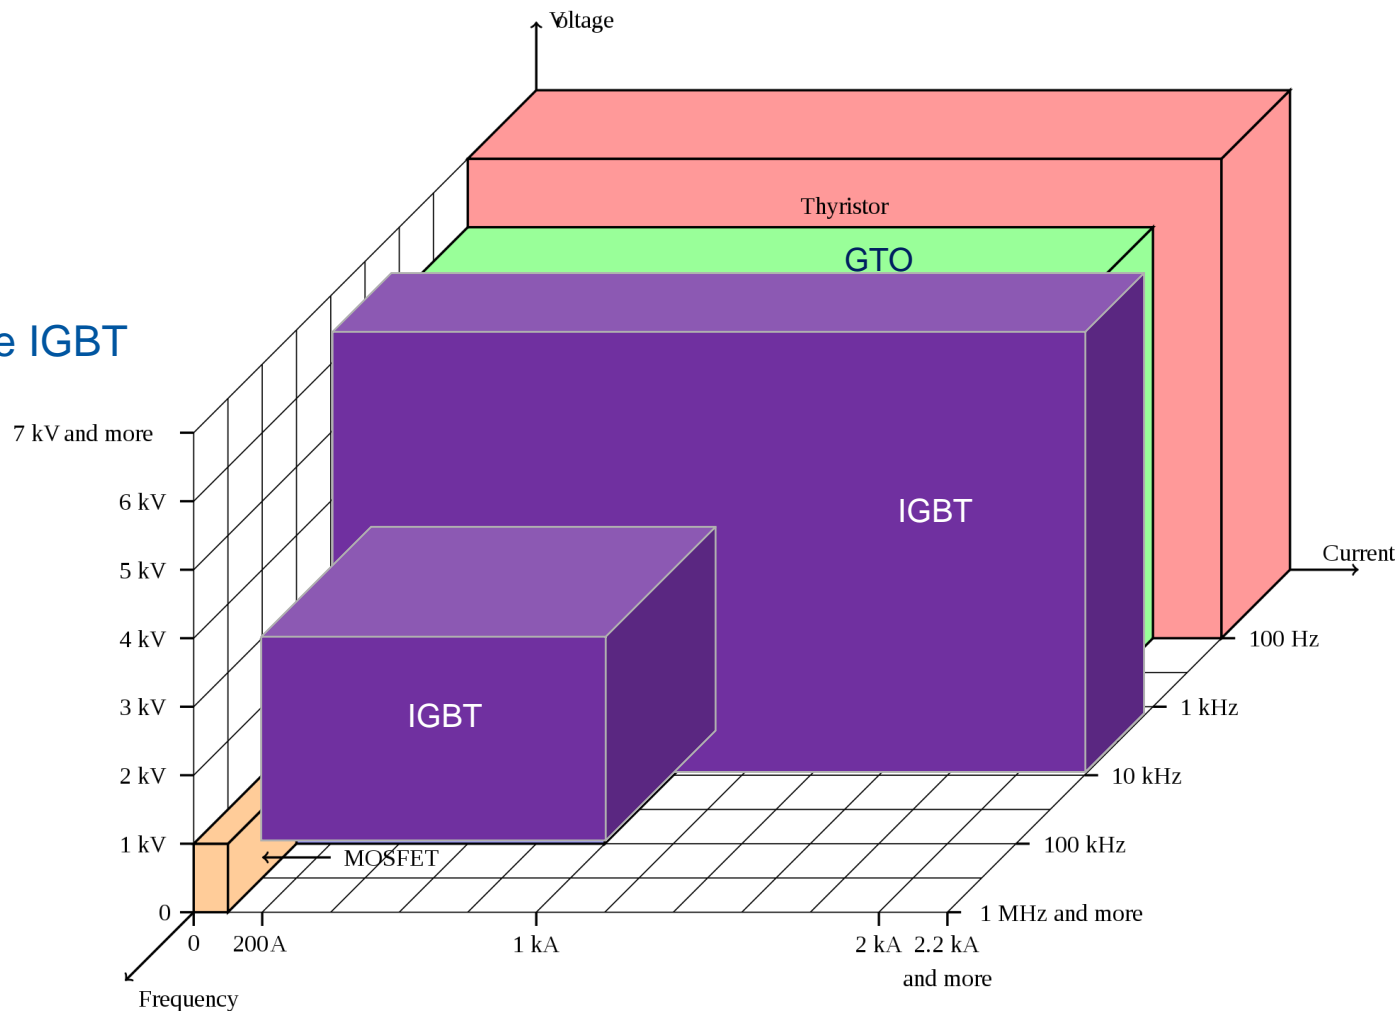

IGBT, the most popular device



What is an IGBT ?

The IGBT combines the simple gate-drive characteristics of the MOSFETs with the high-current and low-saturation-voltage capability of bipolar transistors.

The main different with thyristor is the ability to control its turn ON and turn OFF.

Many topologies can be built using IGBT.

Largely produced since 1990.



200A



1kA


3kA




IGBT

Real IGBT turn-on and turn-off:

Very fast di/dt , dv/dt => generate electrical noise
Electromagnetic compatibility (EMC) is challenging!

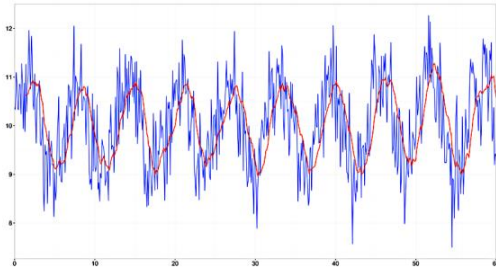

Switching losses => thermal limitation

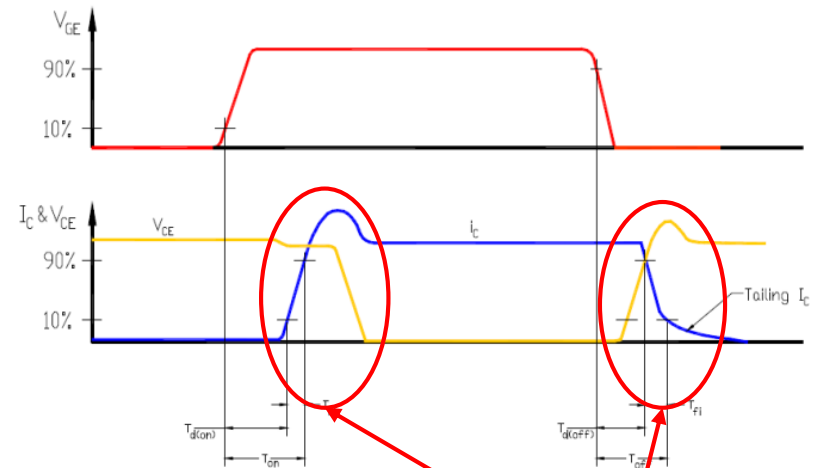

Switching losses

The switching frequency depends on:


- The turn-ON and turn-OFF time of the switch
- The maximum losses dissipated by the switch

Typical switching frequency depending on the power rating:


| | |
|-------------|--------|
| 1kW range | 100kHz |
| 100kW range | 10kHz |
| 1MW range | 1kHz |

IGBT

IGBT dies

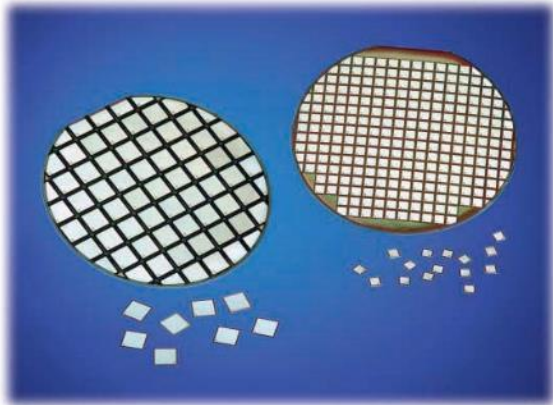


Inside a Module

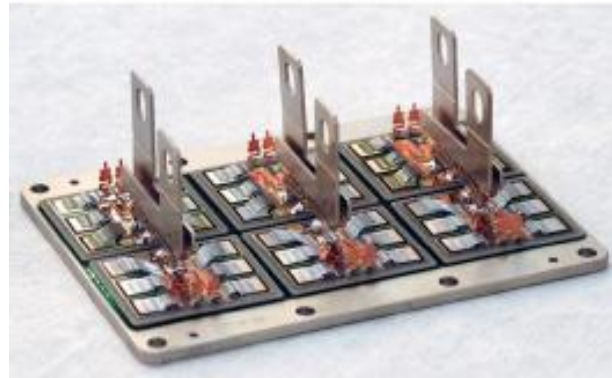

IGBT dies exist only from 25A to 150A for 1.2kV and 1.7kV.

IGBT have good thermal and electrical coefficients which also to place them in parallel.

IGBT modules have many dies in parallel to increase their current rating.

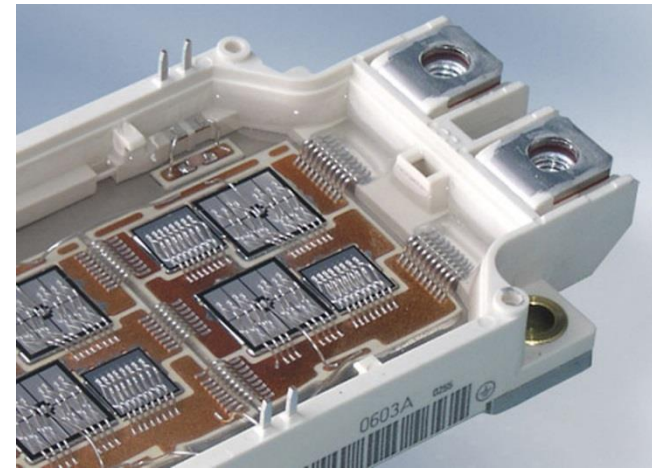

Topologies based on IGBT



The magnets need DC current.

The magnet power supplies are always AC/DC.

The topologies are build with many stages of conversion.




The magnets need also a galvanic isolation from the mains.

cases with 50Hz transformer

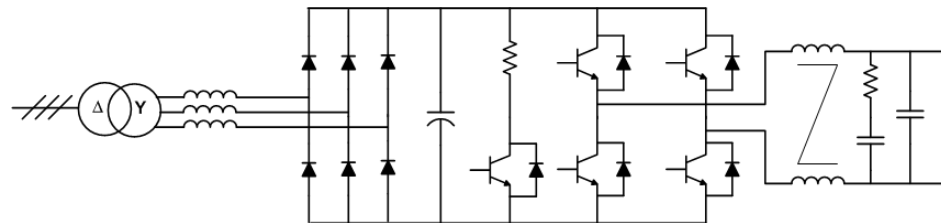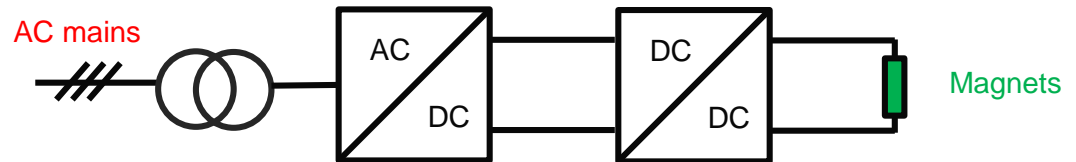

Switch-mode power supply

Example: PS converter: PR.WFNI, $\pm 250\text{A}/\pm 600\text{V}$

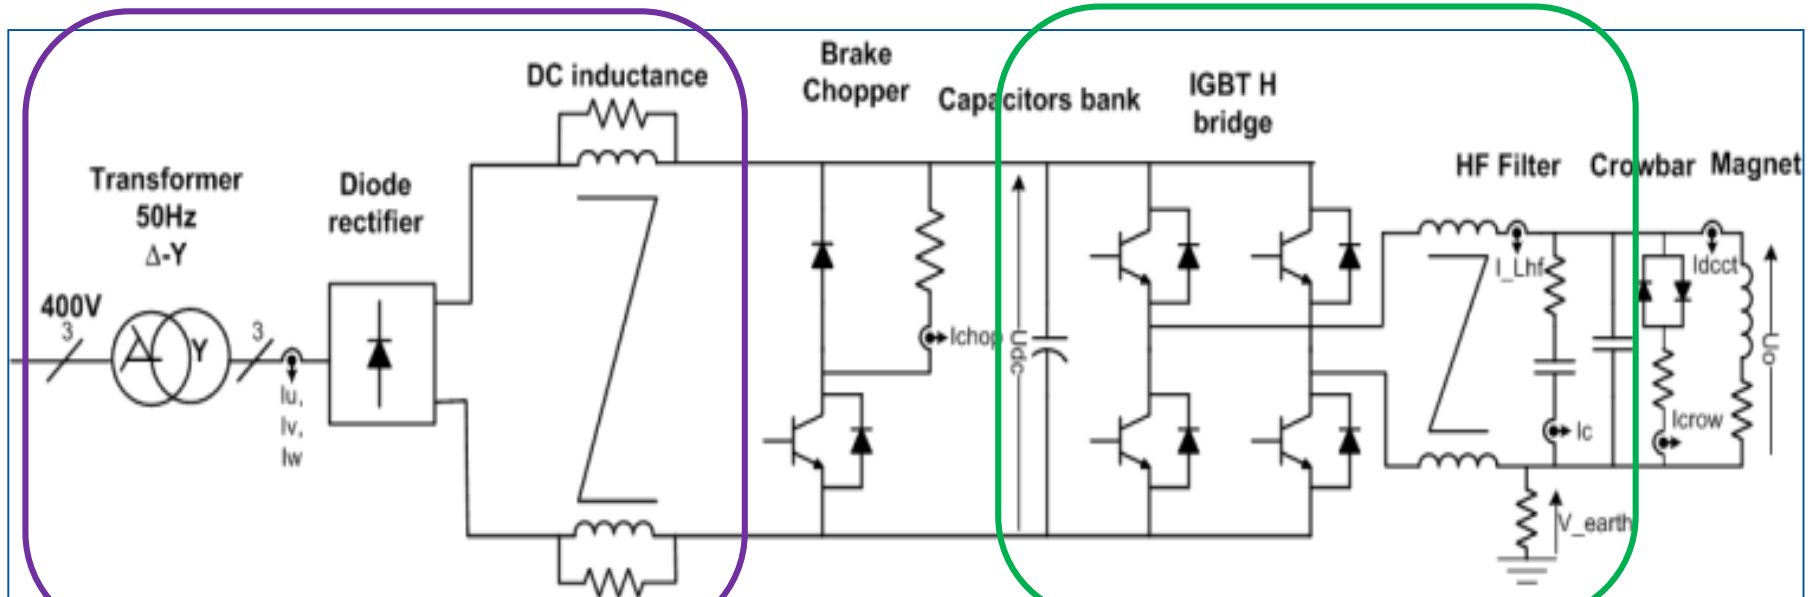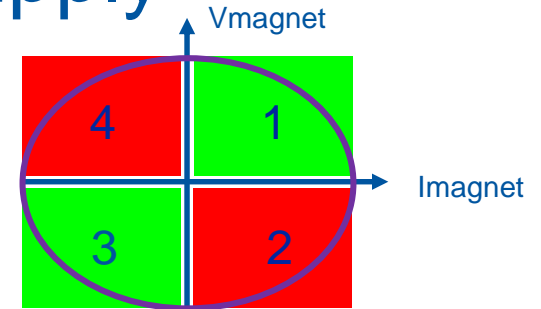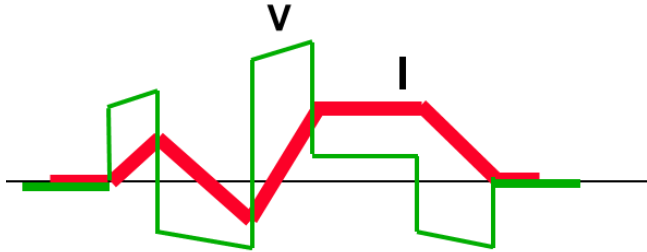

50Hz AC/DC stage



6kHz DC/DC stage



Transformer technologies



Two technologies are used for power transformers:
laminated magnetic core (like magnet):

- 50Hz technology
- High field (1.8T)
- Limitation due to eddy current
- Low power density
- High power range

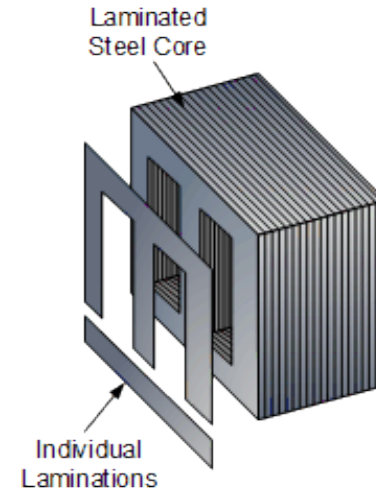



Ferrite core (like kicker):

- kHz technology
- Low field (0.3T)
- Nonconductive magnetic material, very low eddy current
- High power density
- Low power range (<100kW)

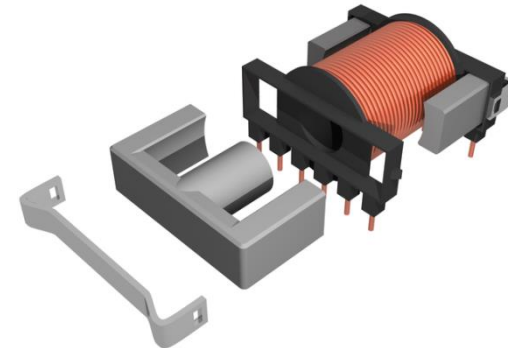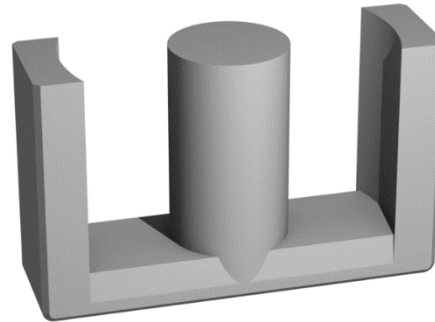


Topologies with HF transformer

In this case, it is multi-stages converter with high-frequency inverters


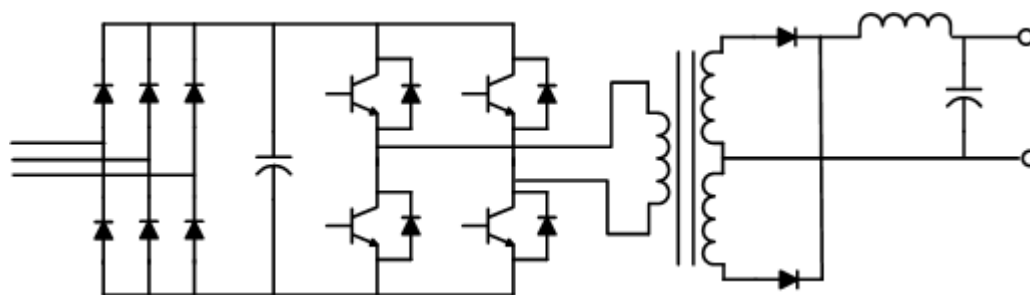
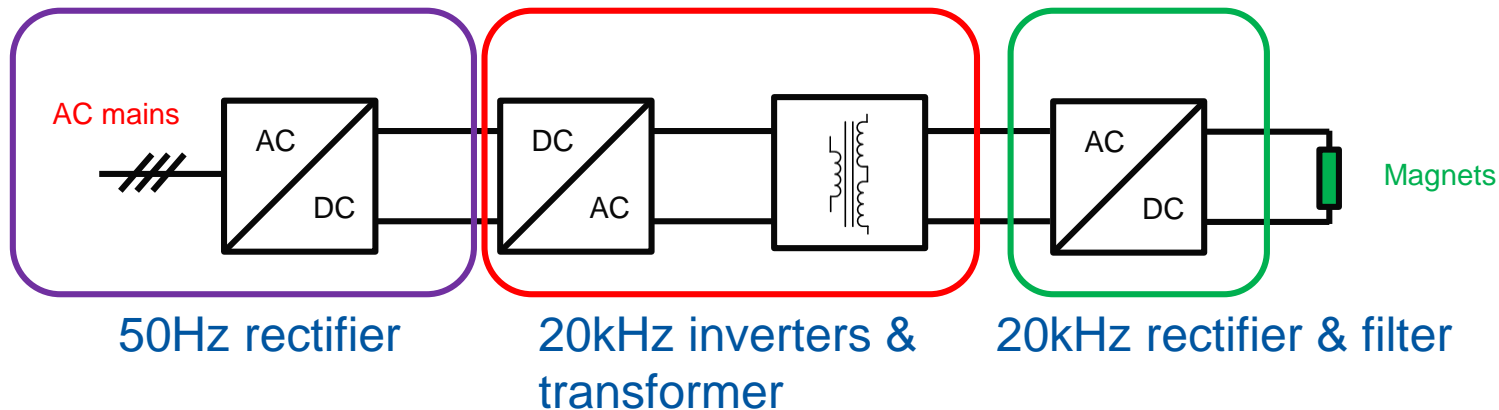


20kHz transformer


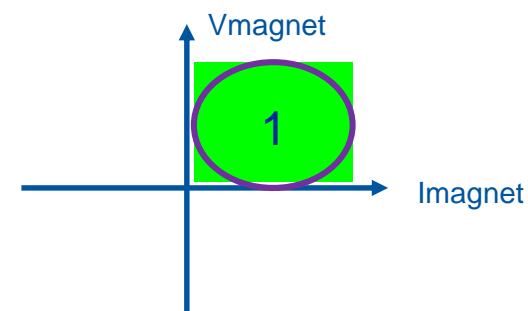


Switch-mode power supply with HF inverter

Example: LHC orbit corrector, $\pm 120\text{A}/\pm 10\text{V}$

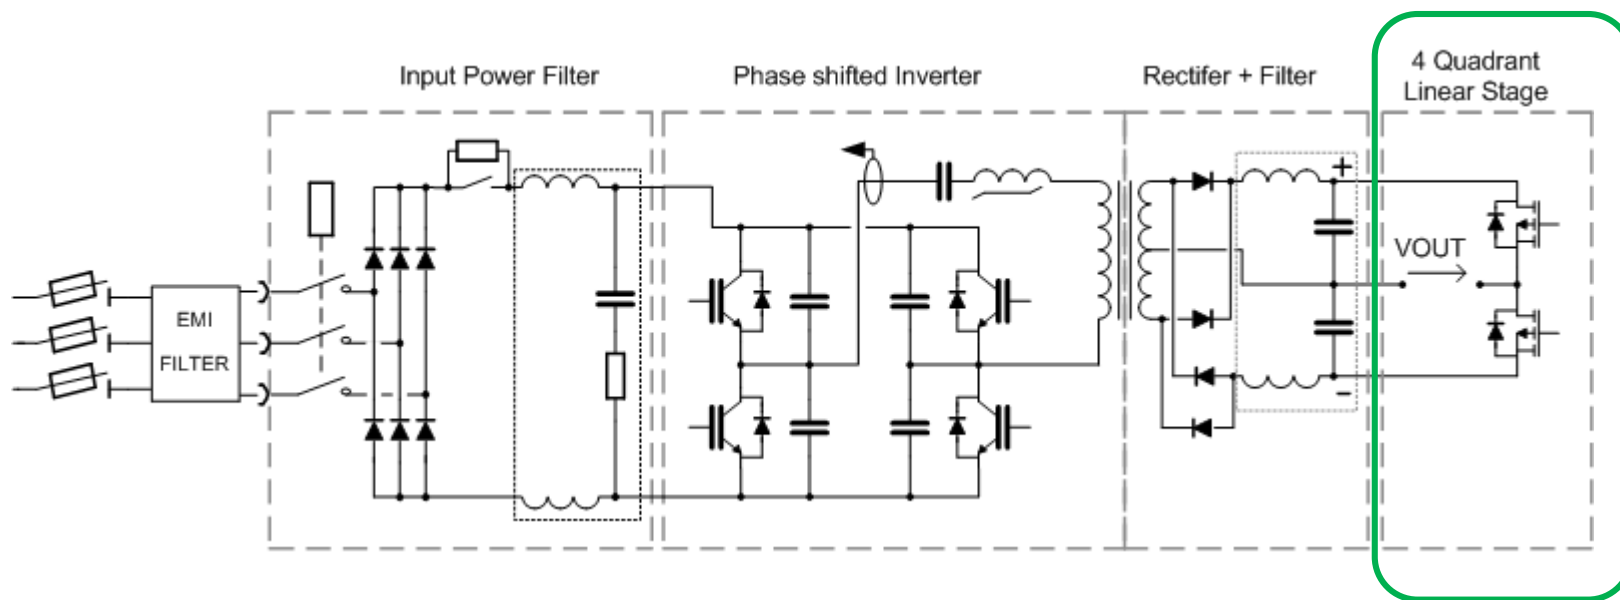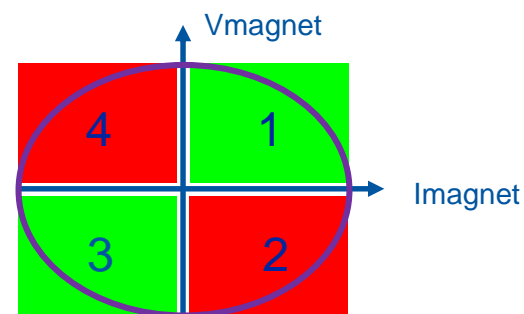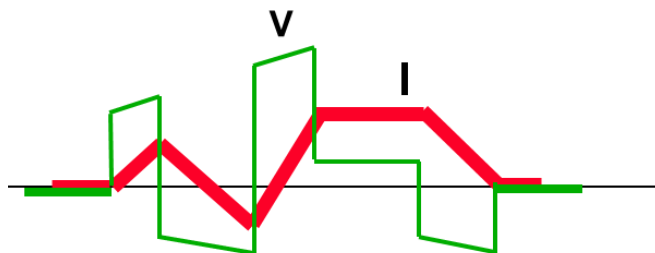


Linear stage to get low voltage ripple!

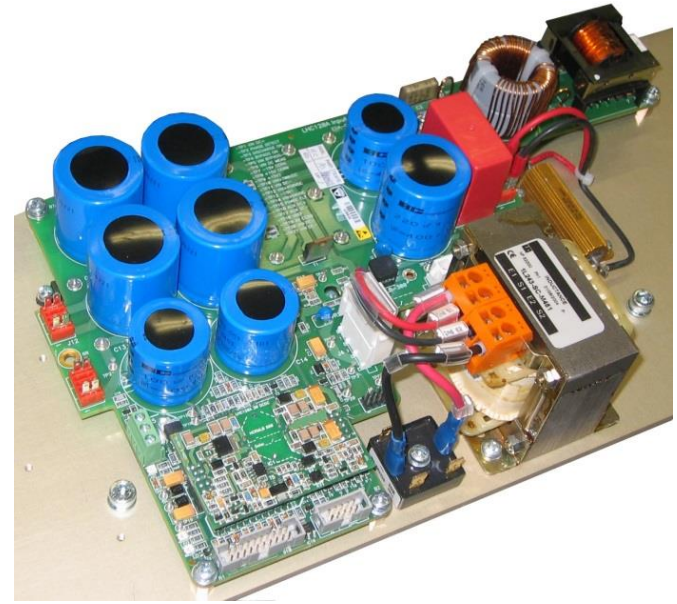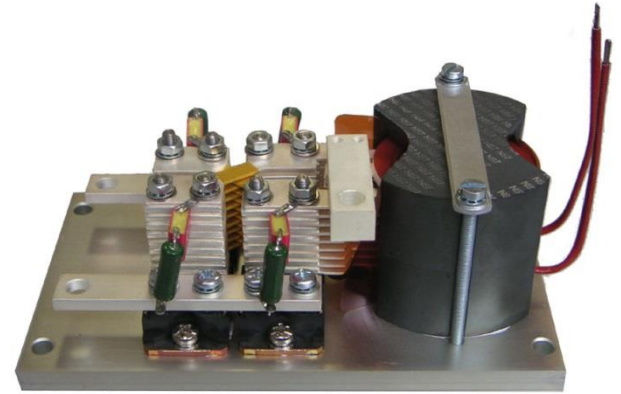



Converter association

When the power demand increases above the rating of the power semiconductors, the only solution is to build a topology with parallel or series connection of sub-system.

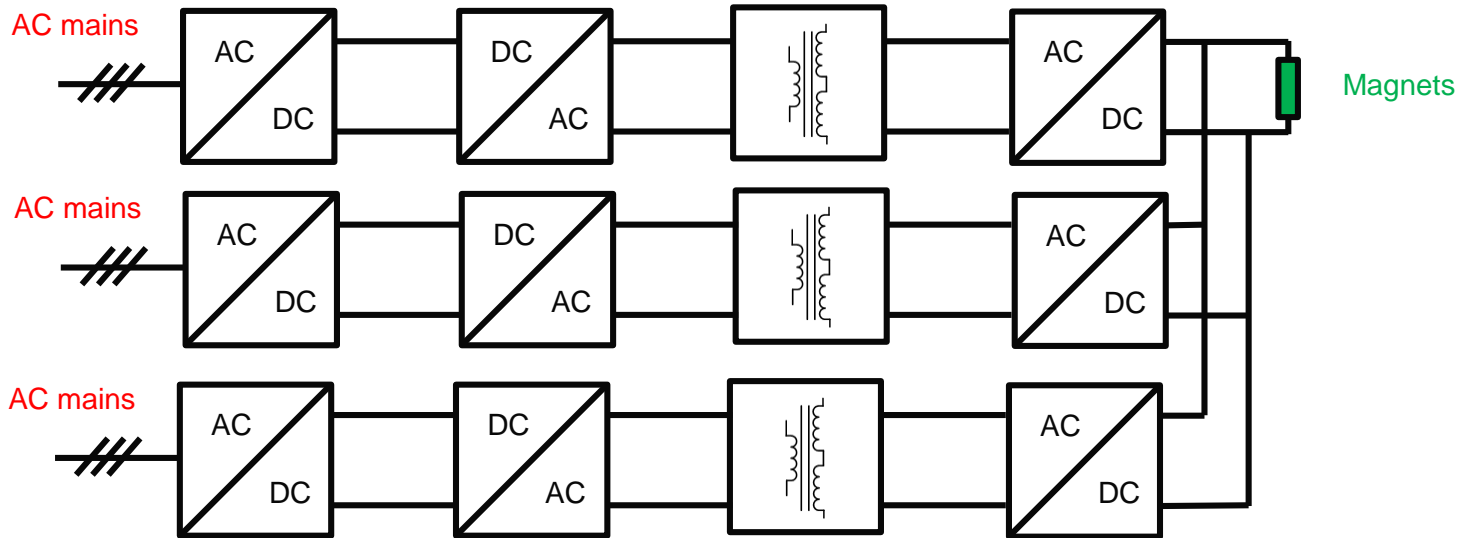



Parallel connection of sub-converters

Example: Atlas toroid magnet power supply 20.5kA/18V

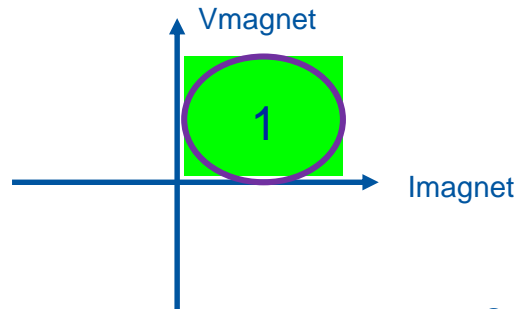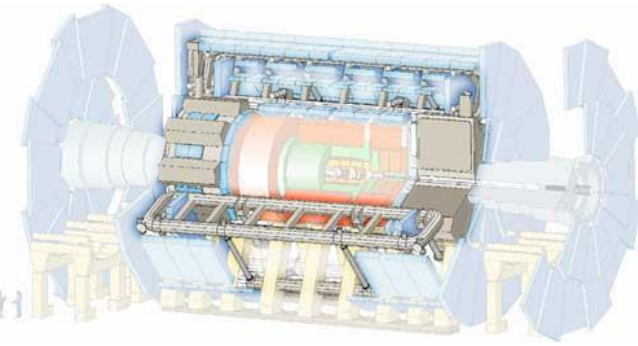

3.25kA/18V sub-converter


8 sub-converters in parallel

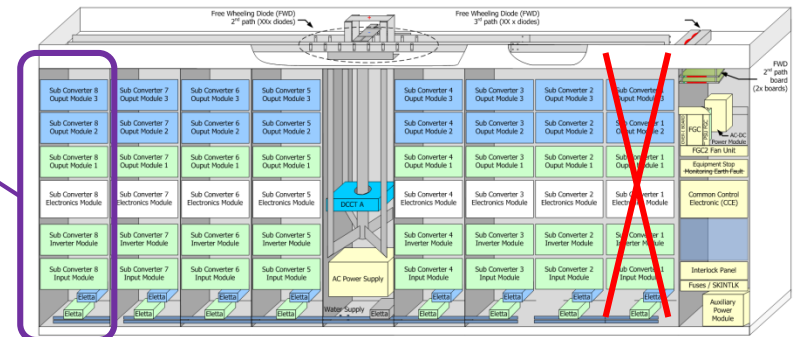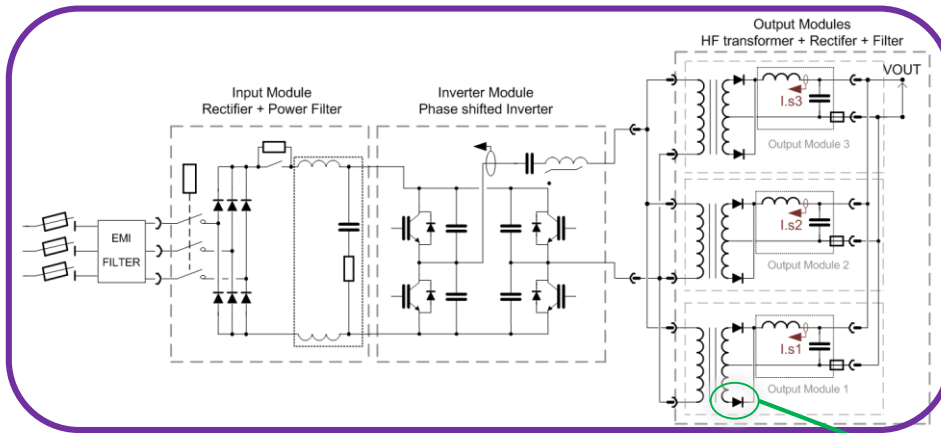



3.25kA/18V

Redundancy implementation, n+1 sub-converters

Can work with only n sub-converters





250A max

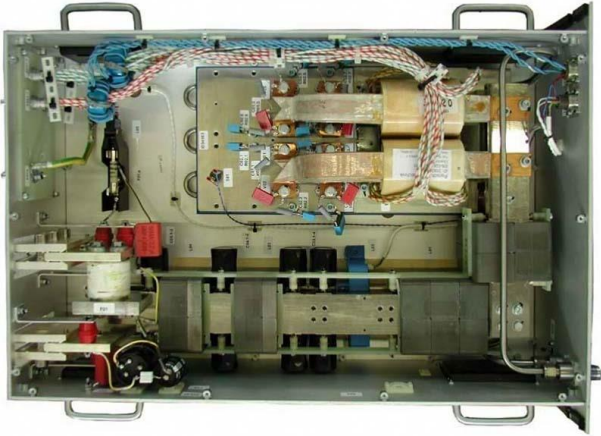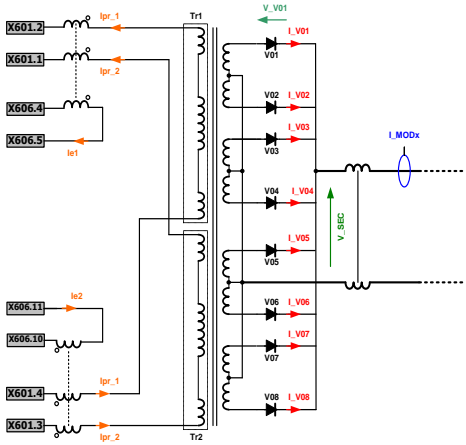


Parallel connection with thyristor rectifier

Example: Alice Dipole, 31kA/150V

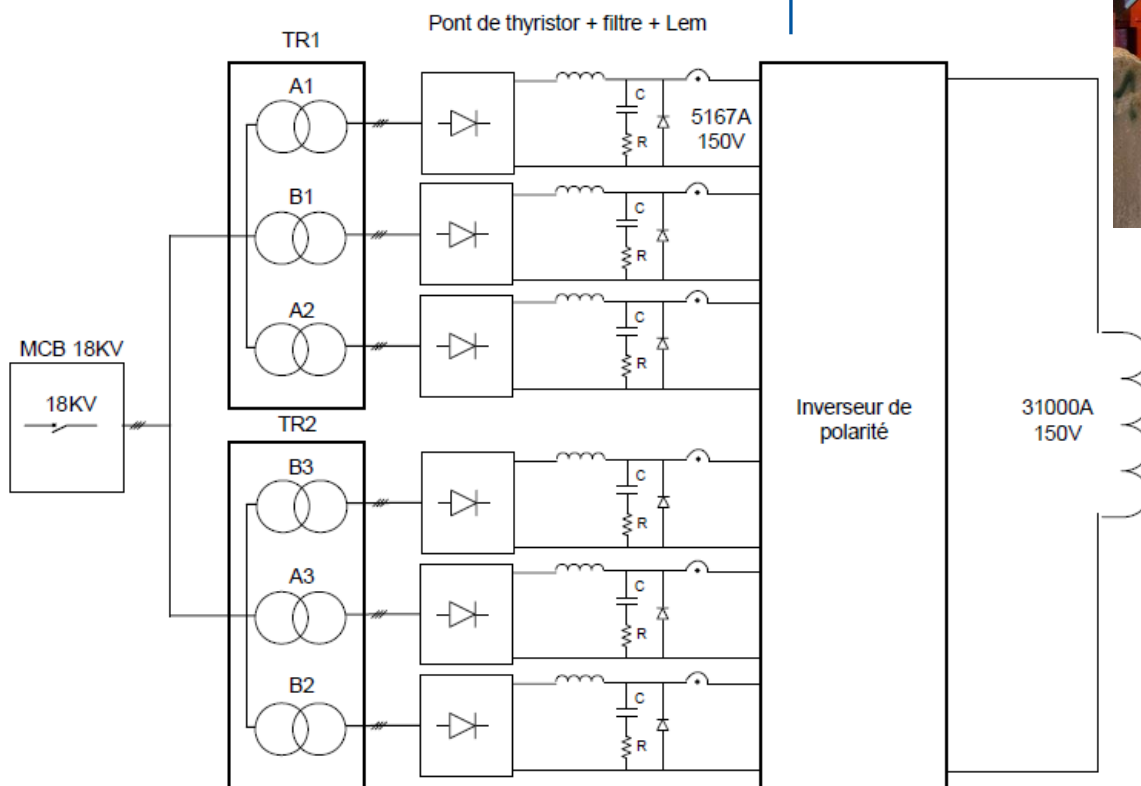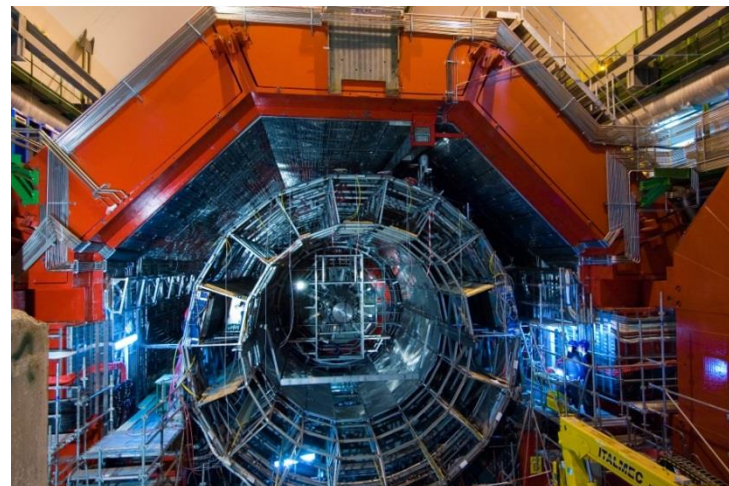


Series connection of sub-converters


Example: SPS dipole power supply, 6kA/24kV

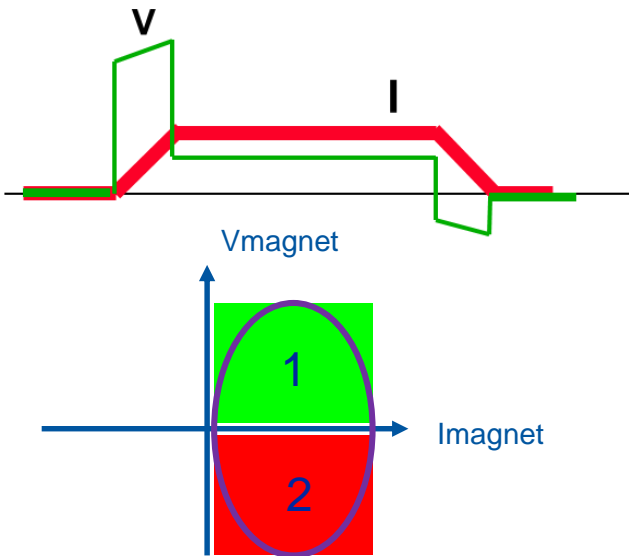

12 power supplies in series between magnets.
Each power supply gives 6kA/2kV.


In total 24kV is applied to the magnets.

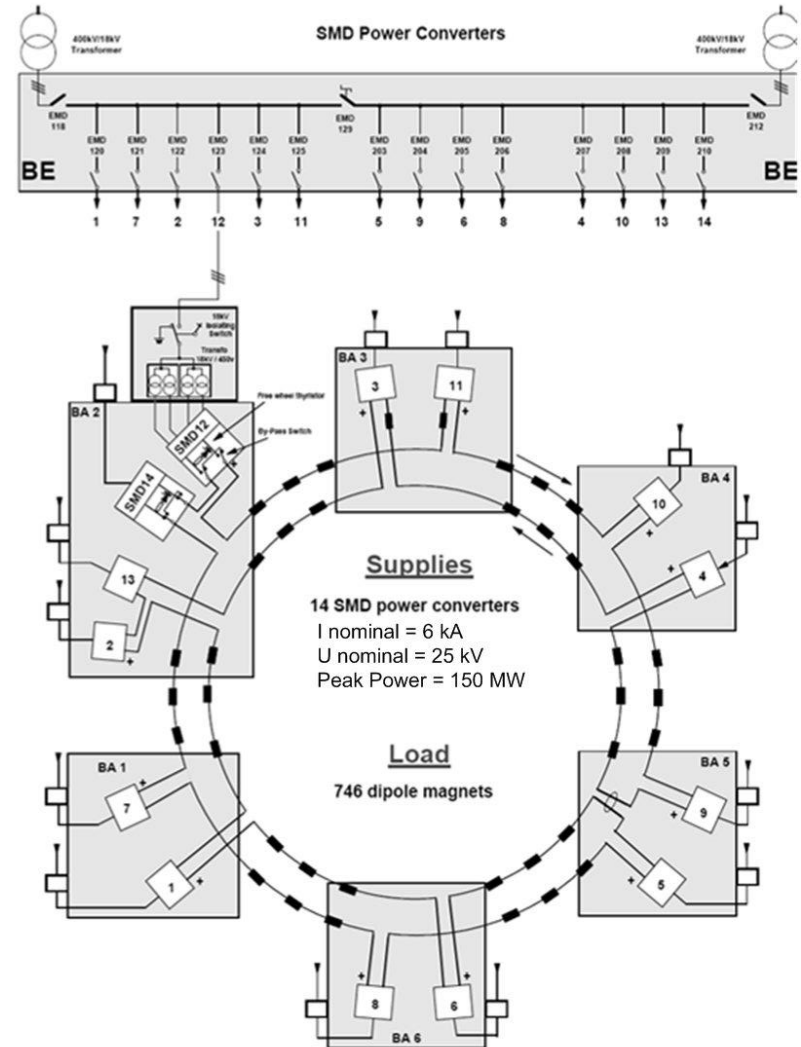

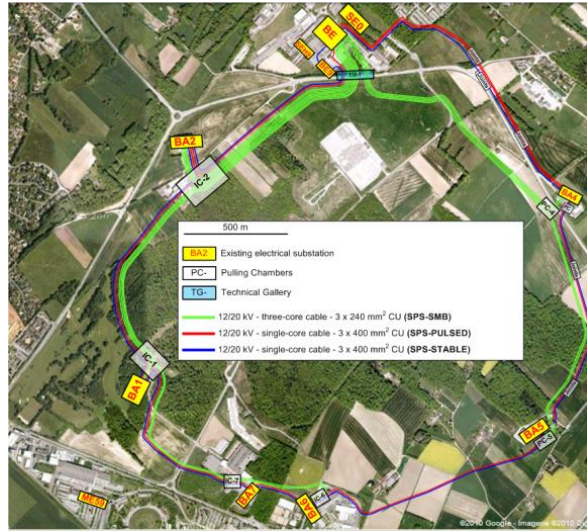


New concept for energy management

Local exchange of energy between magnets and energy storage devices inside the power supply.
Done with capacitor banks integrated in the power supply.

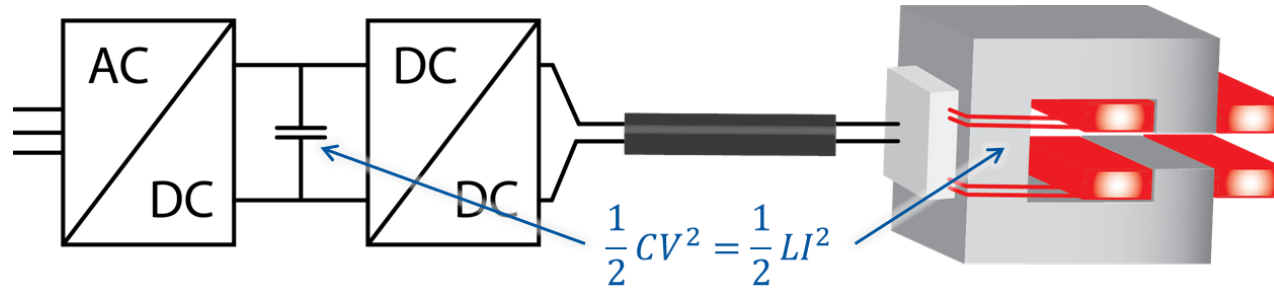

First application with POPS (PS main power system).


- DC/DC converters transfer the power from the storage capacitors to the magnets.
- Four flying capacitors banks are not connected directly to the mains. They are charged via the magnets
- Only two AC/DC converters (called chargers) are connected to the mains and supply the losses of the system and of the magnets.

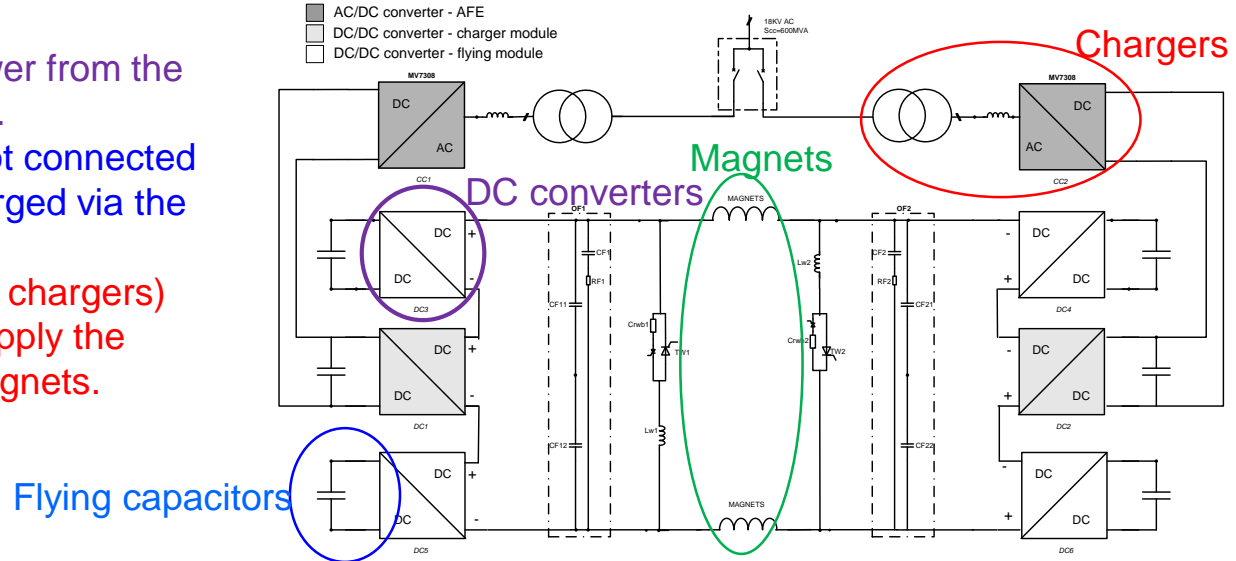

New concept for energy management



Magnets current and voltage

Voltage and current of the magnets

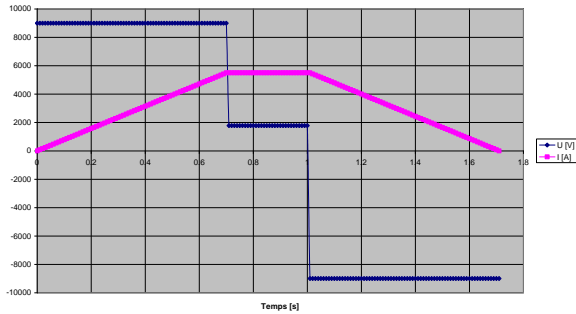


Stored magnetic energy

Inductive Stored Energy of the magnets [J]

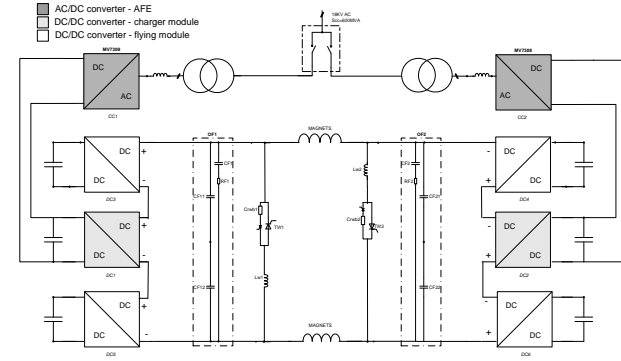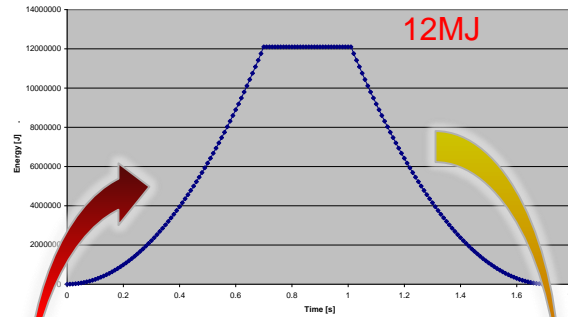


Power to the magnets

Active power of the magnets

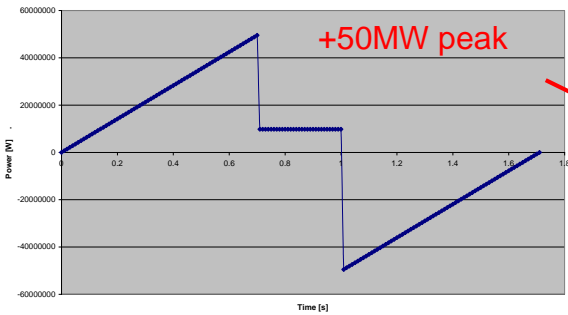


Capacitor banks voltage

Capacitors banks voltage

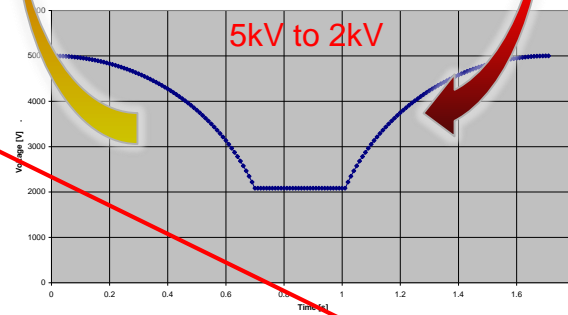

Power from the mains = Magnet resistive losses

Resistive Losses and charger power

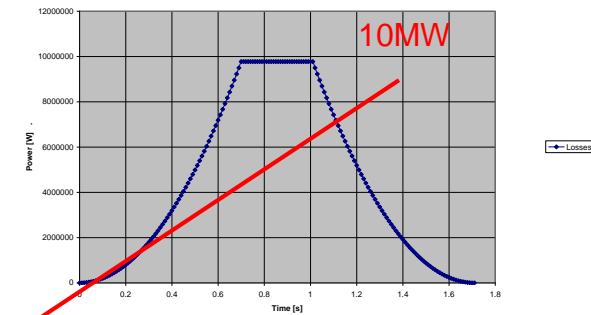

Acts as peak shaving for pulsed loads!

POPS example

Example: POPS 6kA/±10kV

60 tons of capacitors for 18.5MJ
Equivalent to 0.5L of gasoline!




Control room

Electrical room

Cooling tower

Power transformers

Capacitor banks

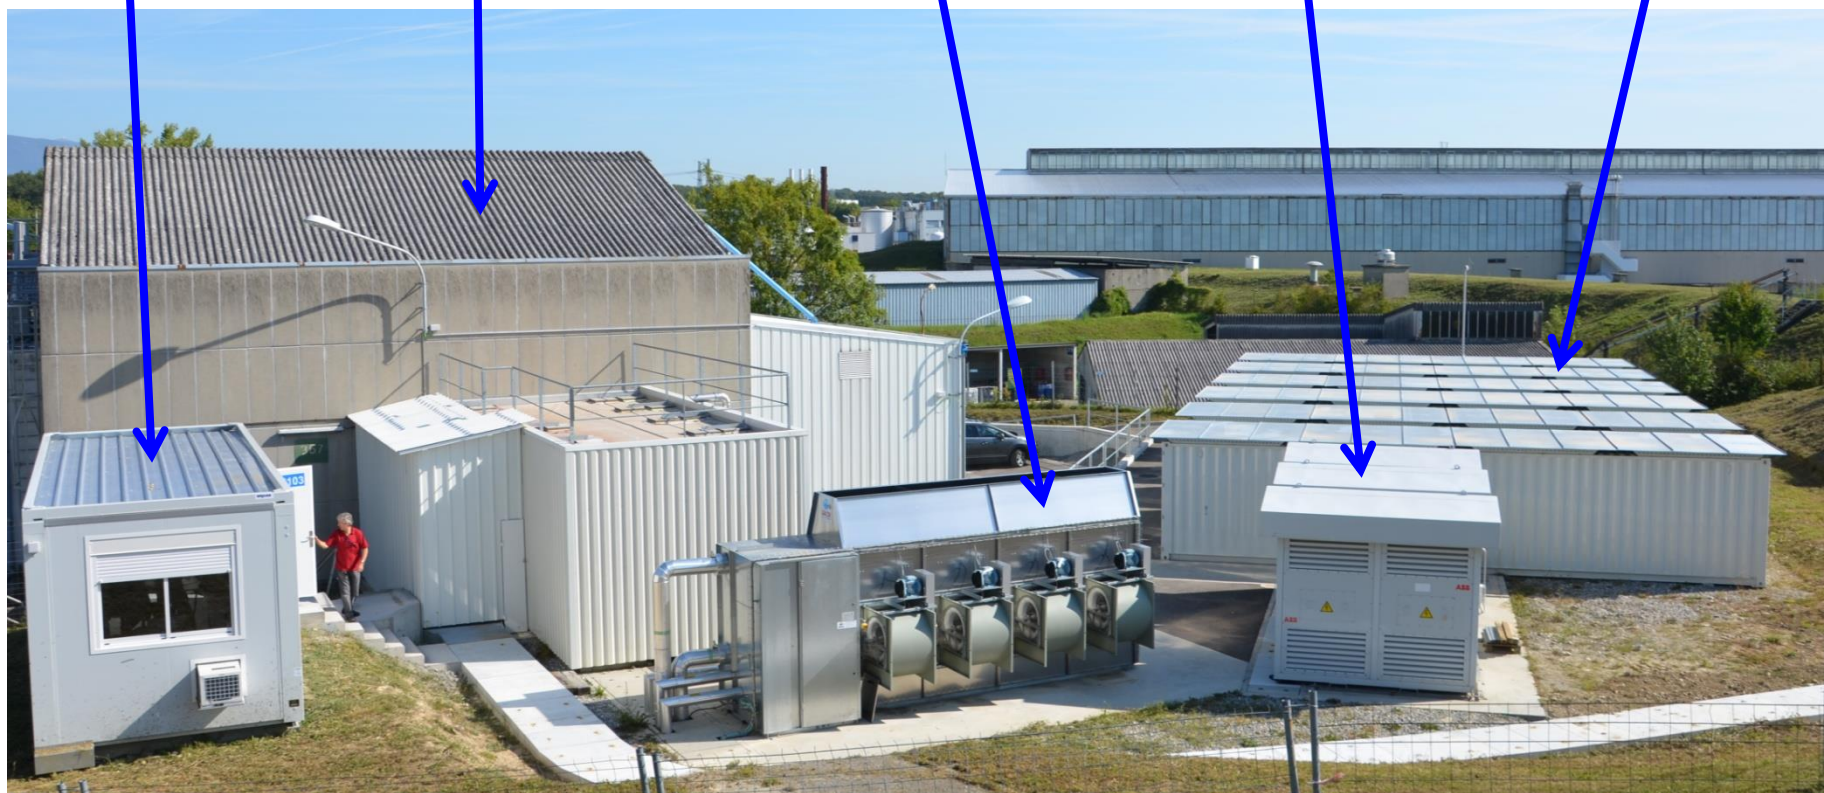

Power supply control



The power supply are controlled by the global control system.

They need to be synchronized => Timing


Locally, a fieldbus (must be deterministic) is used to communicate with a gateway,

WORLDFIP in the LHC


ETHERNET for LINAC4

In each power supply, an electronic box (FGC) manages the communication, the state machine and do the current control.

Real time software is implemented.

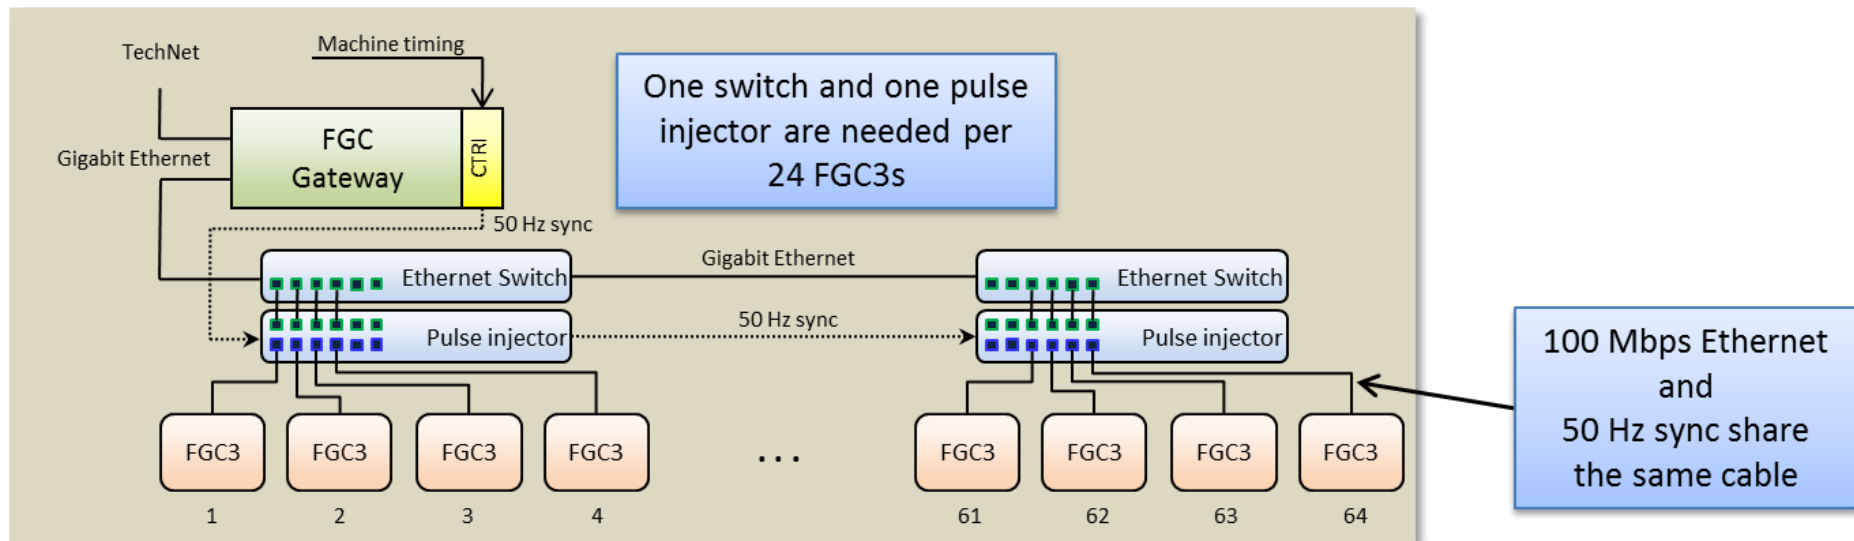

Power supply control

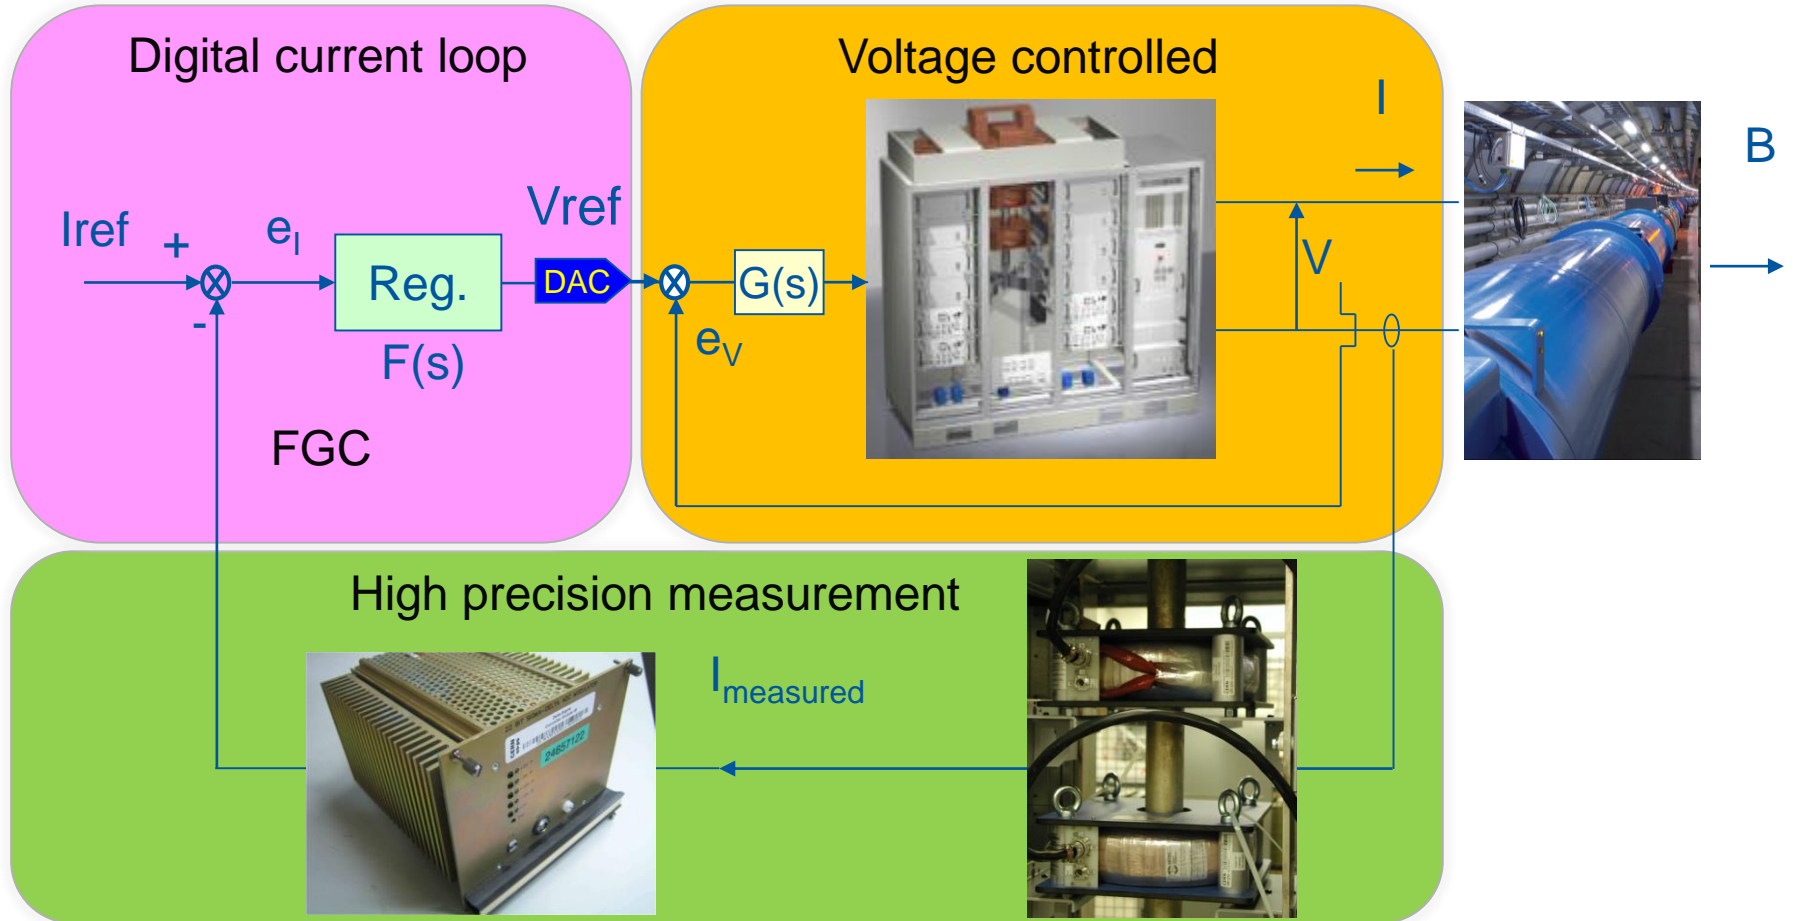


High-precision definition

Accuracy

The closeness of agreement between a test result and the accepted reference value. (ISO)




Reproducibility

Uncertainty when returning to a set of previous working values from cycle to cycle of the machine.

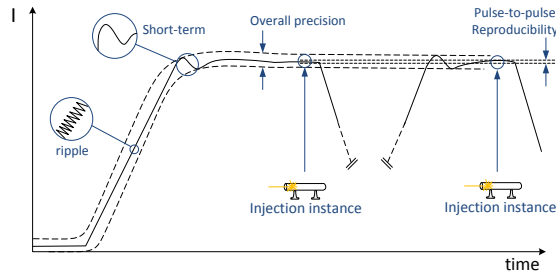






Stability

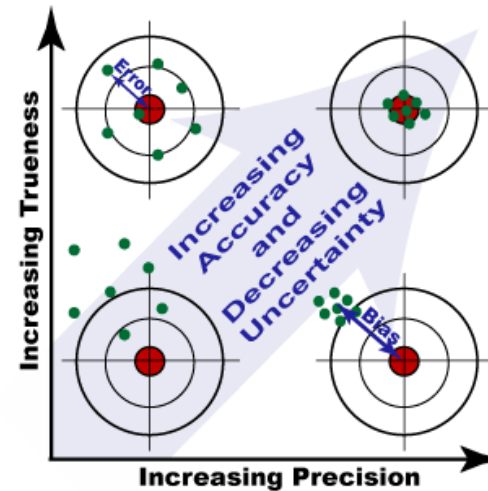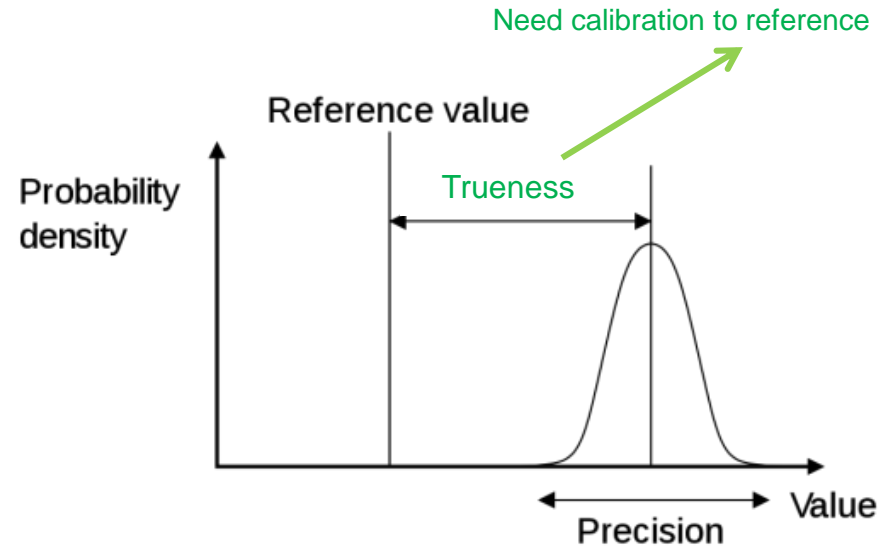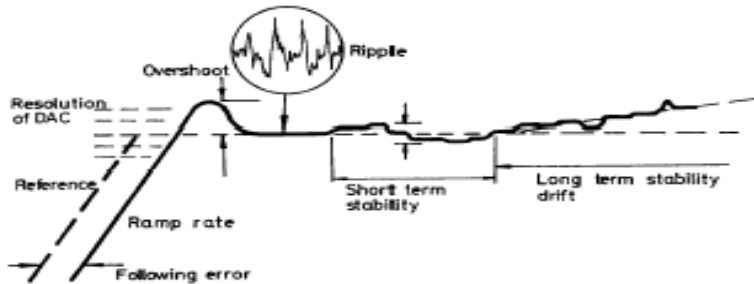Maximum deviation over a period with no changes in operating conditions.

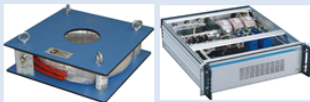

Current measurement technologies

| | DCCTs | Hall effect | CTs | Rogowsky | Shunts |
|---------------|--|--|---|---|---|
| |  |  |  |  |  |
| Principle | Zero flux detection | Hall effect | Faraday's law | Faraday's law | Ohm's law |
| Output | Voltage or current | Voltage or current | Voltage | Voltage | Voltage |
| Accuracy | Best devices can reach a few ppm stability and repeatability | Best devices can reach 0.1% | Typically not better than 1% | Typically %, better possible with digital integrators | Can reach a few ppm for low currents, <% for high currents |
| Ranges | 50A to 20kA | hundreds mA to tens of kA | 50A to 20kA | high currents possible, up to 100kA | From <mA up to to several kA |
| Bandwidth | DC ..kHz for the higher currents, DC..100kHz for lower currents | DC up to couple hundred kHz | Typically 50Hz up to a few hudreds of kHz | Few Hz possible, up to the MHz | Up to some hundreds of kHz with coaxial assemblies |
| Isolation | Yes | Yes | Yes | Yes | No |
| Error sources | <p>Magnetic (remanence, external fields, centering)</p> <p>Burden resistor (thermal settling, stability, linearity, tempco)</p> <p>Output amplifier (stability, noise, CMR, tempco)</p> | <p>Magnetic</p> <p>Burden resistor</p> <p>Output amplifier</p> <p>Hall sensor stability (tempco, piezoelectric effect)</p> | <p>Magnetic (remanence, external fields, centering, magnetizing current)</p> <p>Burden resistor</p> | <p>Magnetic</p> <p>Integrator (offset stability, linearity, tempco)</p> | <p>Power coefficient, tempco, ageing, thermal voltages</p> |
| | DCCT: invented by CERN for particle accelerators | | | | |



LHC class specification

Best achievements

| Converter category | Accuracy Class | ½ hour stability [ppm] | 24h stability [ppm] | 1 year stability [ppm] |
|---|----------------|------------------------|---------------------|------------------------|
| Main Dipoles 13kA-190V | Class 1 | 3 | 5 | 50 |
| Main quadrupoles 13kA-18V | Class 1 | 3 | 5 | 50 |
| Inner Triplets 8kA-8V | Class 1 | 3 | 5 | 50 |
| Separation dipoles, Insertion quadrupoles 4-6-8kA-8V | Class 2 | 5 | 10 | 70 |
| 600A multipole correctors | Class 3 | 10 | 50 | 200 |
| 120A orbit correctors | Class 4 | 50 | 100 | 1000 |
| 60A orbit correctors | Class 4 | 50 | 100 | 1000 |

Resolution

Resolution is the smallest increment that can be induced or discerned.
The resolution is expressed in ppm of maximum DCCT current.
Resolution is directly linked to ADC performance.

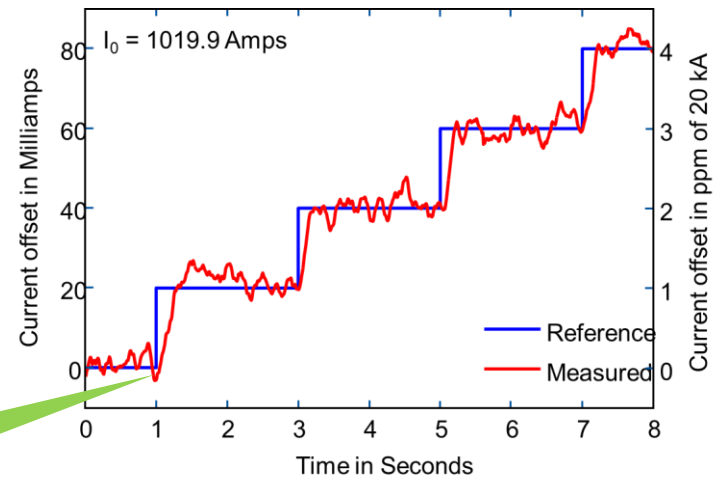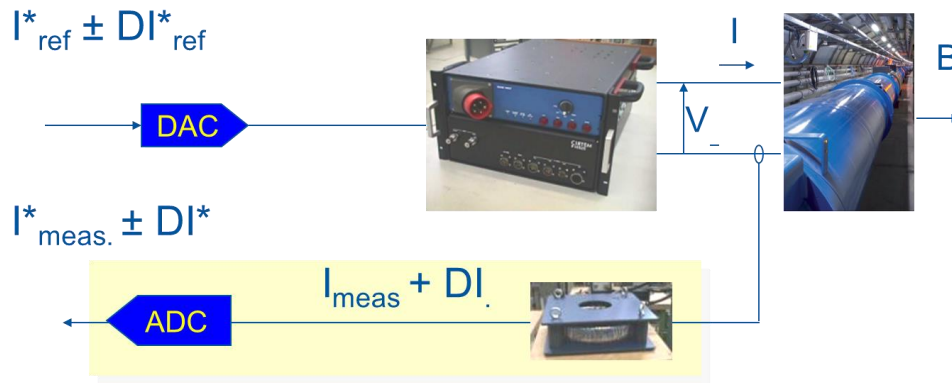

Best resolution achieved = 1ppm


Power supply workflow

From power supply functional specification

<https://edms.cern.ch/document/829344/3>


Power supply design

simulation



Component design

3D mechanical integration




Production




Laboratory Tests



On site commissioning

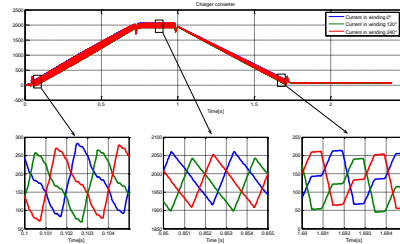

Minimum 18 months
Up to 5 years when
special development is
needed.

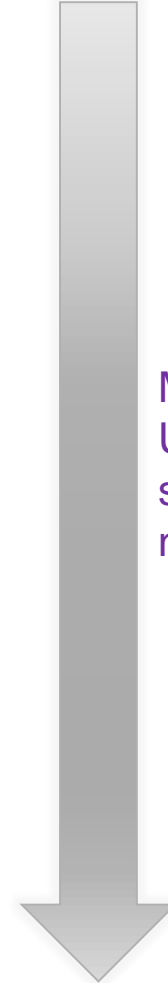

What is special with magnet power supplies?

The magnet power supplies are high-precision current control.

The technical solutions are out the industrial standard

- Need very low ripple
- Need current and voltage control over large range
- Operation in 1-2-4 quadrant

- Need high-precision measurement
- Need high-performance electronics
- Need sophisticated control and algorithm

Custom power supplies

Special topologies

Special control electronics

Summary

Power supplies are key devices for particle accelerators (like an engine in a car).

Operators in control room play with power supplies to control the beams.

Their performances have a direct impact on the beam quality.

Creativity is required in many technical fields!

More information:

Special CAS on power converters

7 – 14 May 2014 Baden (CH)