

# Basic Mathematics

Rende Steerenberg BE/OP

CERN Accelerator School

Basic Accelerator Science & Technology at CERN

4 - 8 November 2013 – Chavannes de Bogis

- Vectors & Matrices
- Differential Equations
- Some Units we use

- **Vectors & Matrices**
- Differential Equations
- Some Units we use

# Scalars & Vectors


**Scalar**, a single quantity or value



**Vector**, (origin,) length, direction




A **vector** has 2 or more quantities associated with it

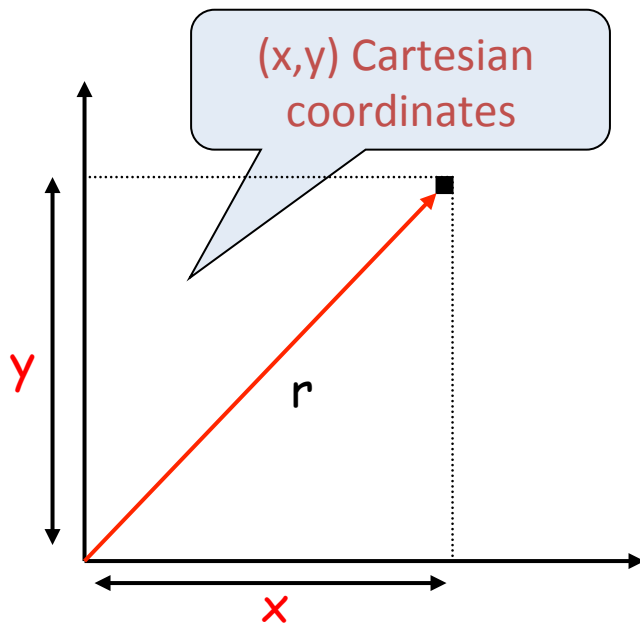

$r$  is the length of the vector

$$r = \sqrt{x^2 + y^2}$$

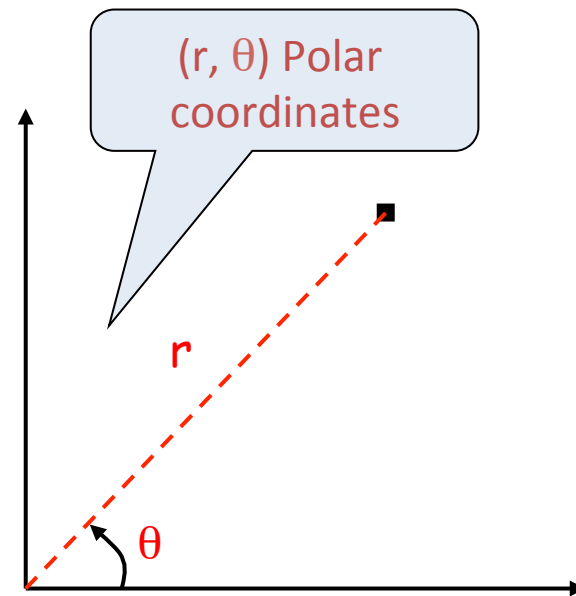


$\theta$  gives the direction of the vector

$$\tan(\theta) = \frac{y}{x} \Rightarrow \theta = \arctan\left(\frac{y}{x}\right)$$

# Vector Cross Product

$\vec{a}$  and  $\vec{b}$  are two vectors in the in a plane separated by angle  $\theta$

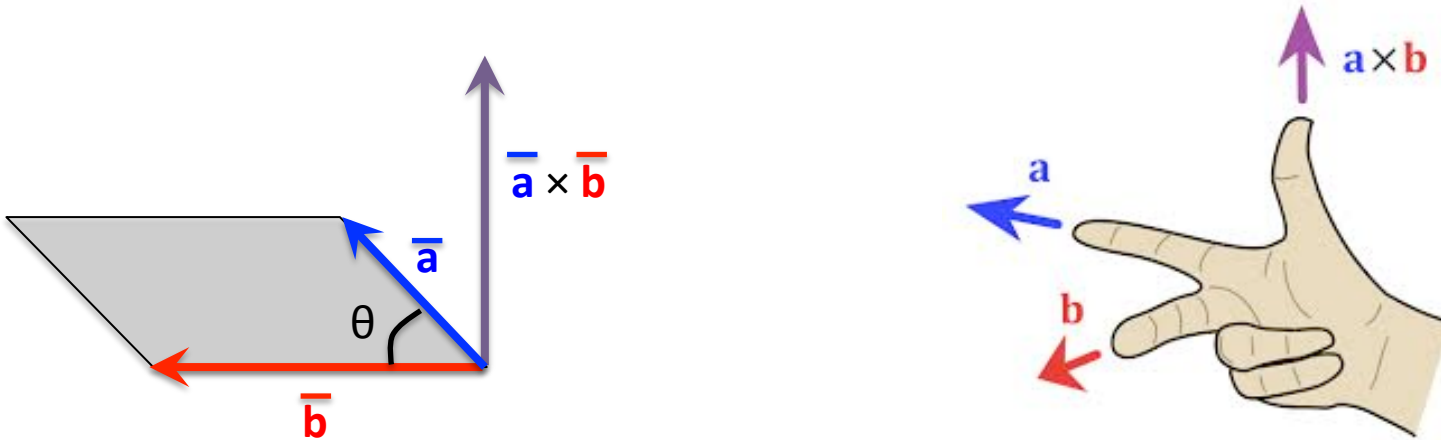



The cross product  $\vec{a} \times \vec{b}$  is defined by:

- **Direction:**  $\vec{a} \times \vec{b}$  is perpendicular (normal) on the plane through  $\vec{a}$  and  $\vec{b}$
- The **length** of  $\vec{a} \times \vec{b}$  is the surface of the parallelogram formed by  $\vec{a}$  and  $\vec{b}$

$$|\vec{a} \times \vec{b}| = |\vec{a}| \cdot |\vec{b}| \cdot \sin(\theta)$$

The Lorentz force is a pure magnetic field

$$F = e(\vec{v} \times \vec{B})$$

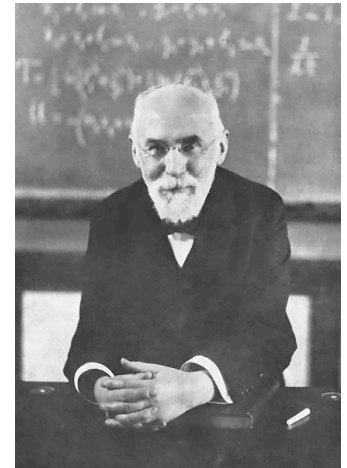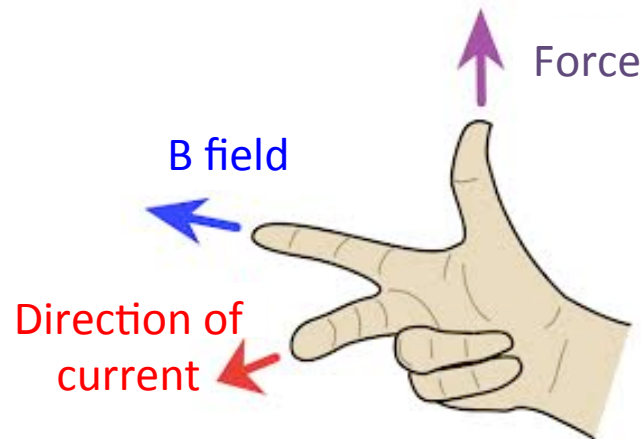


The reason why our particles move around our “circular” machines under the influence of the magnetic fields

Tuesday

“E.M. fields” by Werner Herr  
 “Transverse Beam Dynamics” by Bernhard Holzer


This afternoon

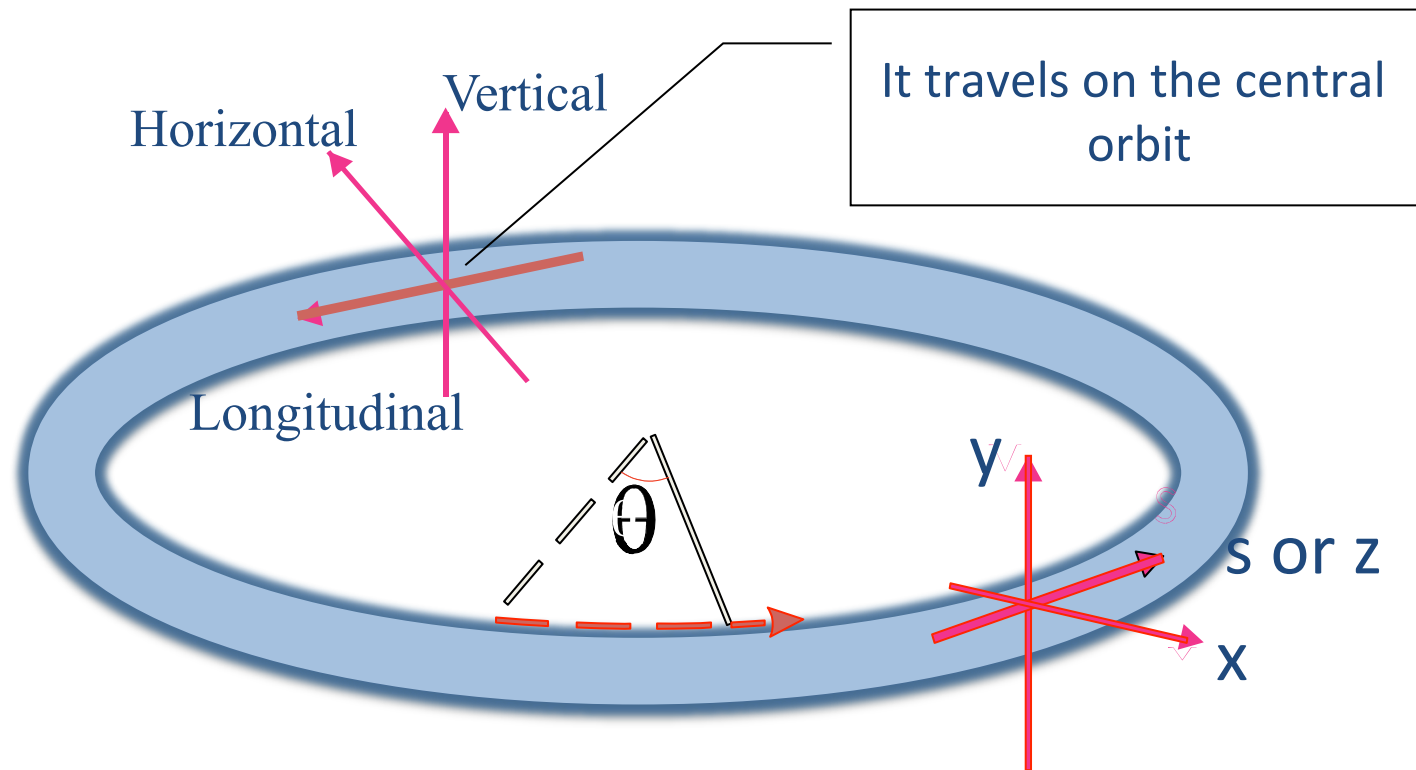



# Moving a Point

To move from one point (A) to any other point (B) one needs control of both Length and Direction.

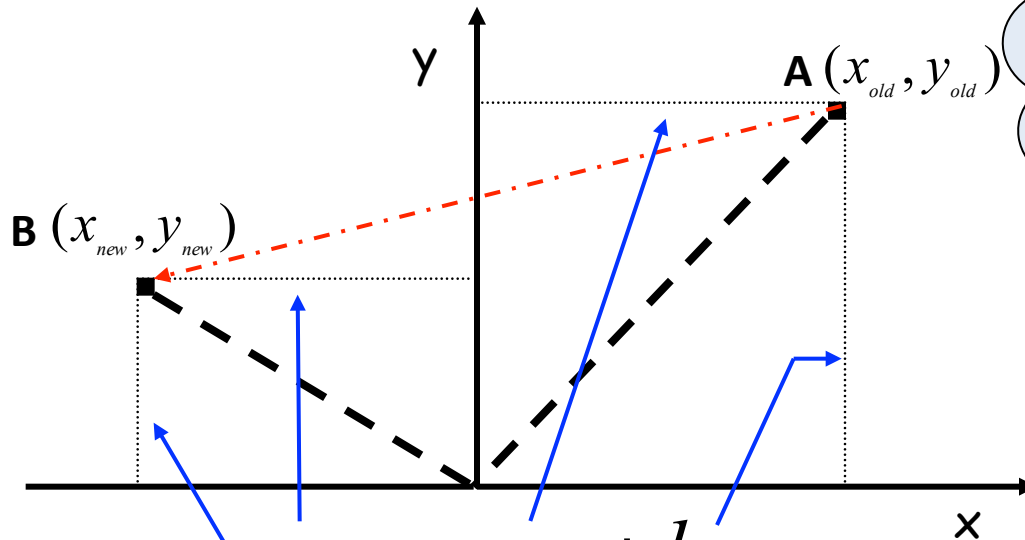


$$x_{new} = ax_{old} + by_{old}$$

$$y_{new} = cx_{old} + dy_{old}$$

**2 equations needed !!!**

**Rather clumsy !**  
Is there a more efficient way of doing this ?

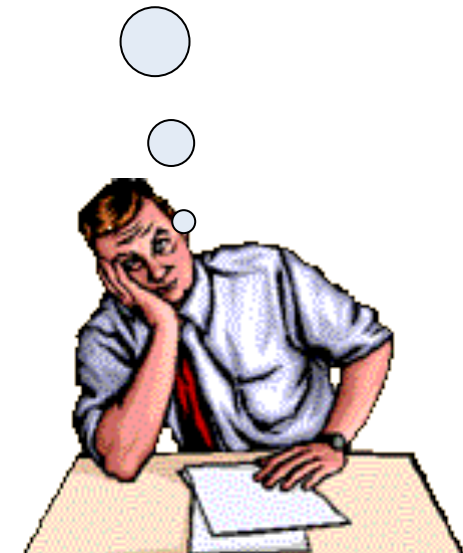

# Matrices & Vectors

So, we have: 
$$\begin{cases} x_{new} = ax_{old} + by_{old} \\ y_{new} = cx_{old} + dy_{old} \end{cases}$$


Lets write this as one equation:

$$\vec{B} = M\vec{A}$$

$$\begin{pmatrix} x_{new} \\ y_{new} \end{pmatrix} = \begin{pmatrix} a & b \\ c & d \end{pmatrix} \begin{pmatrix} x_{old} \\ y_{old} \end{pmatrix}$$

Rows

Columns

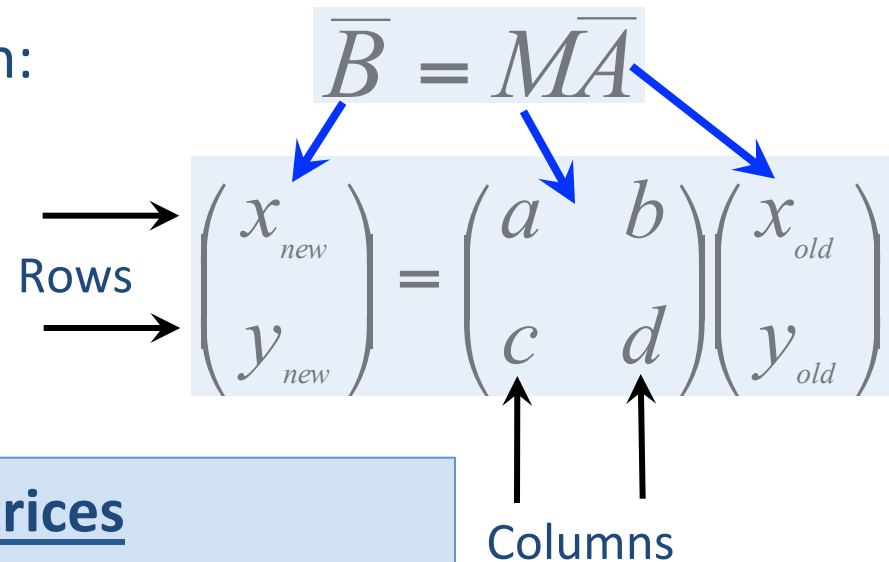

- $\vec{A}$  and  $\vec{B}$  are Vectors or Matrices
- $\vec{A}$  and  $\vec{B}$  have 2 rows and 1 column
- $M$  is a Matrix and has 2 rows and 2 columns


This implies:

$$\left. \begin{aligned} x_{new} &= ax_{old} + by_{old} \\ y_{new} &= cx_{old} + dy_{old} \end{aligned} \right\} \text{Equals } \left\{ \begin{pmatrix} x_{new} \\ y_{new} \end{pmatrix} = \begin{pmatrix} a & b \\ c & d \end{pmatrix} \begin{pmatrix} x_{old} \\ y_{old} \end{pmatrix} \right.$$

This defines the rules for matrix multiplication

$$\begin{pmatrix} i & j \\ k & l \end{pmatrix} = \begin{pmatrix} a & b \\ c & d \end{pmatrix} \begin{pmatrix} e & f \\ g & h \end{pmatrix}$$


Is this really simpler?

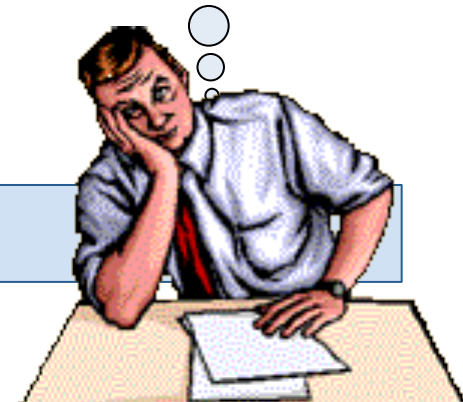

This matrix multiplication results in:

$$i = ae + bg, j = af + bh, k = ce + dg, l = cf + dh$$

Lets apply what we just learned and move a point around:

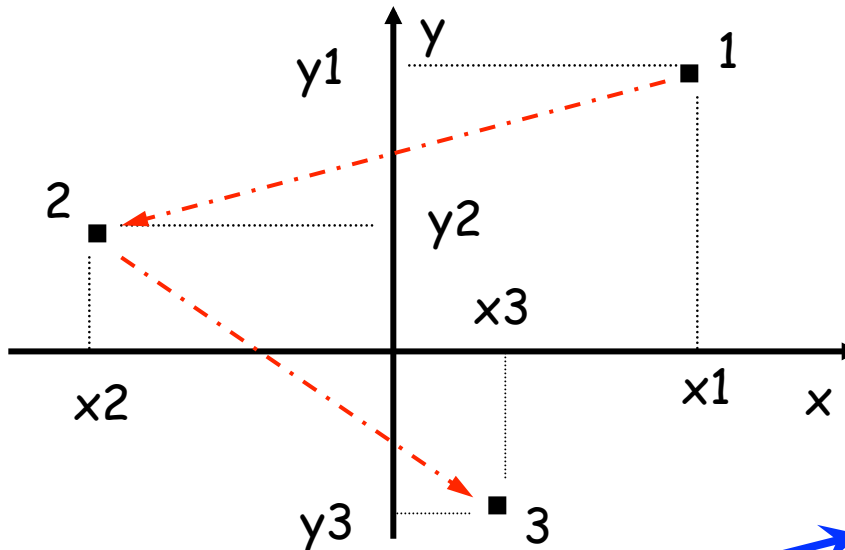

- M1 transforms 1 to 2
- M2 transforms 2 to 3
- This defines  $M3=M2M1$

$$\begin{pmatrix} x_2 \\ y_2 \end{pmatrix} = M1 \begin{pmatrix} x_1 \\ y_1 \end{pmatrix}$$

$$\begin{pmatrix} x_3 \\ y_3 \end{pmatrix} = M2 \begin{pmatrix} x_2 \\ y_2 \end{pmatrix} = M2.M1 \begin{pmatrix} x_1 \\ y_1 \end{pmatrix}$$

$$\begin{pmatrix} x_3 \\ y_3 \end{pmatrix} = M3 \begin{pmatrix} x_1 \\ y_1 \end{pmatrix}$$

- We use matrices to describe the various magnetic elements in our accelerator.
  - The **x** and **y** co-ordinates are the position and angle of each individual particle.
  - If we know the position and angle of any particle at one point, then to calculate its position and angle at another point we multiply all the matrices describing the magnetic elements between the two points to give a single matrix
- Now we are able to calculate the final co-ordinates for any initial pair of particle co-ordinates, provided all the element matrices are known.

See Bernhard Holzer's lectures

# The Unit Matrix

There is a special matrix that when multiplied with an initial point will result in the same final point.

$$\begin{pmatrix} x_{new} \\ y_{new} \end{pmatrix} = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} \begin{pmatrix} x_{old} \\ y_{old} \end{pmatrix}$$

The result is :  $\left\{ \begin{array}{l} X_{new} = X_{old} \\ Y_{new} = Y_{old} \end{array} \right.$

The Unit matrix has no effect on x and y

# Going backwards

What about **going back** from a **final** point to the corresponding **initial** point ?

$$\begin{pmatrix} x_{new} \\ y_{new} \end{pmatrix} = \begin{pmatrix} a & b \\ c & d \end{pmatrix} \begin{pmatrix} x_{old} \\ y_{old} \end{pmatrix} \quad \text{or} \quad \bar{B} = M\bar{A}$$

For the reverse we need another matrix  $M^{-1}$

$$\bar{A} = M^{-1}\bar{B} \quad \text{such that} \quad \bar{B} = MM^{-1}\bar{B}$$

The combination of  $M$  and  $M^{-1}$  does have no effect

$$MM^{-1} = \textit{Unit Matrix}$$

$M^{-1}$  is the “**inverse**” or “**reciprocal**” matrix of  $M$ .

If we have a 2 x 2 matrix:

$$M = \begin{bmatrix} a & b \\ c & d \end{bmatrix}$$

Then the inverse matrix is calculated by:

$$M^{-1} = \frac{1}{(ad - bc)} \begin{bmatrix} d & -b \\ -c & a \end{bmatrix}$$

The term (ad - bc) is called the determinate, which is just a number (scalar).



# A Practical Example

- Changing the current in two sets of quadrupole magnets (F & D) changes the horizontal and vertical tunes ( $Q_h$  &  $Q_v$ ).
- This can be expressed by the following matrix relationship:

$$\begin{pmatrix} \Delta Q_h \\ \Delta Q_v \end{pmatrix} = \begin{pmatrix} a & b \\ c & d \end{pmatrix} \begin{pmatrix} \Delta I_F \\ \Delta I_D \end{pmatrix} \quad \text{or} \quad \overline{\Delta Q} = M \overline{\Delta I}$$


- Change  $I_F$  then  $I_D$  and measure the changes in  $Q_h$  and  $Q_v$
- Calculate the matrix  $M$
- Calculate the inverse matrix  $M^{-1}$
- Use now  $M^{-1}$  to calculate the current changes ( $\Delta I_F$  and  $\Delta I_D$ ) needed for any required change in tune ( $\Delta Q_h$  and  $\Delta Q_v$ ).

$$\overline{\Delta I} = M^{-1} \overline{\Delta Q}$$

- Vectors & Matrices
- **Differential Equations**
- Some Units we use

# The Pendulum


- Lets use a pendulum as example
- The **length** of the pendulum is **L**
- It has a **mass m** attached to it
- It moves back and forth under the **influence of gravity**

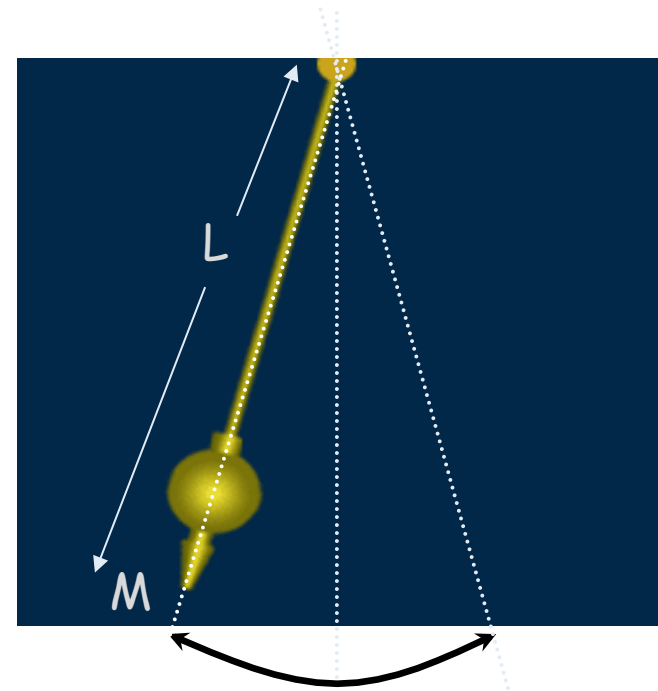

- Lets try to find an **equation** that **describes the motion** of the mass **m** makes.
- This will result in a **Differential Equation**

# Differential Equation

The distance from the centre =  $L\theta$  (since  $\theta$  is small)

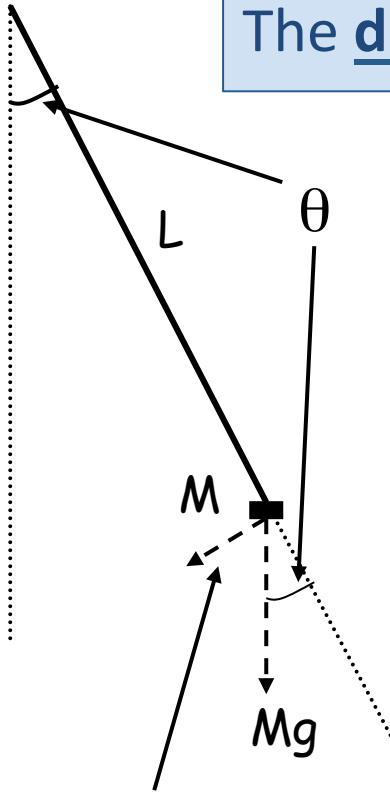

- The velocity of mass M is:  $v = \frac{d(L\theta)}{dt}$
- The acceleration of mass M is:  $a = \frac{d^2(L\theta)}{dt^2}$
- Newton: Force = mass x acceleration

$$-Mg \sin \theta = M \frac{d^2(L\theta)}{dt^2}$$

Restoring force due to gravity is  
 $-M g \sin \theta$   
 (force opposes motion)

$$\frac{d^2(\theta)}{dt^2} + \left(\frac{g}{L}\right)\theta = 0 \quad \left\{ \begin{array}{l} \theta \text{ is small} \\ L \text{ is constant} \end{array} \right.$$

$$\frac{d^2(\theta)}{dt^2} + \left(\frac{g}{L}\right)\theta = 0$$

Differential equation describing the motion of a pendulum at small amplitudes.

Find a solution.....Try a good “guess” .....

$$\theta = A \cos(\omega t)$$

Differentiate our guess (twice)

$$\frac{d(\theta)}{dt} = -A\omega \sin(\omega t) \quad \text{and} \quad \frac{d^2(\theta)}{dt^2} = -A\omega^2 \cos(\omega t)$$

Put this and our “guess” back in the original Differential equation.

$$-\omega^2 \cos(\omega t) + \left(\frac{g}{L}\right)\cos(\omega t) = 0$$

Now we have to find the solution for the following equation:

$$-\omega^2 \cos(\omega t) + \left(\frac{g}{L}\right) \cos(\omega t) = 0$$

Solving this equation gives:

$$\omega = \sqrt{\frac{g}{L}}$$

The final solution of our differential equation, describing the motion of a pendulum is as we expected :

$$\theta = A \cos \sqrt{\left(\frac{g}{L}\right)} t$$

Oscillation amplitude  $\nearrow$   $\nwarrow$  Oscillation frequency

# Position & Velocity

The differential equation that describes the transverse motion of the particles as they move around our accelerator.

$$\frac{d^2(x)}{dt^2} + (K)x = 0$$

The solution of this second order describes oscillatory motion


For any system, where the restoring force is proportional to the displacement, the solution for the displacement will be of the form:

$$x = x_0 \cos(\omega t) \qquad \frac{dx}{dt} = -x_0 \omega \sin(\omega t)$$

Plot the velocity as a function of displacement:

$$x = x_0 \cos(\omega t)$$


$$\frac{dx}{dt} = -x_0 \omega \sin(\omega t)$$

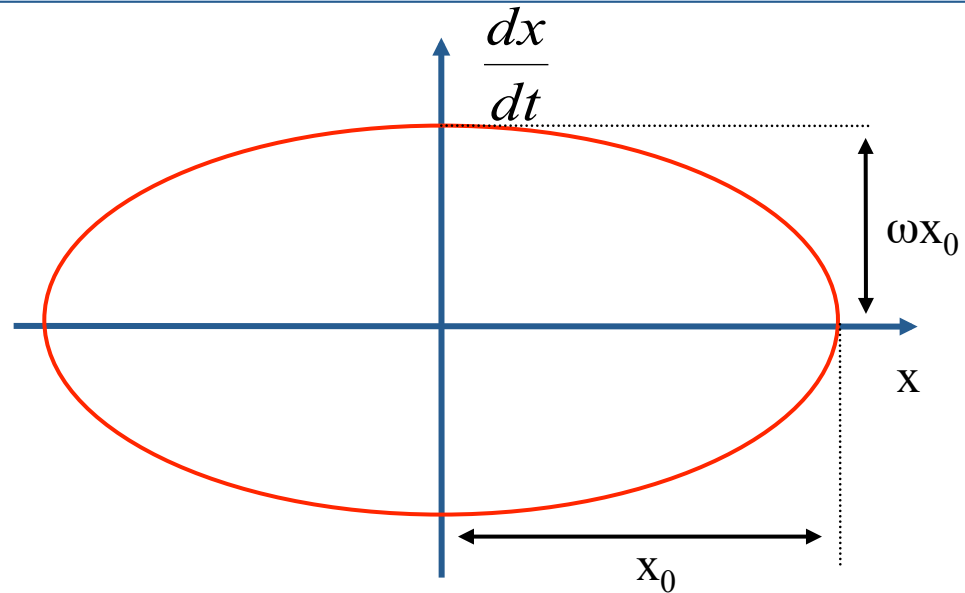

- It is an ellipse.
- As  $\omega t$  advances by  $2\pi$  it repeats itself.
- This continues for  $(\omega t + k 2\pi)$ , with  $k=0, \pm 1, \pm 2, \dots$  etc



Under the influence of the **magnetic fields** the **particle oscillate**

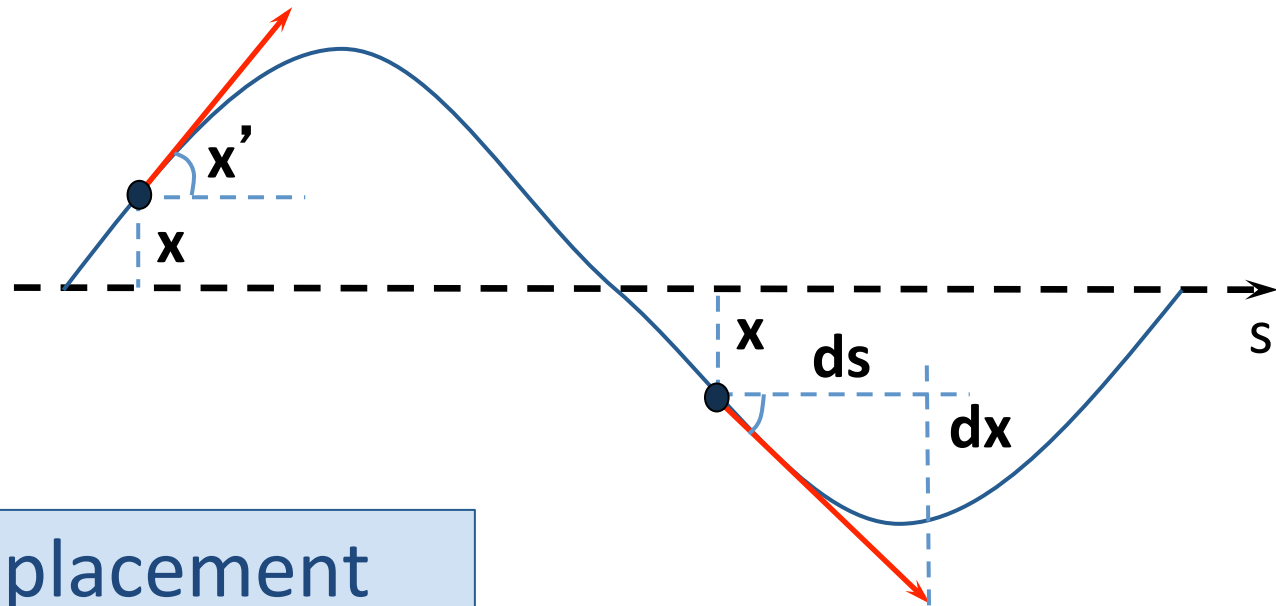


$x$  = displacement  
 $x'$  = angle =  $dx/ds$

This changes slightly the Phase Space plot

Position  $x$

Angle  $x' = \frac{dx}{ds}$


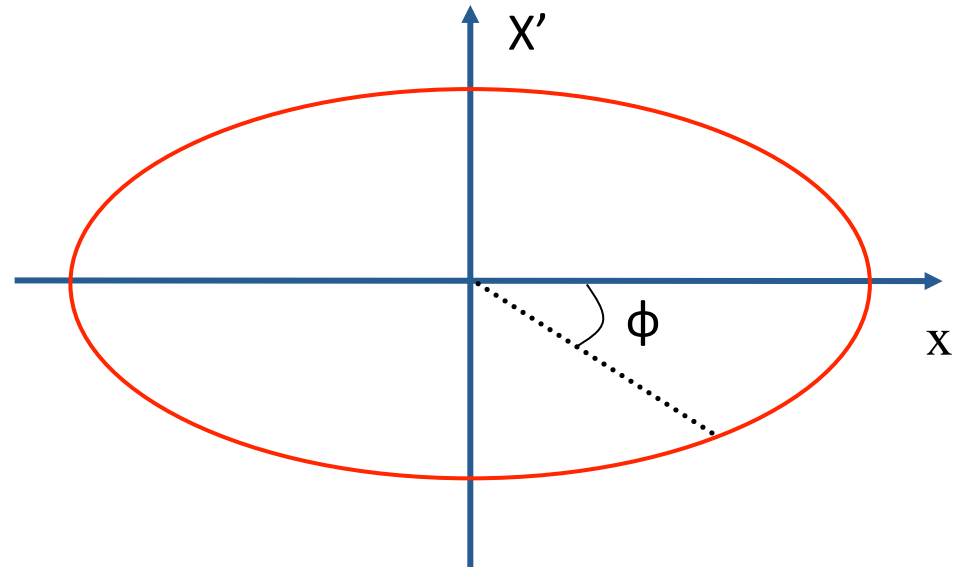


- $\phi = \omega t$  is called the **phase angle**
- X-axis is the horizontal or vertical position (or time).
- Y-axis is the horizontal or vertical phase angle (or energy).

- Vectors & Matrices
- Differential Equations
- **Some Units we use**

# Relativity

Basics of Accelerator Science & Technology at CERN

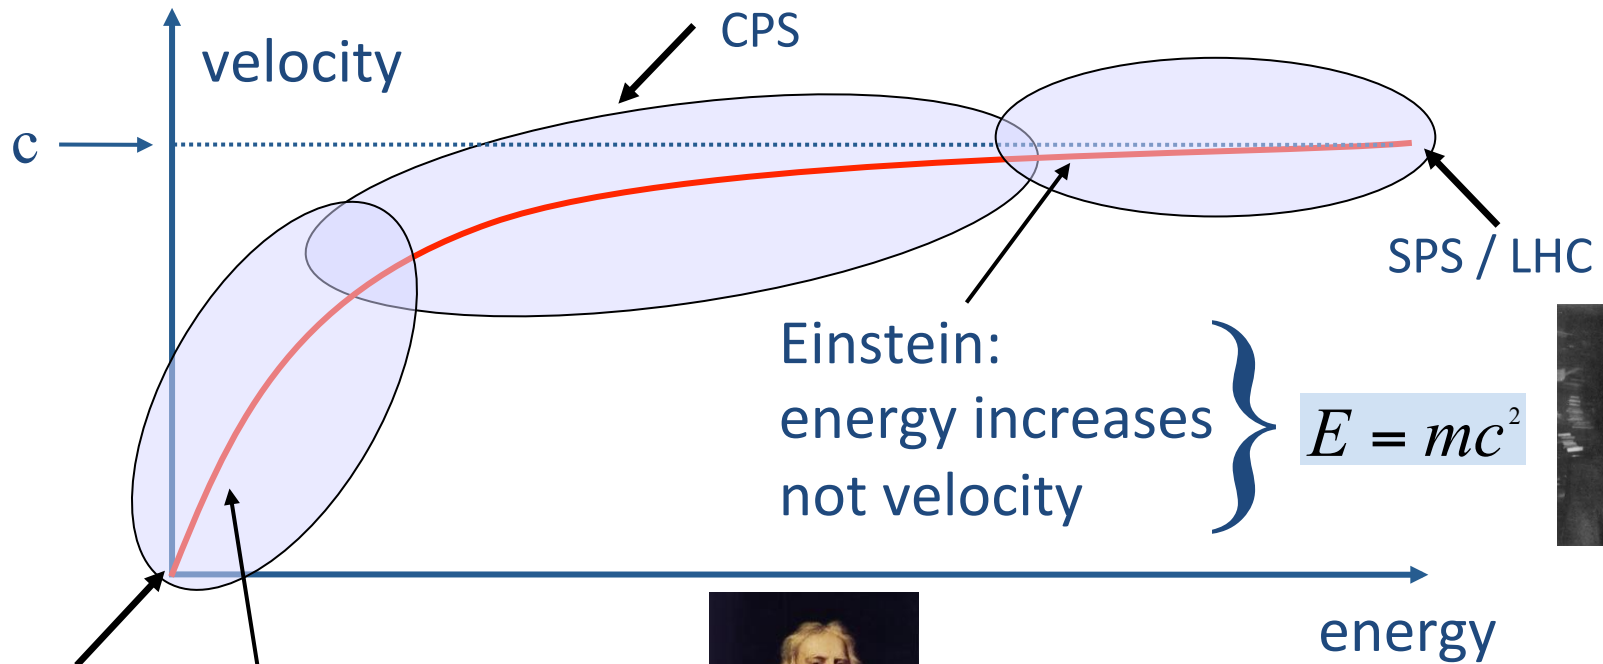

Newton:

$$E = \frac{1}{2}mv^2$$



More about "Relativity" by Werner Herr

This afternoon

- The unit most commonly used for **Energy** is **Joules [J]**
- In accelerator and particle physics we talk about **eV...!?**
- The **energy** acquired by an **electron** in a potential of **1 Volt** is defined as being **1 eV**

- **1 eV** is **1 elementary charge** ‘pushed’ by **1 Volt**.

$$1 \text{ eV} = 1.6 \times 10^{-19} \text{ Joules}$$

- The unit eV is too small to be used currently, we use:  
1 keV =  $10^3$  eV; 1 MeV =  $10^6$  eV; 1 GeV =  $10^9$  eV; 1 TeV =  $10^{12}$  eV,.....

Einstein's formula:

$$E = mc^2, \text{ which for a mass at rest is: } E_0 = m_0 c^2$$

The ratio between the total energy and the rest energy is

$$\gamma = \frac{E}{E_0}$$

The ratio between the real velocity and the velocity of light is


$$\beta = \frac{v}{c}$$

Then the mass of a moving particle is:  $m = \gamma m_0$

We can write:  $\beta = \frac{mvc}{mc^2}$

Momentum is:  $p = mv$

$$\left. \begin{array}{l} \beta = \frac{mvc}{mc^2} \\ p = mv \end{array} \right\} \beta = \frac{pc}{E} \quad \text{or} \quad p = \frac{E\beta}{c}$$

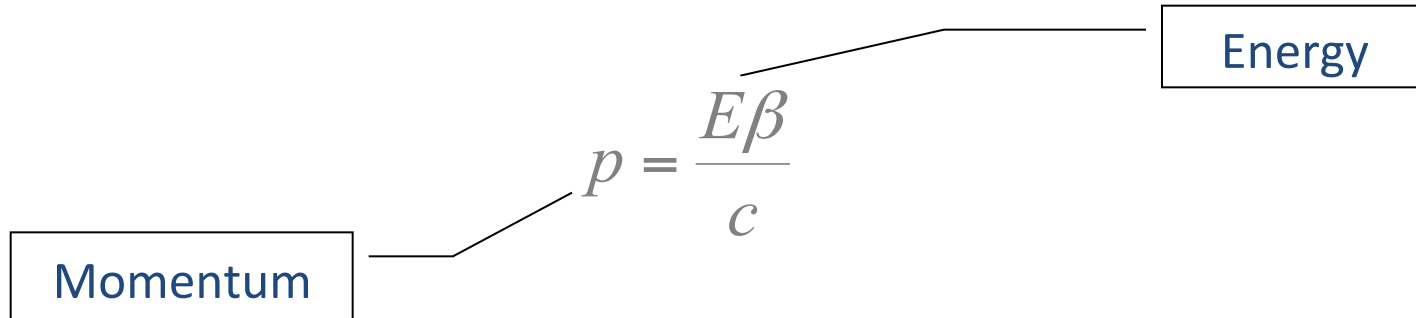
$$p = \frac{E\beta}{c}$$

Momentum

Energy

- Therefore the **units** for
  - **momentum** are: MeV/c, GeV/c, ...etc.
  - **Energy** are: MeV, GeV, ...etc.

## Attention:

when  $\beta=1$  energy and momentum are equal


when  $\beta<1$  the energy and momentum are not equal

- Kinetic energy at injection  $E_{\text{kinetic}} = 1.4 \text{ GeV}$
- Proton rest energy  $E_0 = 938.27 \text{ MeV}$
- The total energy is then:  $E = E_{\text{kinetic}} + E_0 = \underline{\underline{2.34 \text{ GeV}}}$
- We know that  $\gamma = \frac{E}{E_0}$ , which gives  $\gamma = 2.4921$
- We can derive  $\beta = \sqrt{1 - \frac{1}{\gamma^2}}$ , which gives  $\underline{\underline{\beta = 0.91597}}$
- Using  $p = \frac{E\beta}{c}$  we get  $p = \underline{\underline{2.14 \text{ GeV}/c}}$

In this case: Energy  $\neq$  Momentum



**Pure mathematics is, in its way, the poetry of logical ideas.**

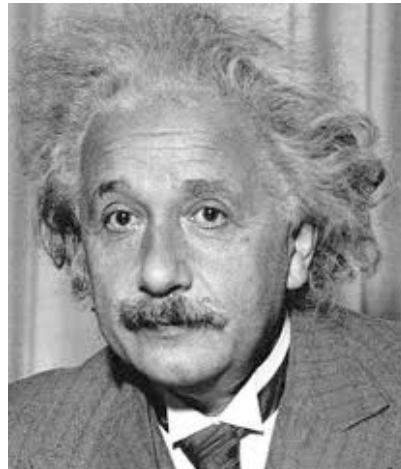

Albert Einstein