



www.cern.ch

Exploitation of LHC and Future Circular Colliders

Frédéric Bordry

Basics of Accelerator Science and Technology at CERN – Chavannes 7th February 2014

Outline

- LHC recall and 1st Run
- LS1 status

- Run 2 (from LS1 to LS2) \Rightarrow *13-14 TeV*
- LS2 and Run 3 \Rightarrow *300 fb⁻¹*

- High Luminosity LHC project \Rightarrow *3'000 fb⁻¹*

- Post-LHC machine:
 - Future Circular Colliders \Rightarrow *0.25-100 TeV*
 - *CLIC* \Rightarrow *0.25-3 TeV*


- Conclusion

LHC (Large Hadron Collider)




14 TeV proton-proton accelerator-collider built in the LEP tunnel

Lead-Lead (Lead-proton) collisions

- 1983 : First studies for the LHC project
- 1988 : First magnet model (feasibility)
- 1994 : Approval of the LHC by the CERN Council
- 1996-1999: Series production industrialisation
- 1998 : Declaration of Public Utility & Start of civil engineering
- 1998-2000: Placement of the main production contracts
- 2004 : Start of the LHC installation
- 2005-2007: Magnets Installation in the tunnel
- 2006-2008: Hardware commissioning
- 2008-2009: Beam commissioning and repair
- 2009-2030: Physics exploitation**

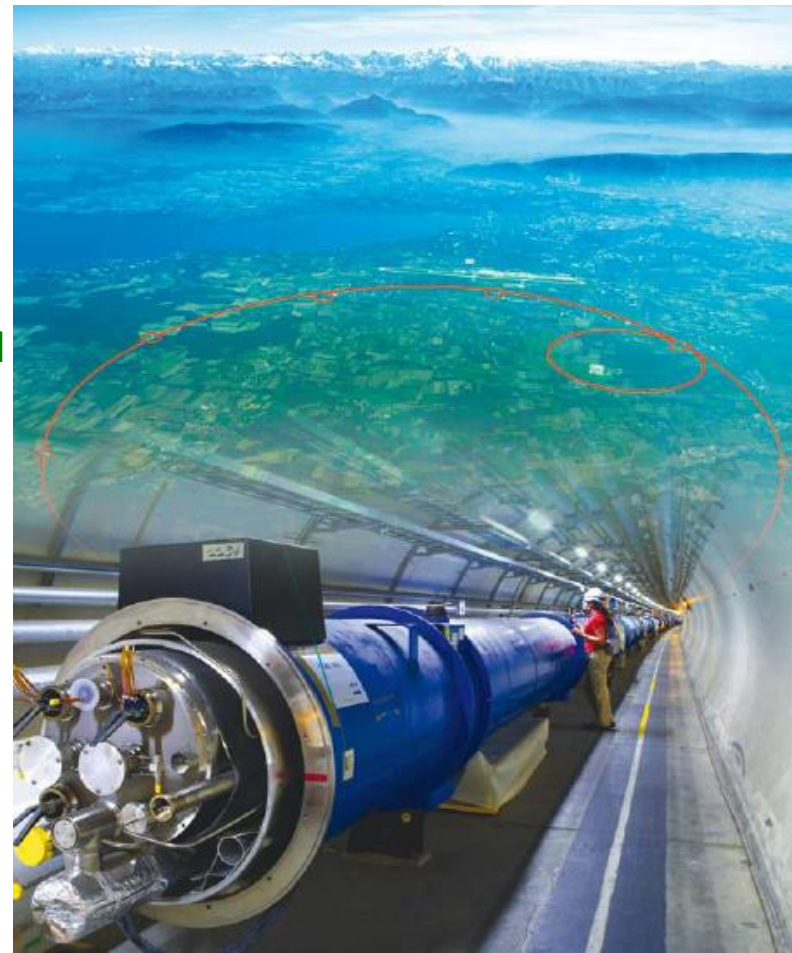

LHC, the construction timeline: Nb-Ti magnet maturation

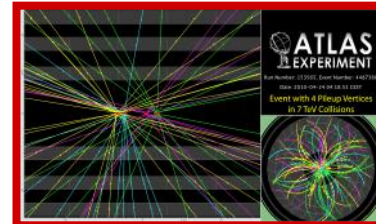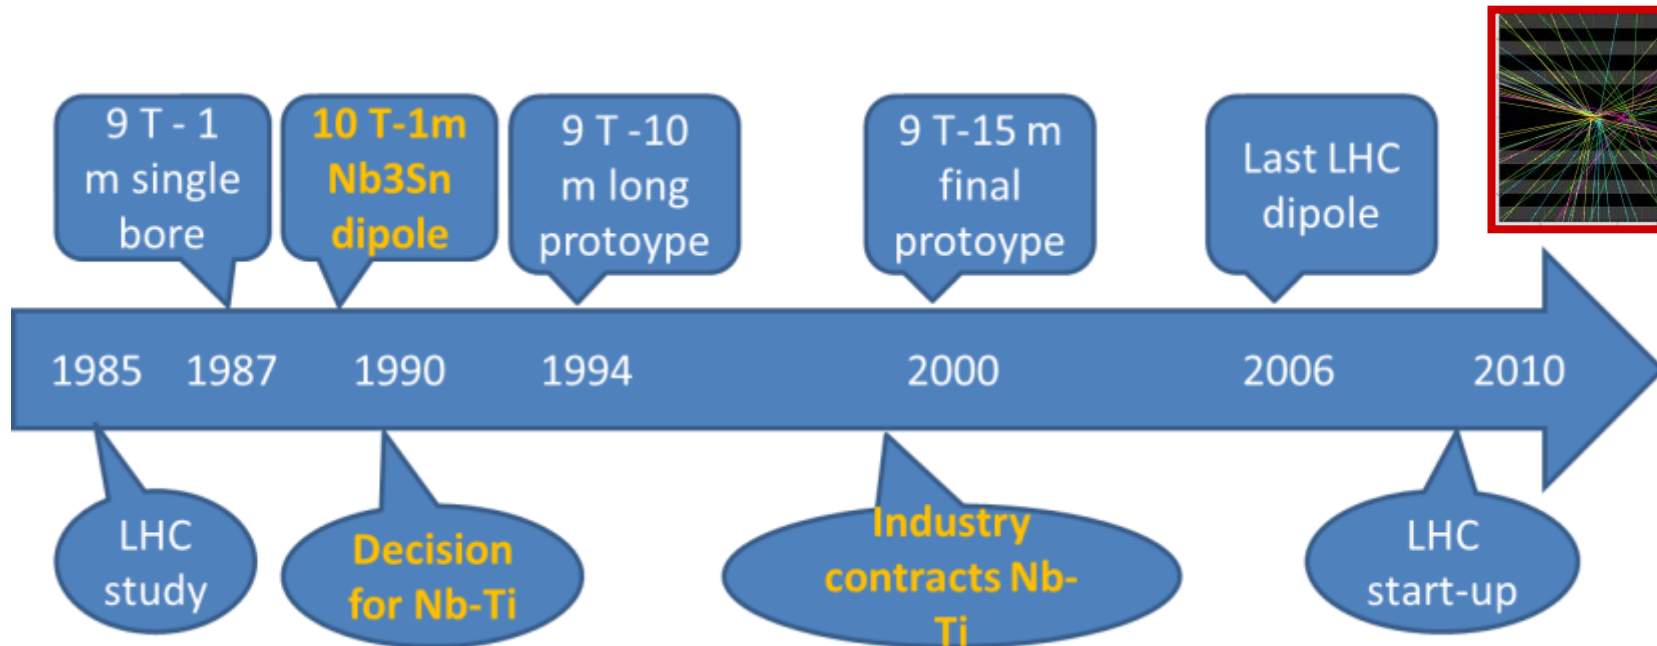


Prototype and industrialisation

LHC DIPOLE
CROSS SECTION





|B|(T)


2.652 - 2.8

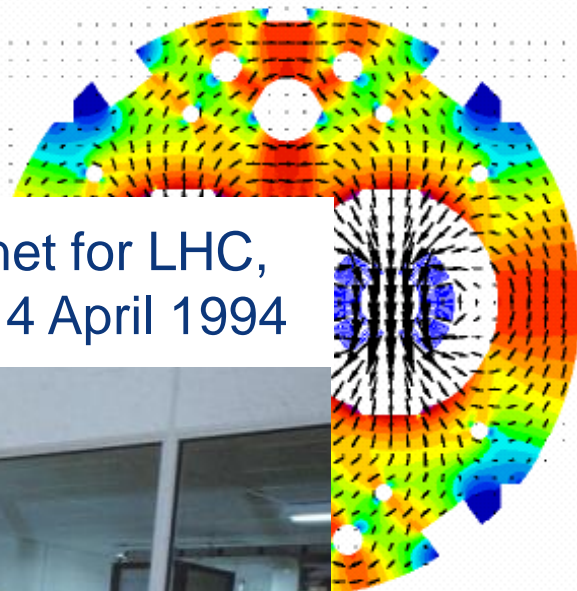


The 10 metre long prototype bending magnet for LHC, which has reached a field of 8,73 Tesla on 14 April 1994

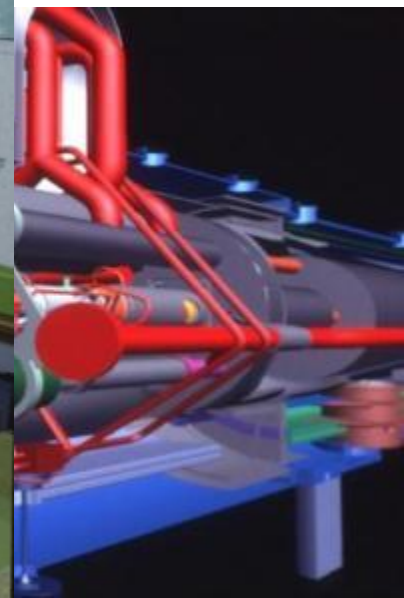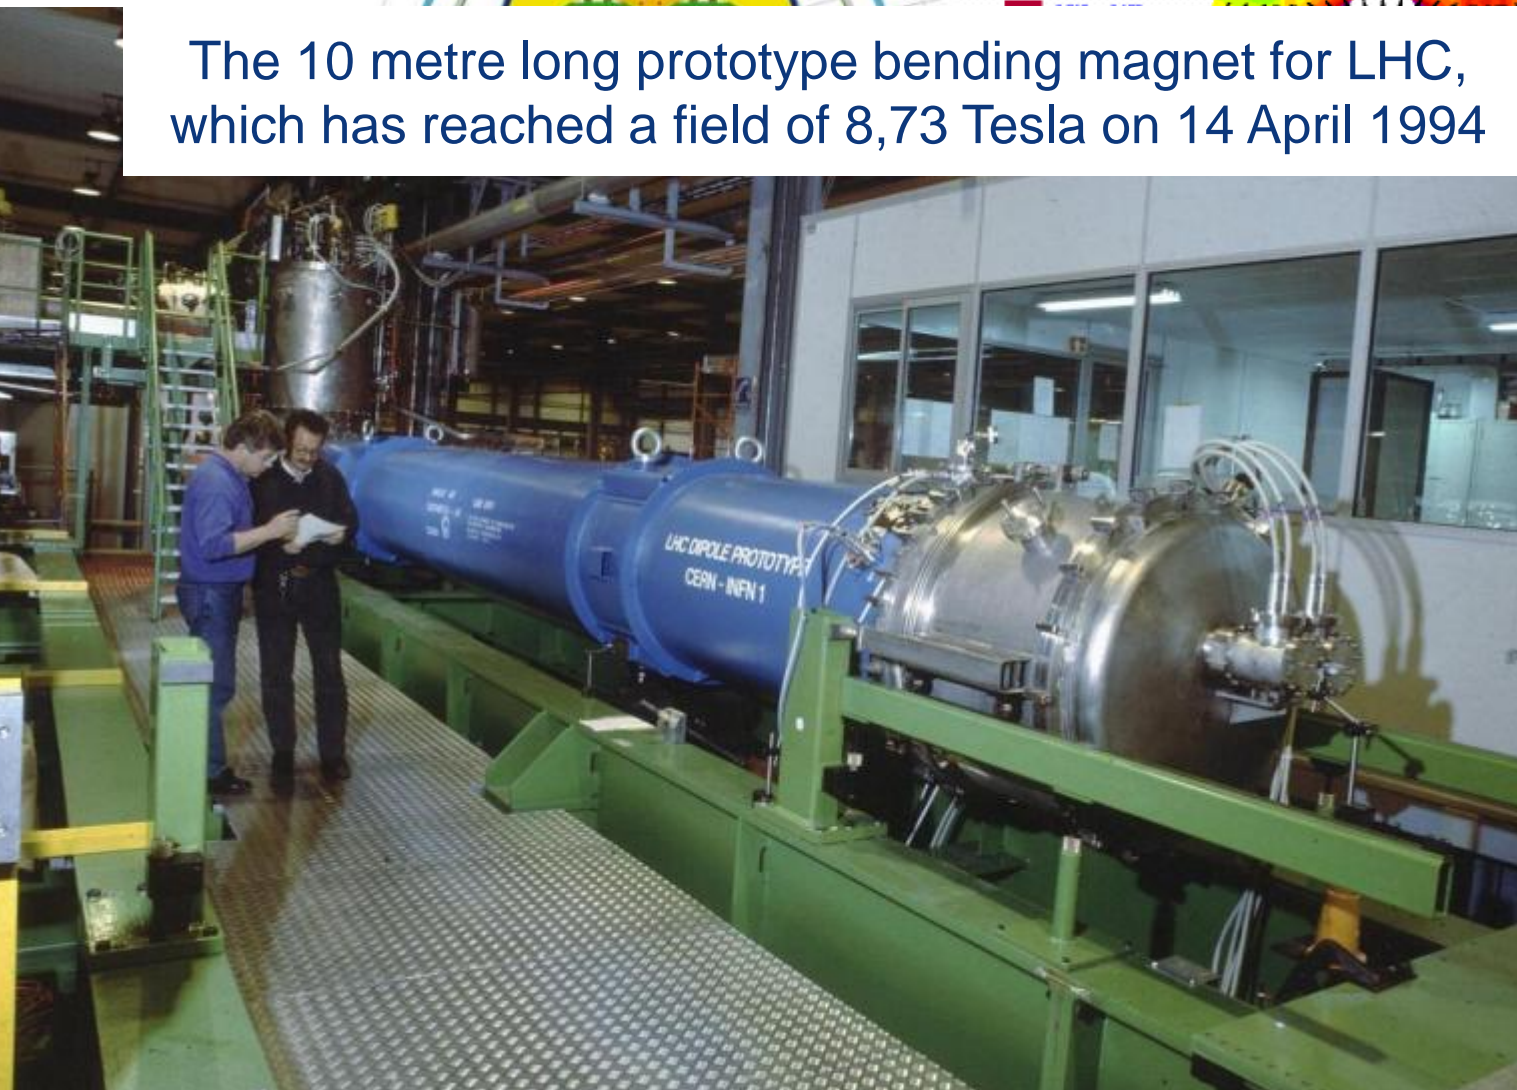


August 2008
First injection test

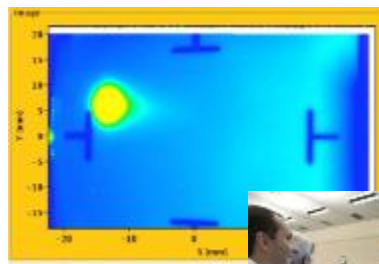

3.5 TeV

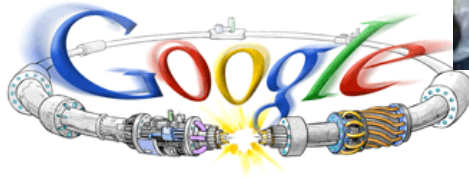

November 29, 2009
Beam back



September 10, 2008
First beams around

October 14, 2010
1e32
248 bunches

April 2010
Squeeze to 3.5 m

June 28 2011
1380 bunches

1380

6 June, 2012
6.8e33

4 July, 2012
Higgs discovery

2008

2009

2010

2011


2012

September 19, 2008
Disaster


Accidental release of 600 MJ stored in one sector of LHC dipole magnets



March 30, 2010
First collisions at



November 2010
Ions




18 June, 2012
6.6 fb⁻¹
to ATLAS & CMS



2010-2012: LHC integrated luminosity

CMS Integrated Luminosity, pp

Data included from 2010-03-30 11:21 to 2012-12-16 20:49 UTC

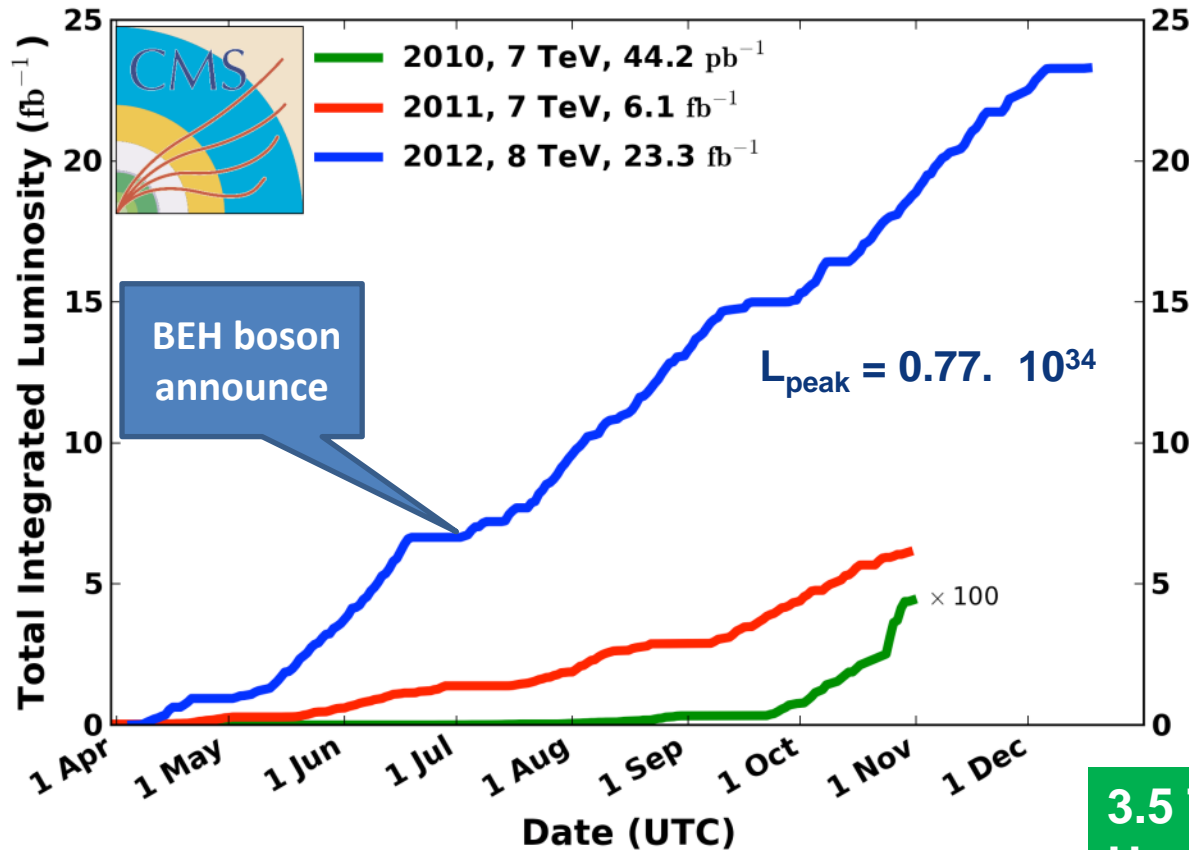

2010: **0.04 fb⁻¹**
 7 TeV CoM
 Commissioning


2011: **6.1 fb⁻¹**
 7 TeV CoM
 ... exploring limits

2012: **23.3 fb⁻¹**
 8 TeV CoM
 ... production

3.5 TeV and 4 TeV in 2012
 Up to 1380 bunches
 with $1.5 \cdot 10^{11}$ protons


Long Shutdown 1

LS1 starts as the shutdown to repair the magnet interconnects to allow nominal current in the dipole and lattice quadrupole circuits of the LHC.

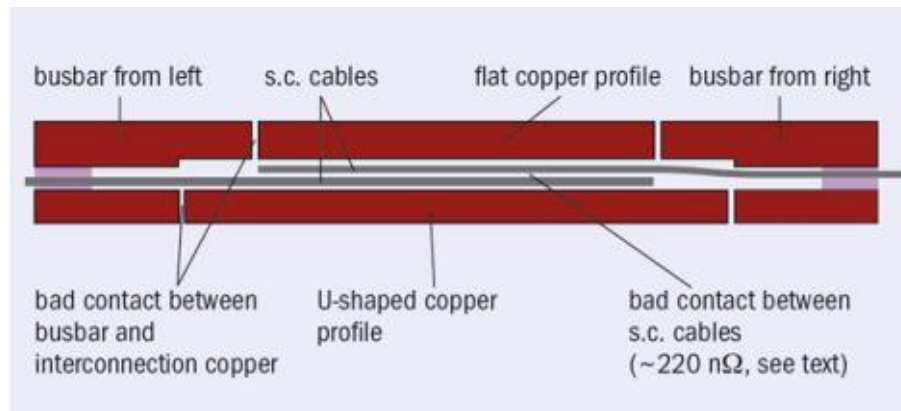

or shutdown which, in repairs, maintenance, and cabling across the and the associated

All this in the shadow interconnects.

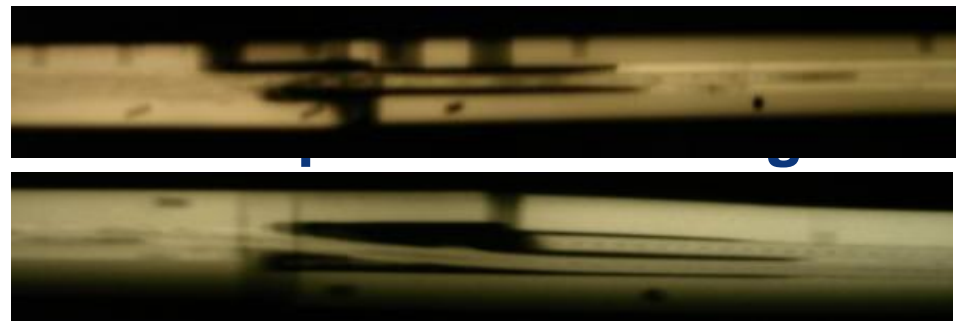

The main 2013-14 LHC consolidations

Openings: 100 %

1695 Openings and final reclosures of the interconnections

80 % done

Consolidation of the 10170 13kA splices, installing 27 000 shunts

70 % done


Installation of 5000 consolidated electrical insulation systems

50 % done

10170 orbital welding of stainless steel lines

Complete reconstruction of ~~1500~~ of these splices

3000



18 000 electrical Quality Assurance tests

10170 leak tightness tests

3 quadrupole magnets to be replaced

15 dipole magnets to be replaced

Installation of 612 pressure relief devices to bring the total to 1344


Consolidation of the 13 kA circuits in the 16 main electrical feed-boxes

Done


Done

Done

Superconducting Magnets And Circuits Consolidation Dashboards

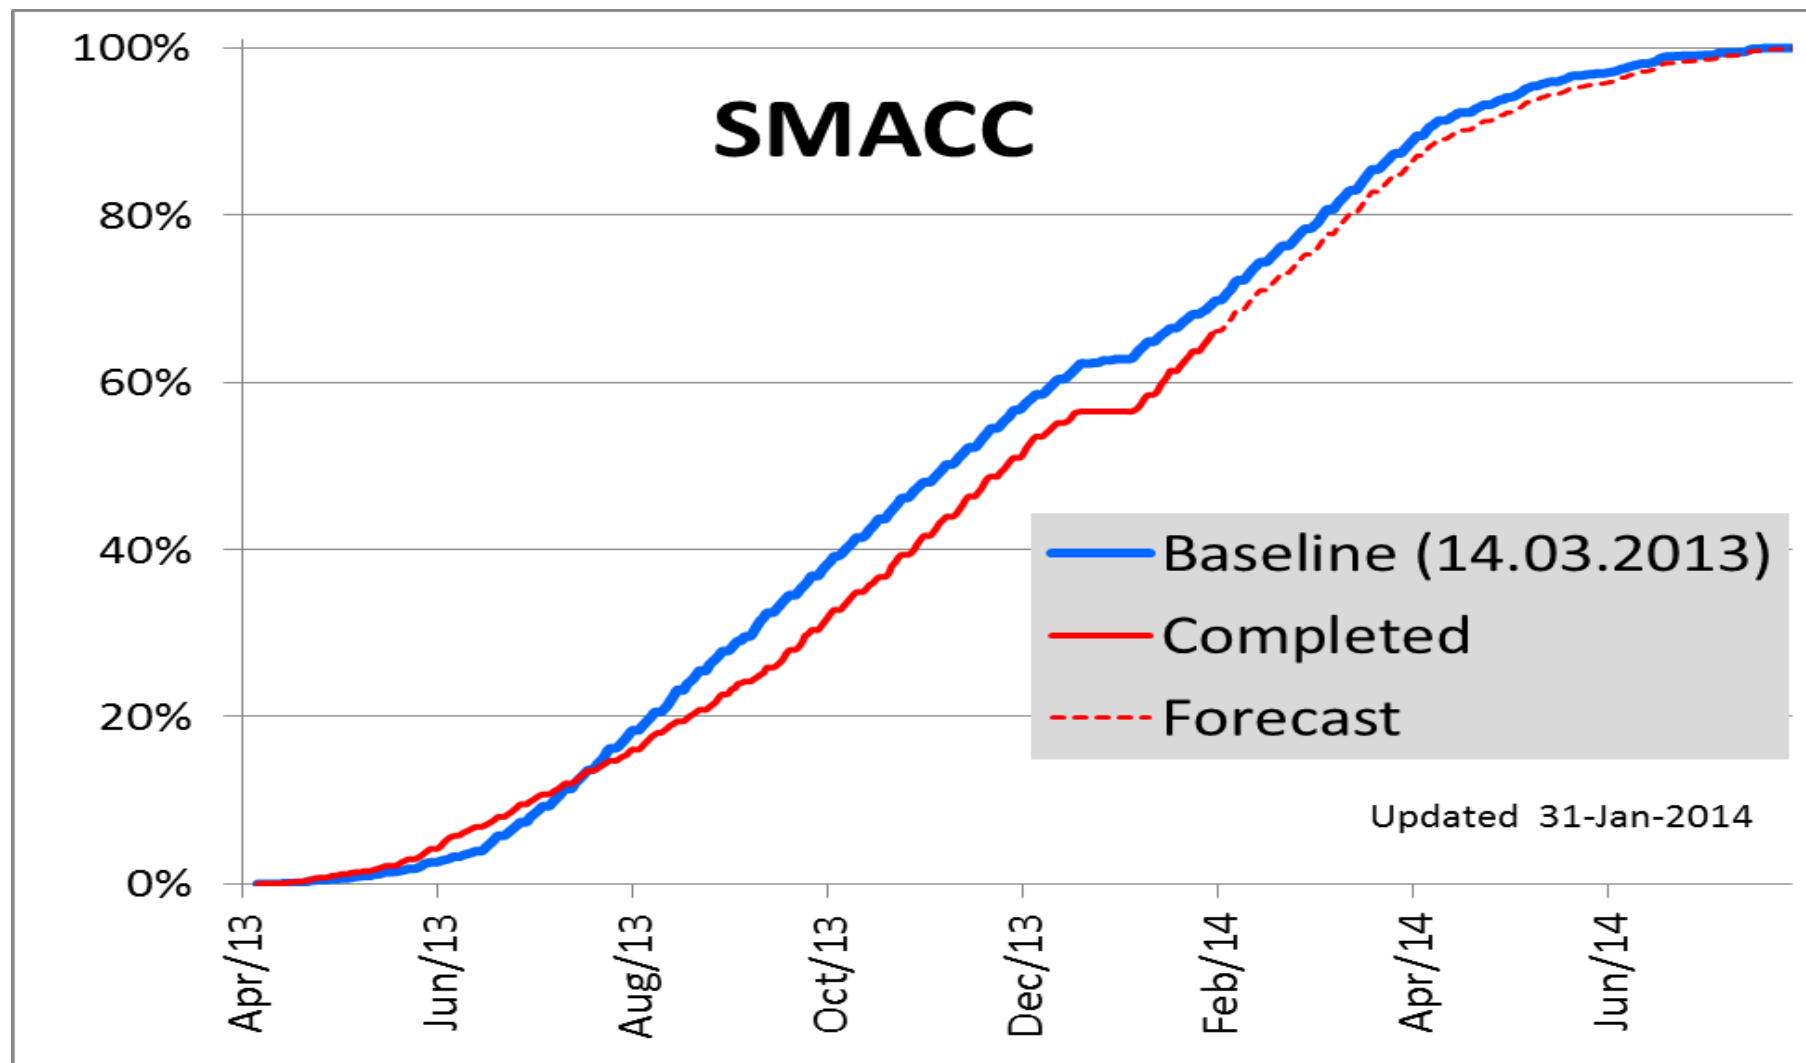

LS1: LHC schedule

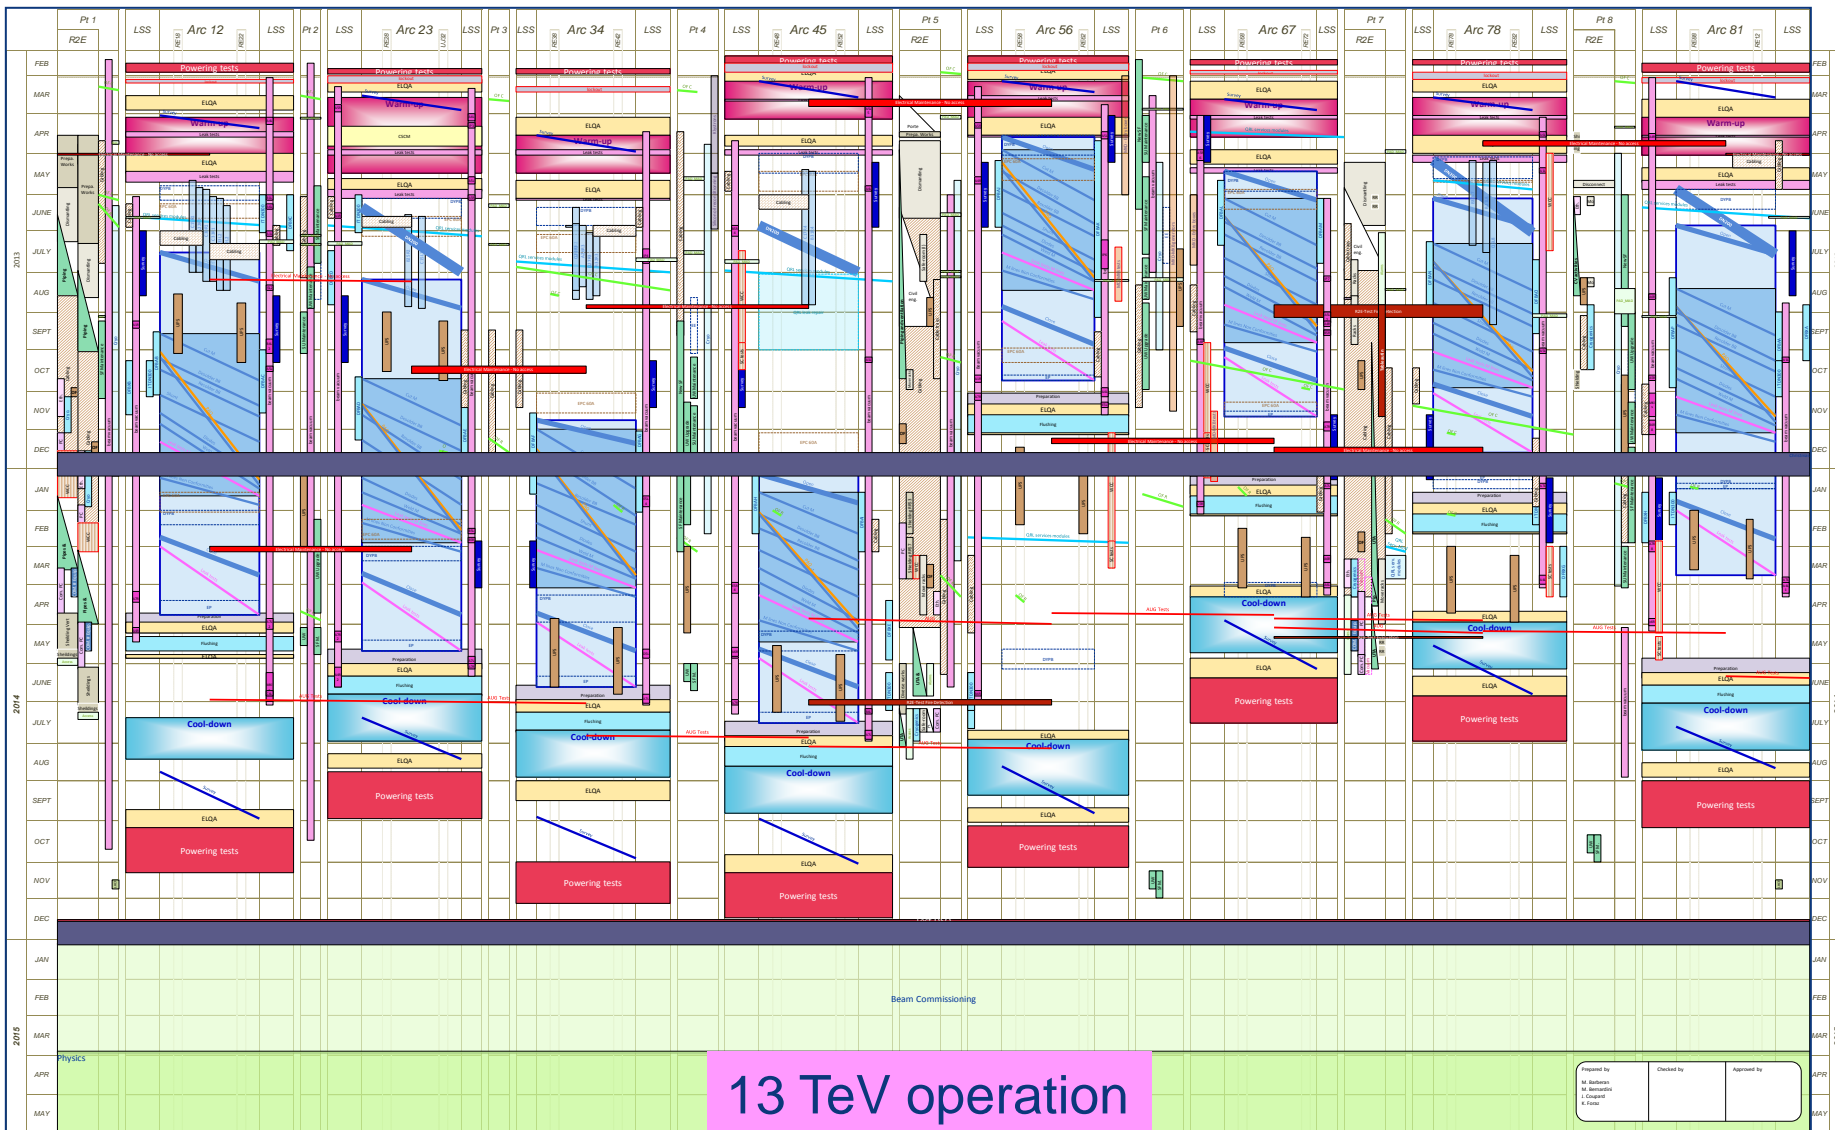


13 TeV operation


Prepared by: M. Barlow, M. Bortone, J. Couderc, A. Foffa
 Checked by:
 Approved by:
 Physics



So far, LS1 is on schedule for beams in January 2015 for LHC

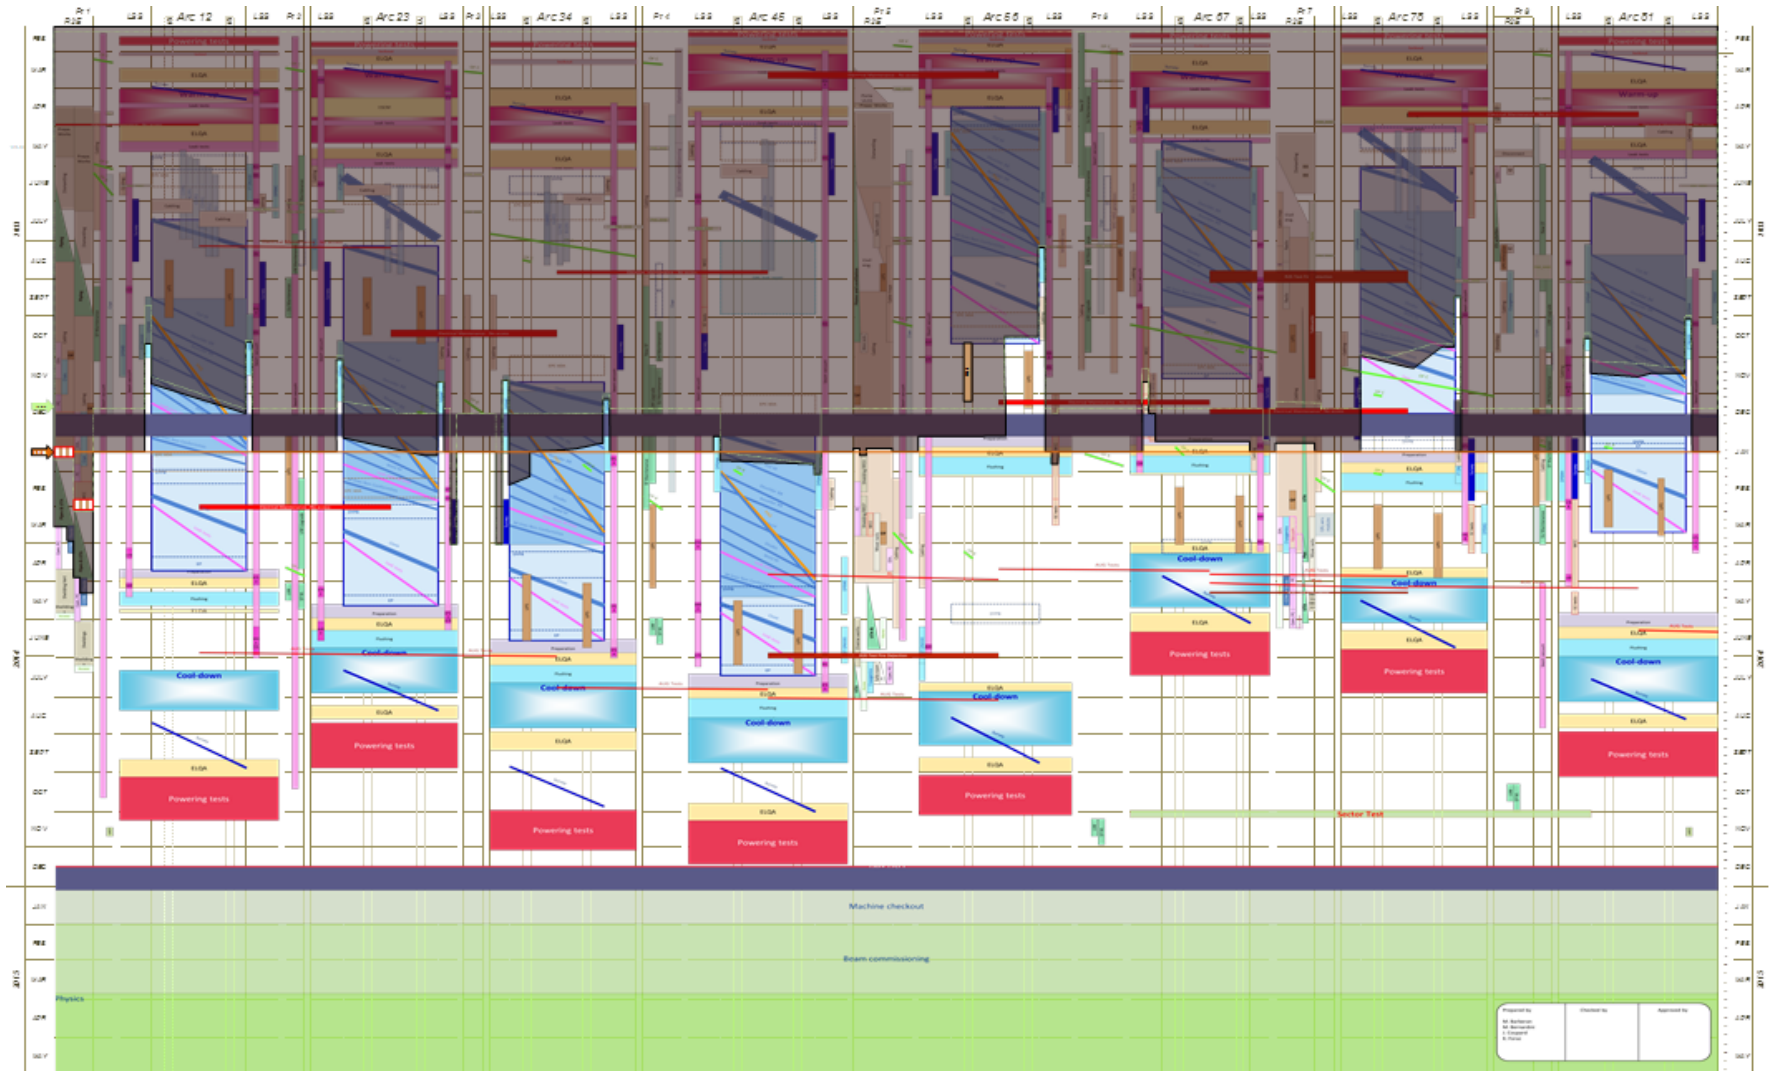


LS 1 from 16th Feb. 2013 to Dec. 2014

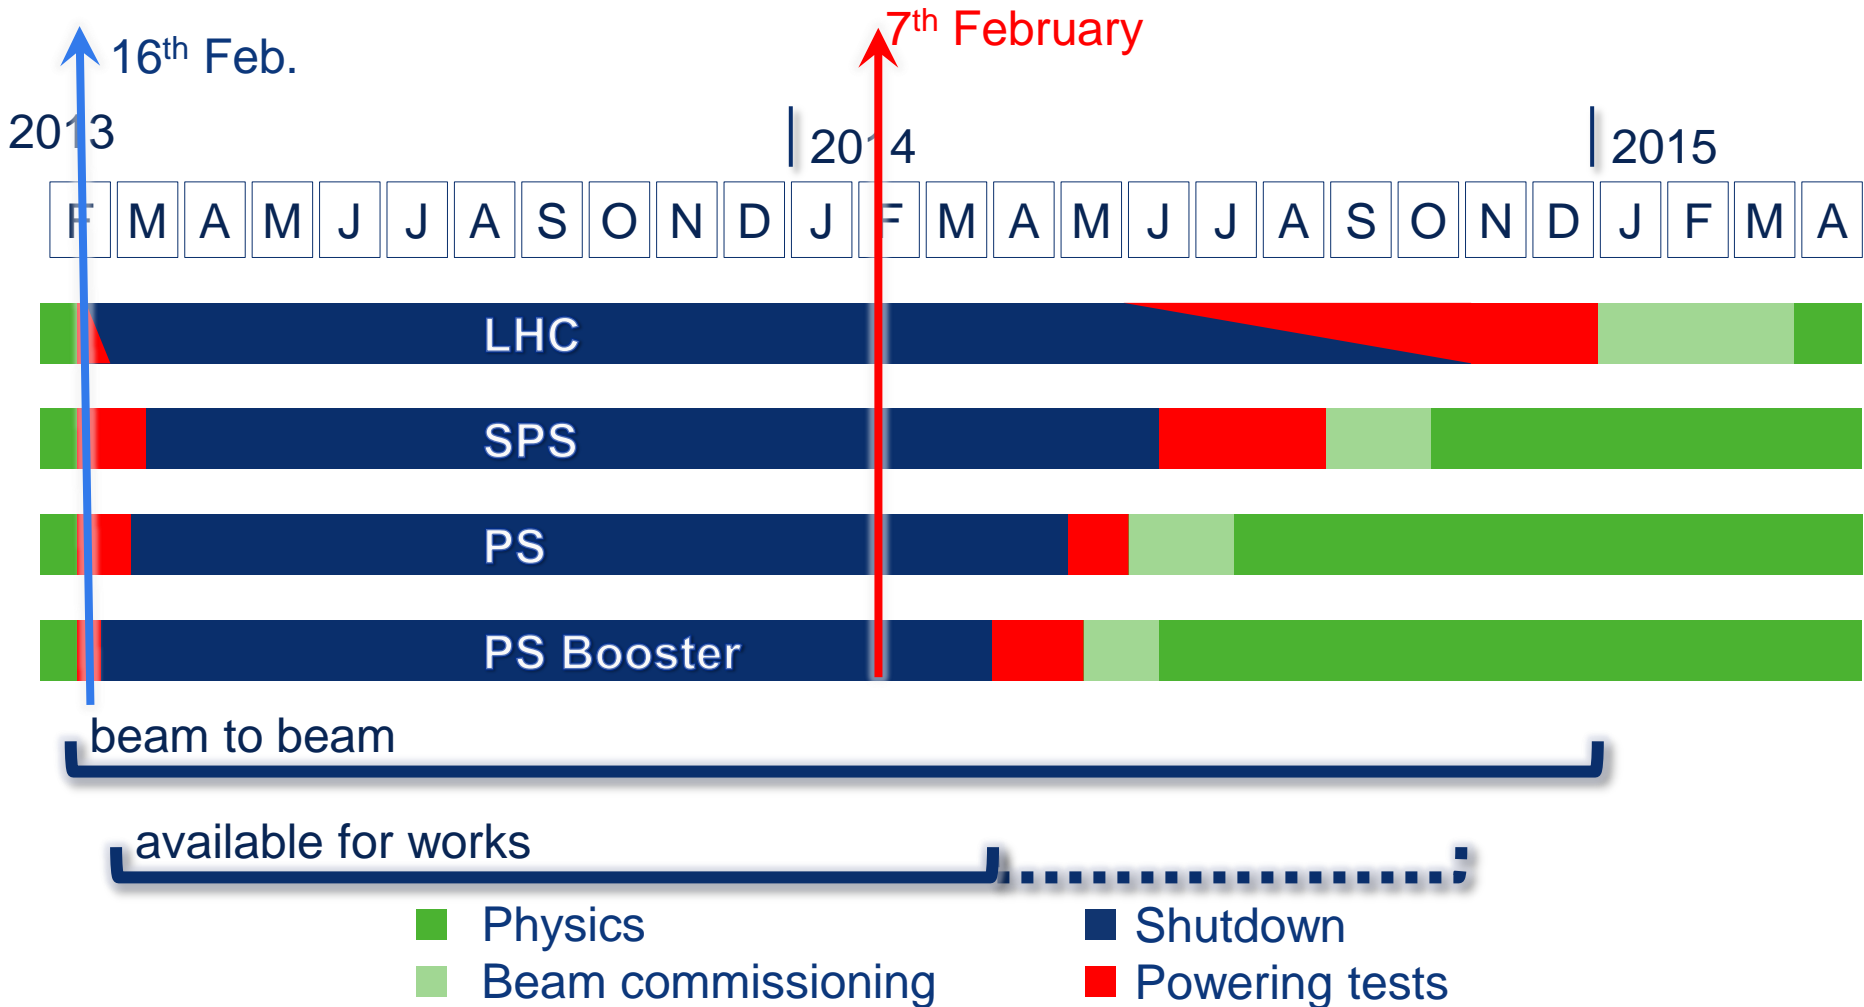


LS1: LHC Injectors status and cable status


Progress curve - PSB machine - week 3 (13/01/2014)

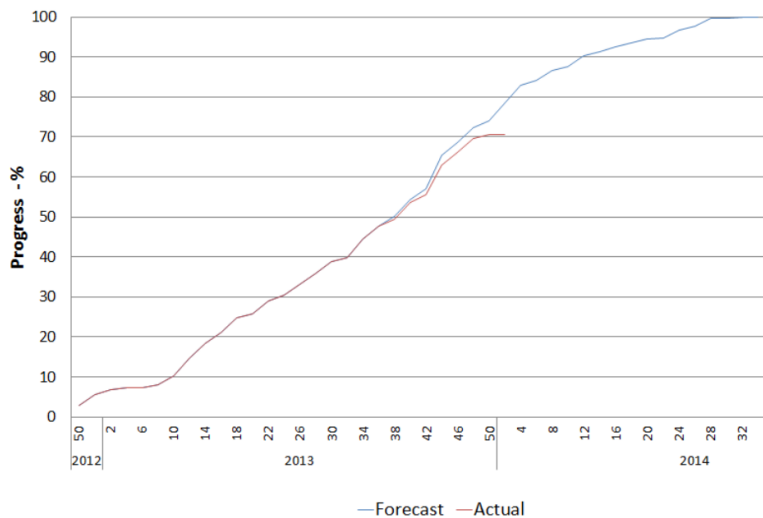


Progress curve - PS machine and TT2 line - week 03/2014

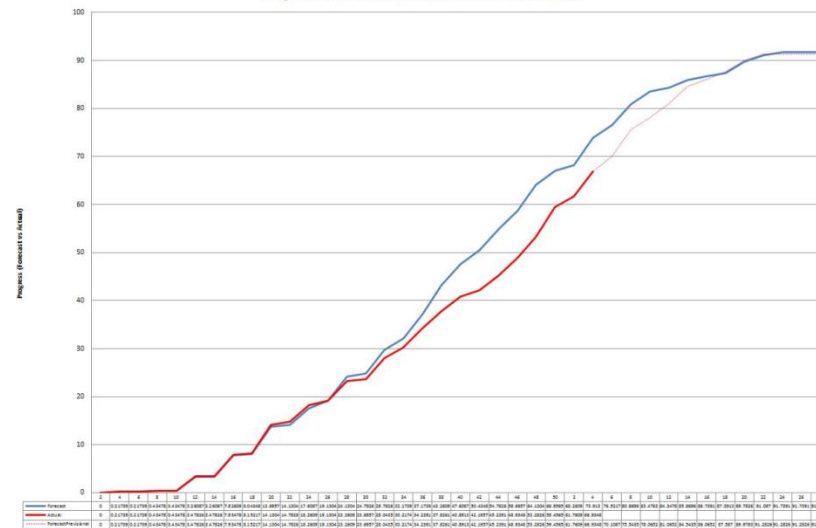



Progress curve - machine SPS - 17/01/2014

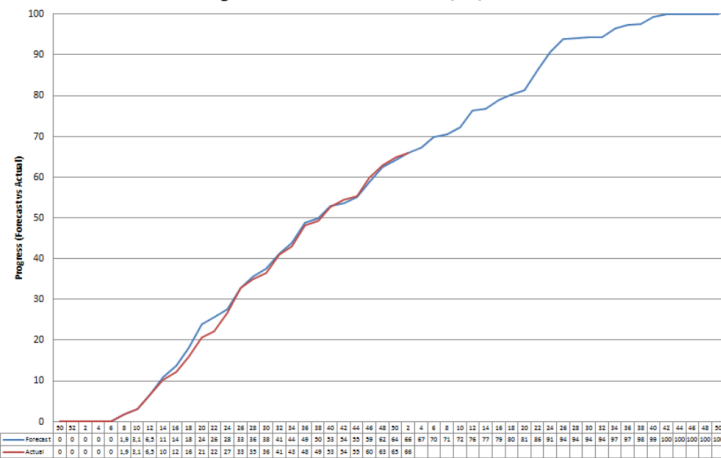

Cabling and Optical Fibre Overall Progress curve
Updated: week 3/2014

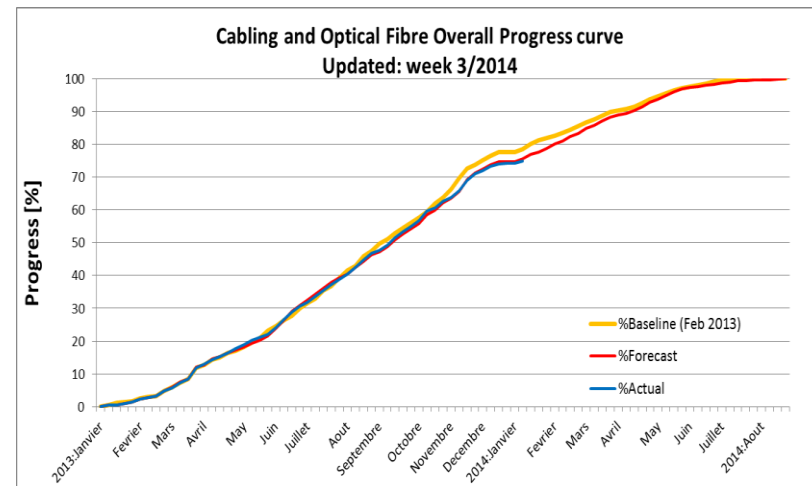

Run2: 3 years Operation Run after LS1

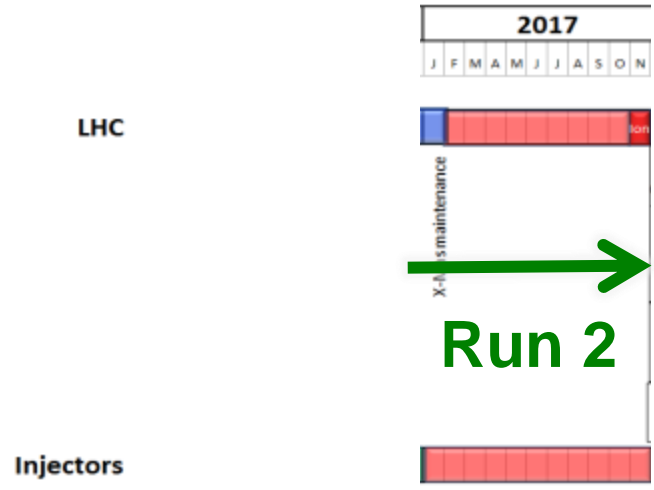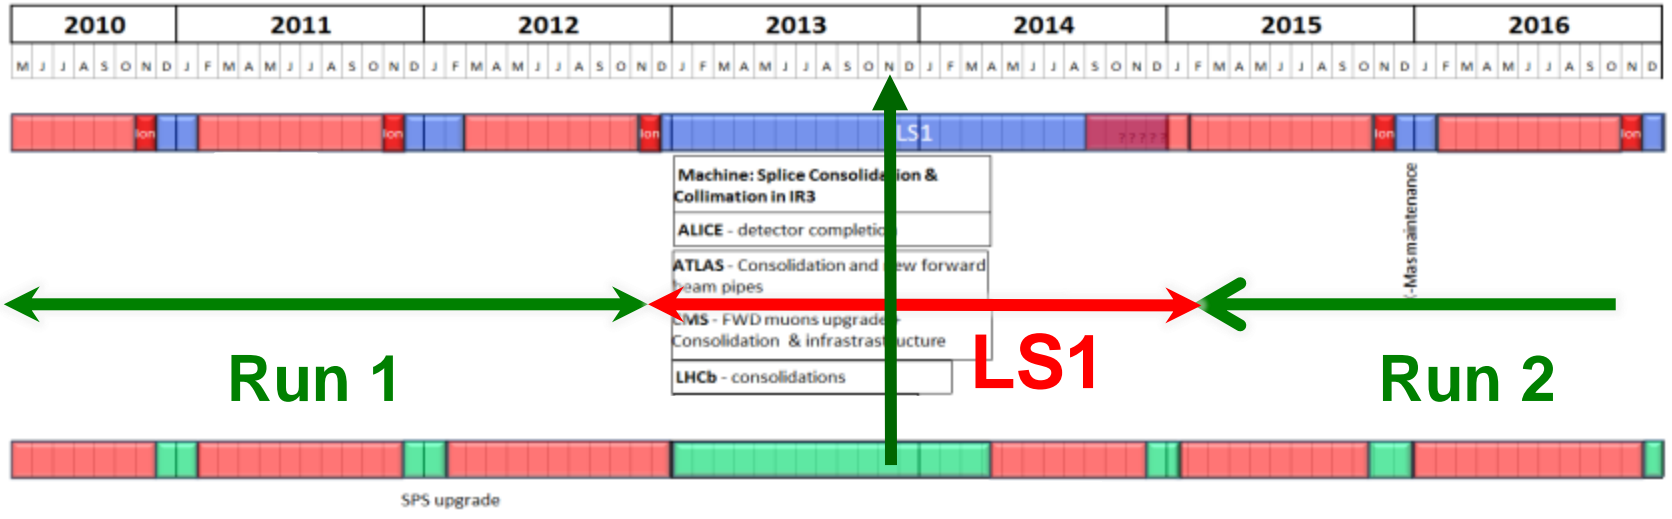


Run 2:
 Start with 6.5 TeV
 and later decision
 towards 7 TeV
 according to magnet
 training



Expectations after Long Shutdown 1 (2015)

- Collisions at least at **13 TeV** c.m.
- **25 ns** bunch spacing
Using new injector beam production scheme (BCMS), resulting in brighter beams.

Batch Compression and Merging and splitting (BCMS)

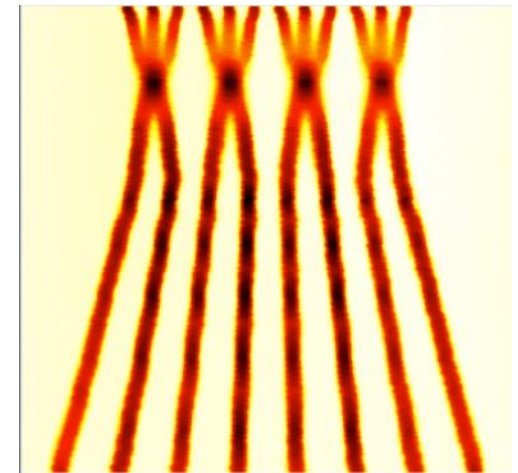

Courtesy of the LIU-PS project team

- $\beta^* \leq 0.5\text{m}$ (was 0.6 m in 2012)
- Other conditions:
 - Similar turn around time
 - Similar machine availability
- Expected maximum luminosity: **$1.6 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1} \pm 20\%$**
 - Limited by inner triplet heat load limit, due to collisions debris

	Number of bunches	Intensity per bunch	Transverse emittance	Peak luminosity	Pile up	Int. yearly luminosity
25 ns BCMS	2508	1.15×10^{11}	1.9 μm	$1.6 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$	~43	~42 fb^{-1}

Potential performance


	Number of bunches	Ib LHC [1e11]	Collimator scenario	Emit LHC (SPS) [μm]	Peak Lumi [$\text{cm}^{-2}\text{s}^{-1}$]	~Pile-up	Int. Lumi [fb^{-1}]
25 ns	2760	1.15	S1	3.5 (2.8)	9.2e33	21	24
25 ns low emit	2508	1.15	S4	1.9 (1.4)	1.6e34	43	42
50 ns	1380	1.6	S1	2.3 (1.7)	1.7e34 levelling 0.9e34	76 levelling 40	~45*
50 ns low emit	1260	1.6	S4	1.6 (1.2)	2.2e34	108	...

- 6.5 TeV
- 1.1 ns bunch length
- 150 days proton physics, HF = 0.2

All numbers approximate

* different operational model – **caveat - unproven**

“Baseline” luminosity

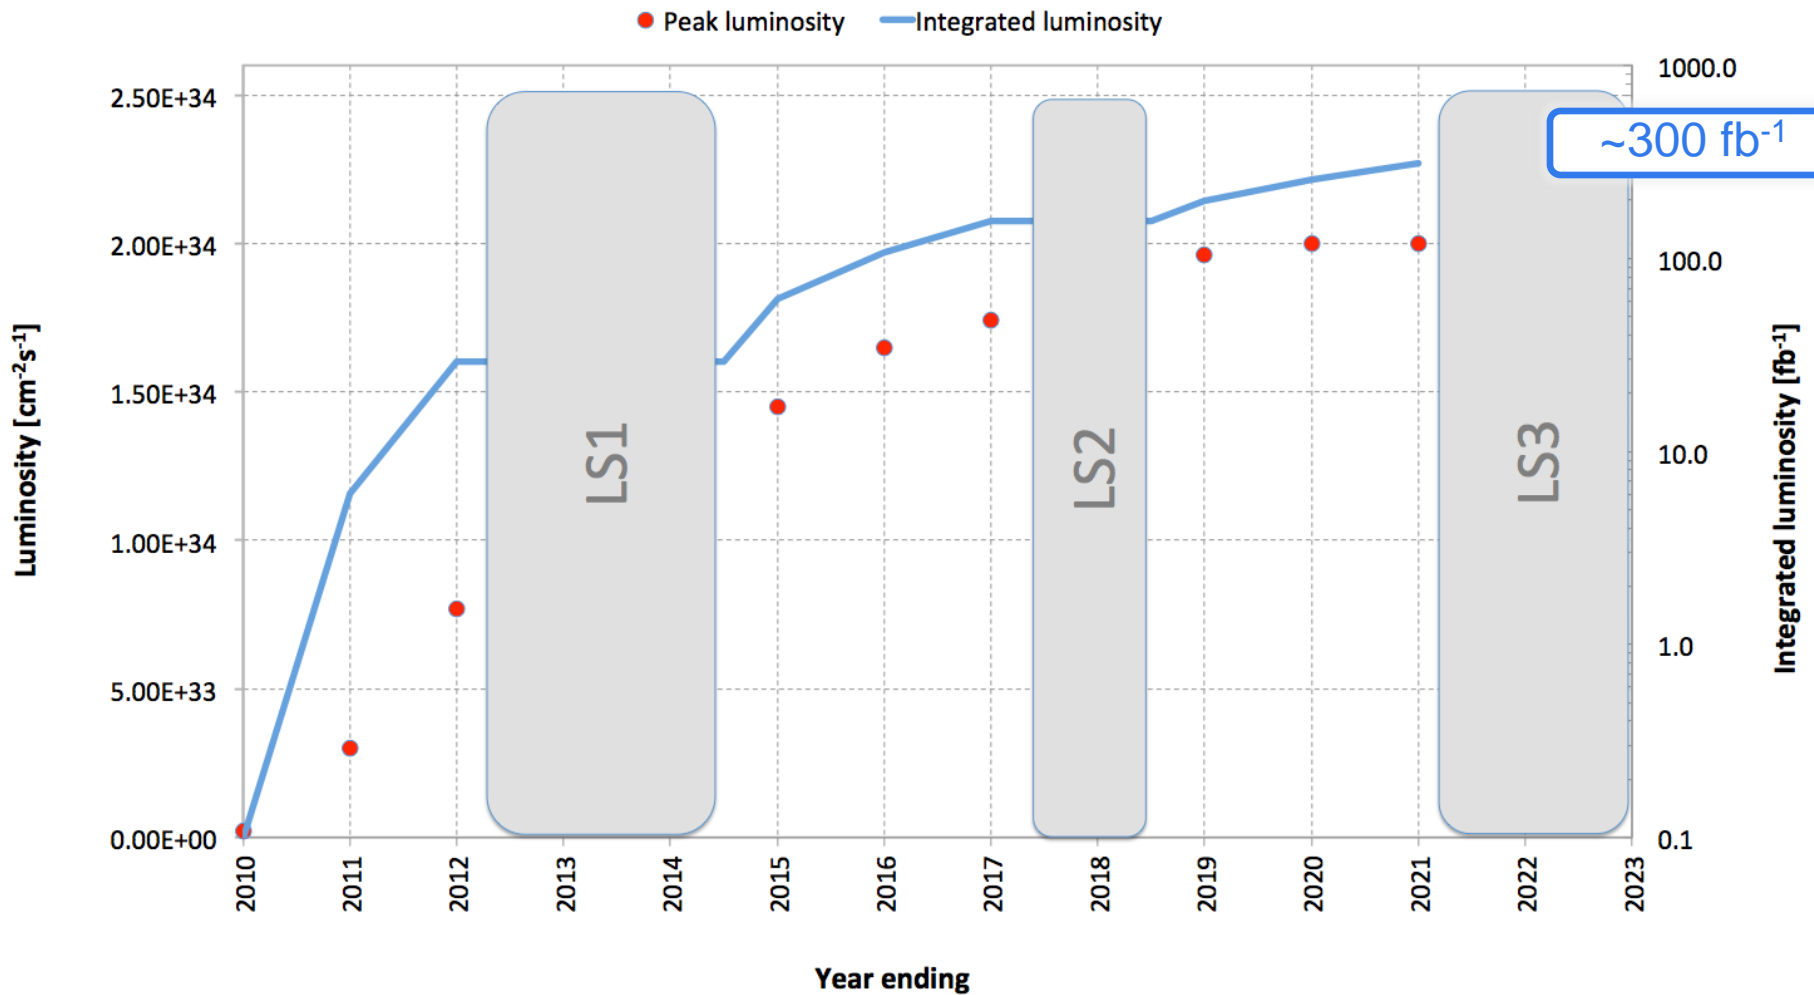





LHC schedule beyond LS1

No Linac4 connection during Run2 - only EYETS* (13+6 weeks)

LS2 starting in 2018 (July) => 18 months + 3 months BC

LS3 LHC: starting in 2023 => 30 months + 3 months BC

Injectors: in 2024 => 13 months + 3 months BC

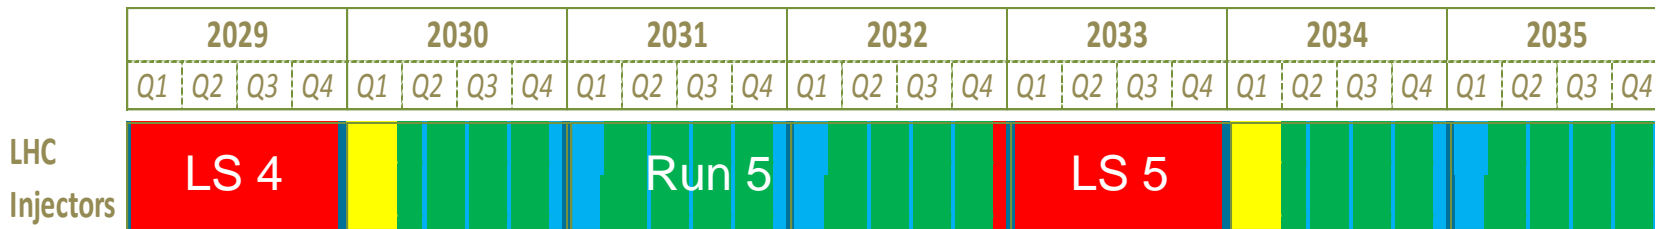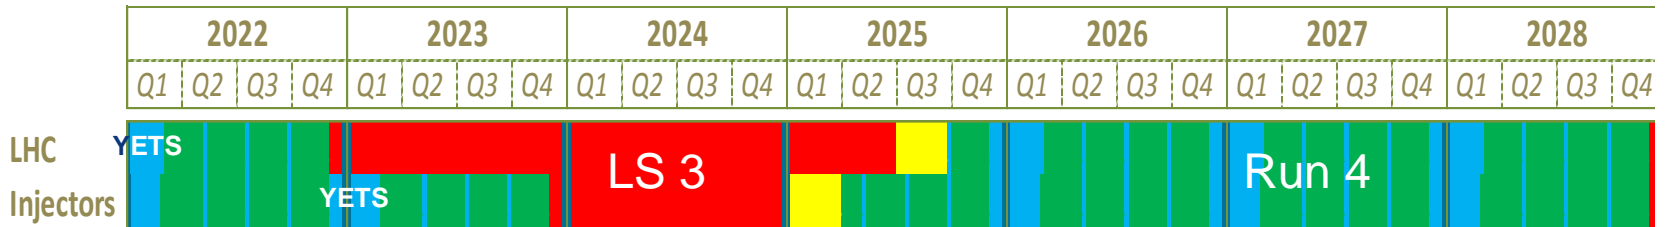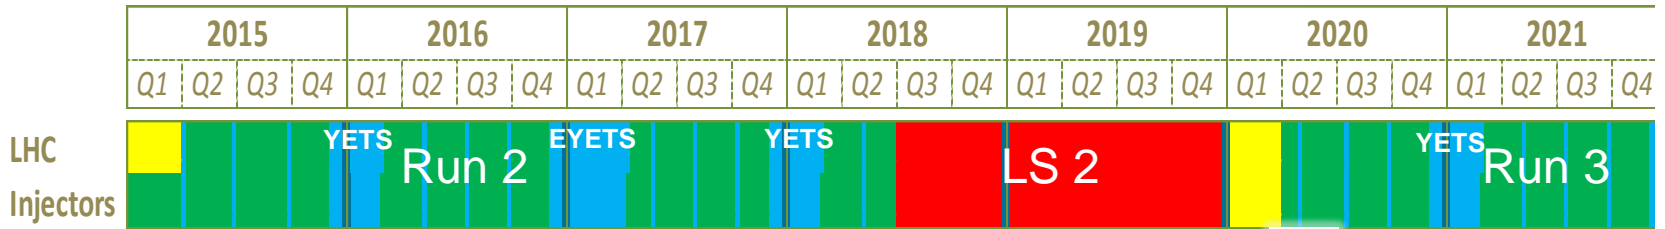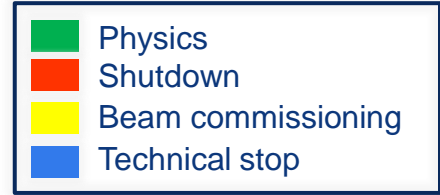

*) Extended Year End Technical Stop

LHC schedule approved by CERN management and LHC experiments spokespersons and technical coordinators

Monday 2nd December 2013



LS2 : (2018), LHC Injector Upgrades (LIU)


LINAC4 – PS Booster:

- H⁻ injection and increase of PSB injection energy from 50 MeV to 160 MeV, to increase PSB space charge threshold
- New RF cavity system, new main power converters
- Increase of extraction energy from 1.4 GeV to 2 GeV



PS:

- Increase of injection energy from 1.4 GeV to 2 GeV to increase PS space charge threshold
- Transverse resonance compensation
- New RF Longitudinal feedback system
- New RF beam manipulation scheme to increase beam brightness

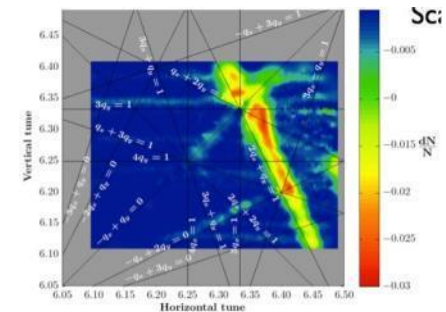


SPS

- Electron Cloud mitigation – strong feedback system, or coating of the vacuum system
- Impedance reduction, improved feedbacks
- Large-scale modification to the main RF system

These are only the main modifications and this list is far from exhaustive

Project leadership: R. Garoby and M. Meddahi

Why High-Luminosity LHC ? (LS3)

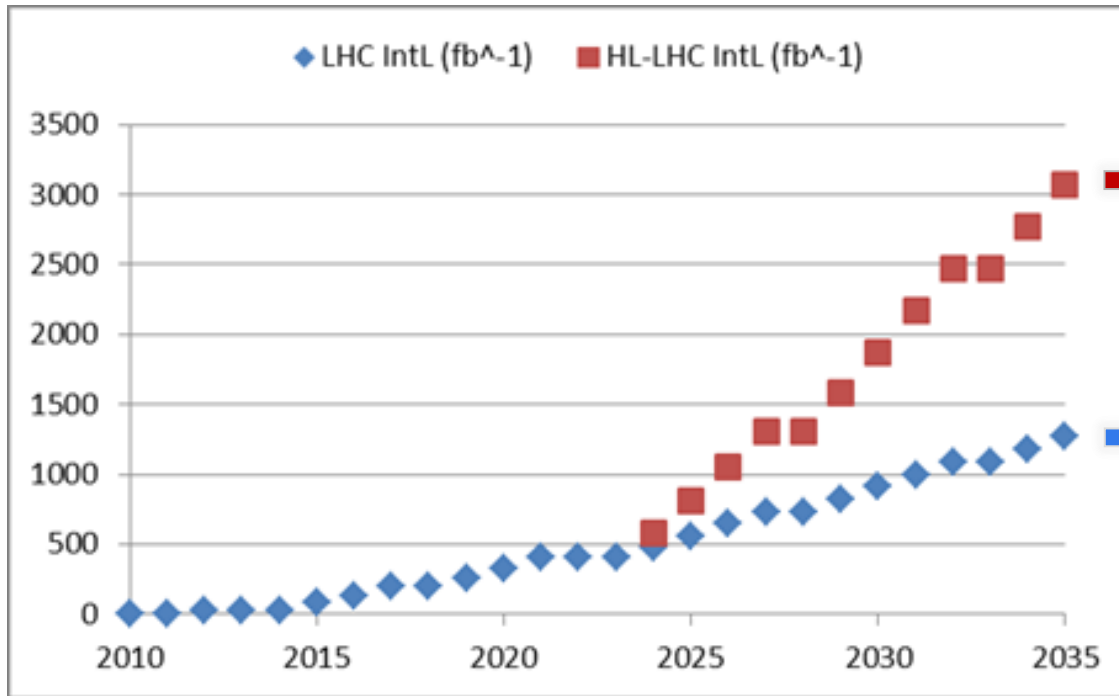

By implementing HL-LHC

Almost a factor 3

By continuous performance improvement and consolidation

Goal of HL-LHC project:

- 250 – 300 fb⁻¹ per year
- **3000 fb⁻¹ in about 10 years**

Around 300 fb⁻¹ the present Inner Triplet magnets reach the end of their useful life (due to radiation damage) and must be replaced.

c) Europe's top priority should be the **exploitation of the full potential of the LHC**, including the high-luminosity upgrade of the machine and detectors with a view to collecting **ten times more data than in the initial design, by around 2030**. This upgrade programme will also provide further exciting opportunities for the study of flavour physics and the quark-gluon plasma.


HL-LHC from a study to a PROJECT

$300 \text{ fb}^{-1} \rightarrow 3000 \text{ fb}^{-1}$

including LHC injectors upgrade **LIU**
(Linac 4, Booster 2GeV, PS and SPS upgrade)

The HL-LHC Project

HC PROJECT

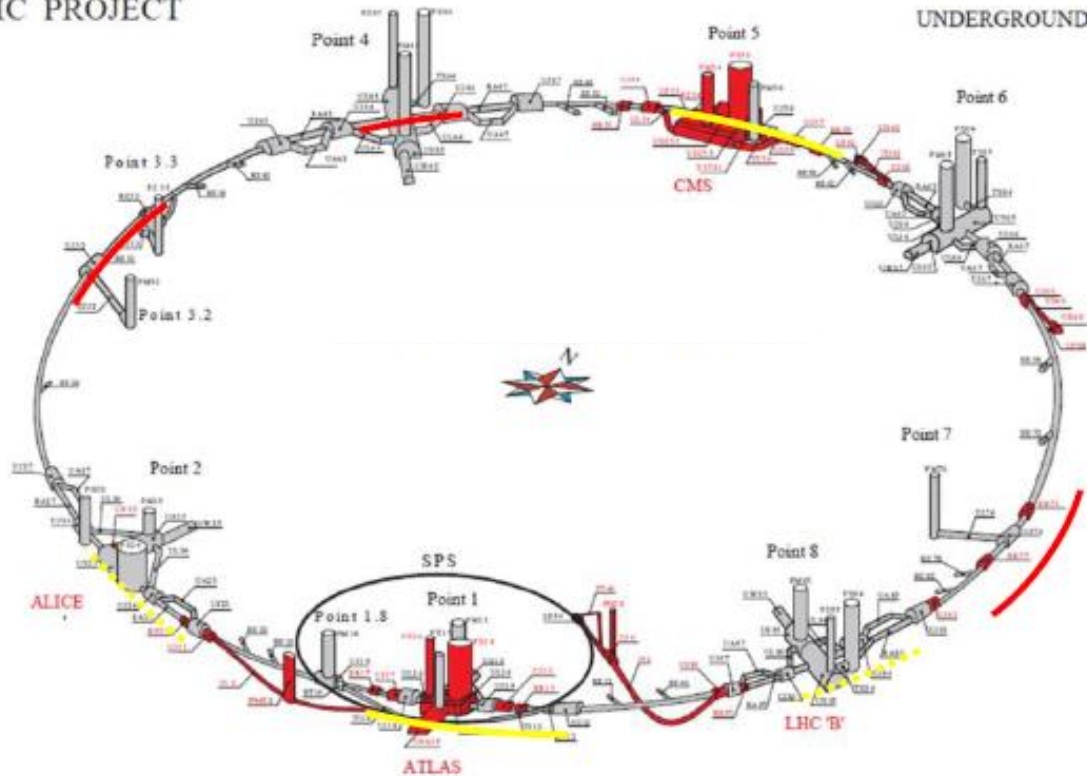

- New IR-quads Nb_3Sn (inner triplets)
- New 11 T Nb_3Sn (short) dipoles
- Collimation upgrade
- Cryogenics upgrade
- Crab Cavities
- Cold powering
- Machine protection
- ...

Major intervention on more than 1.2 km of the LHC
Project leadership: L. Rossi and O. Brüning

Squeezing the beams: High Field SC Magnets


Quads for the inner triplet

Decision 2012 for low- β quads

Aperture \varnothing 150 mm – 140 T/m

($B_{\text{peak}} \approx 12.3$ T)

(LHC: 8 T, 70 mm)




More focus strength,

β^* as low as 15 cm (55 cm in LHC)

thanks to ATS (Achromatic Telescopic Squeeze) optics


In some scheme even β^ down to 7.5 cm are considered*

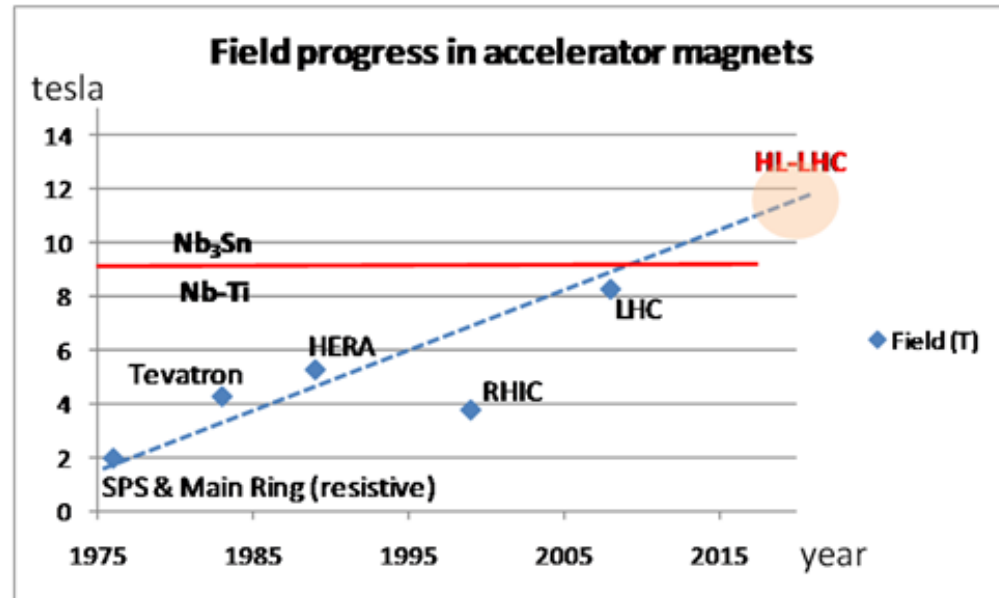


- Dipoles for beam recombination/separation capable of 6-8 T with 150-180 mm aperture (LHC: 1.8 T, 70 mm)
- Dipoles 11 T for LS2 (see later)

The « new » material : Nb₃Sn

- Recent 23.4 T (1 GHz) NMR Magnet for spectroscopy in Nb₃Sn (and Nb-Ti).
- 15-20 tons/year for NMR and HF solenoids. Experimental MRI is taking off
- ITER: 500 tons in 2010-2015!
It is comparable to LHC (1200 tons of Nb-Ti but HL-LHC will require only 20 tons of Nb₃Sn)
- **HEP ITD (Internal Tin Diffusion):**
 - High Jc., 3xJc ITER
 - Large filament (50 μm), large coupling current...
 - Cost is 5 times LHC Nb-Ti

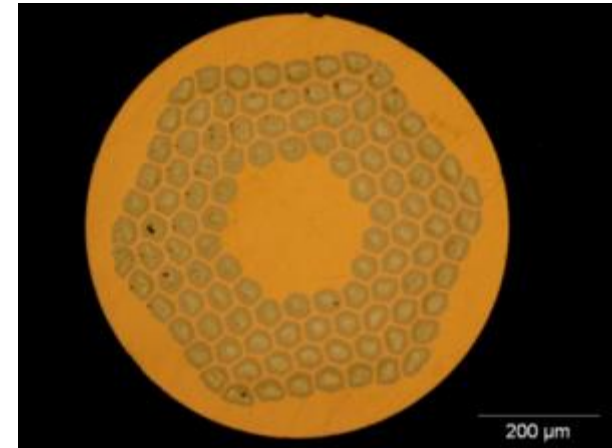


0.7 mm, 108/127 stack RRP from **Oxford OST**

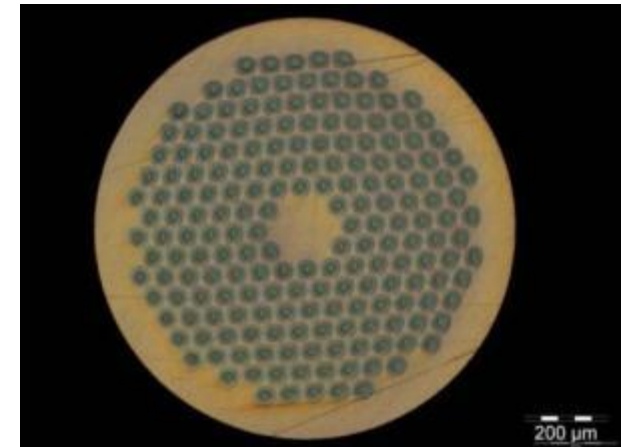

1 mm, 192 tubes PIT from **Bruker EAS**



LARP (US LHC program) Magnets

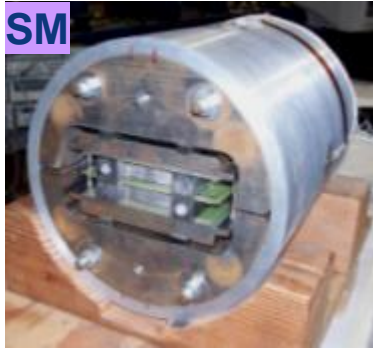

SM




SQ



TQS




LQS-4m

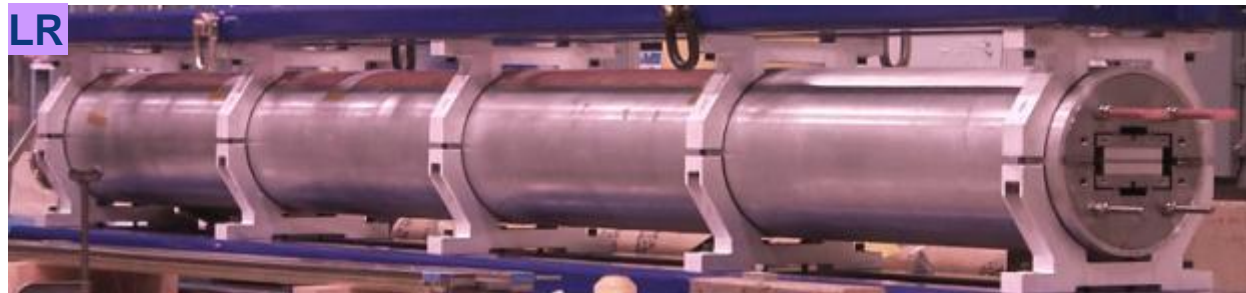

LR




TQC

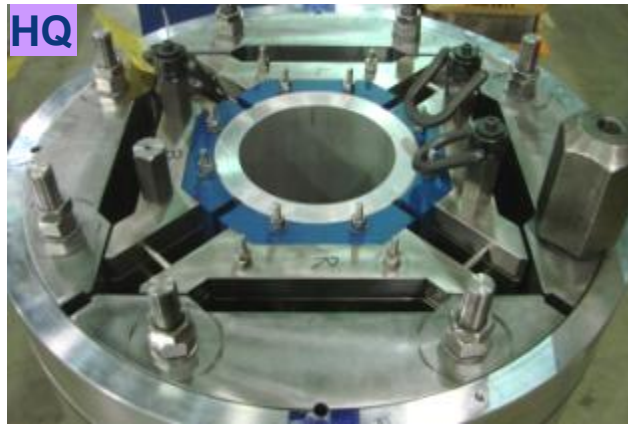

HQ

LQS of LARP

Courtesy: G. Ambrosio FNAL
and G. Sabbi, LBNL

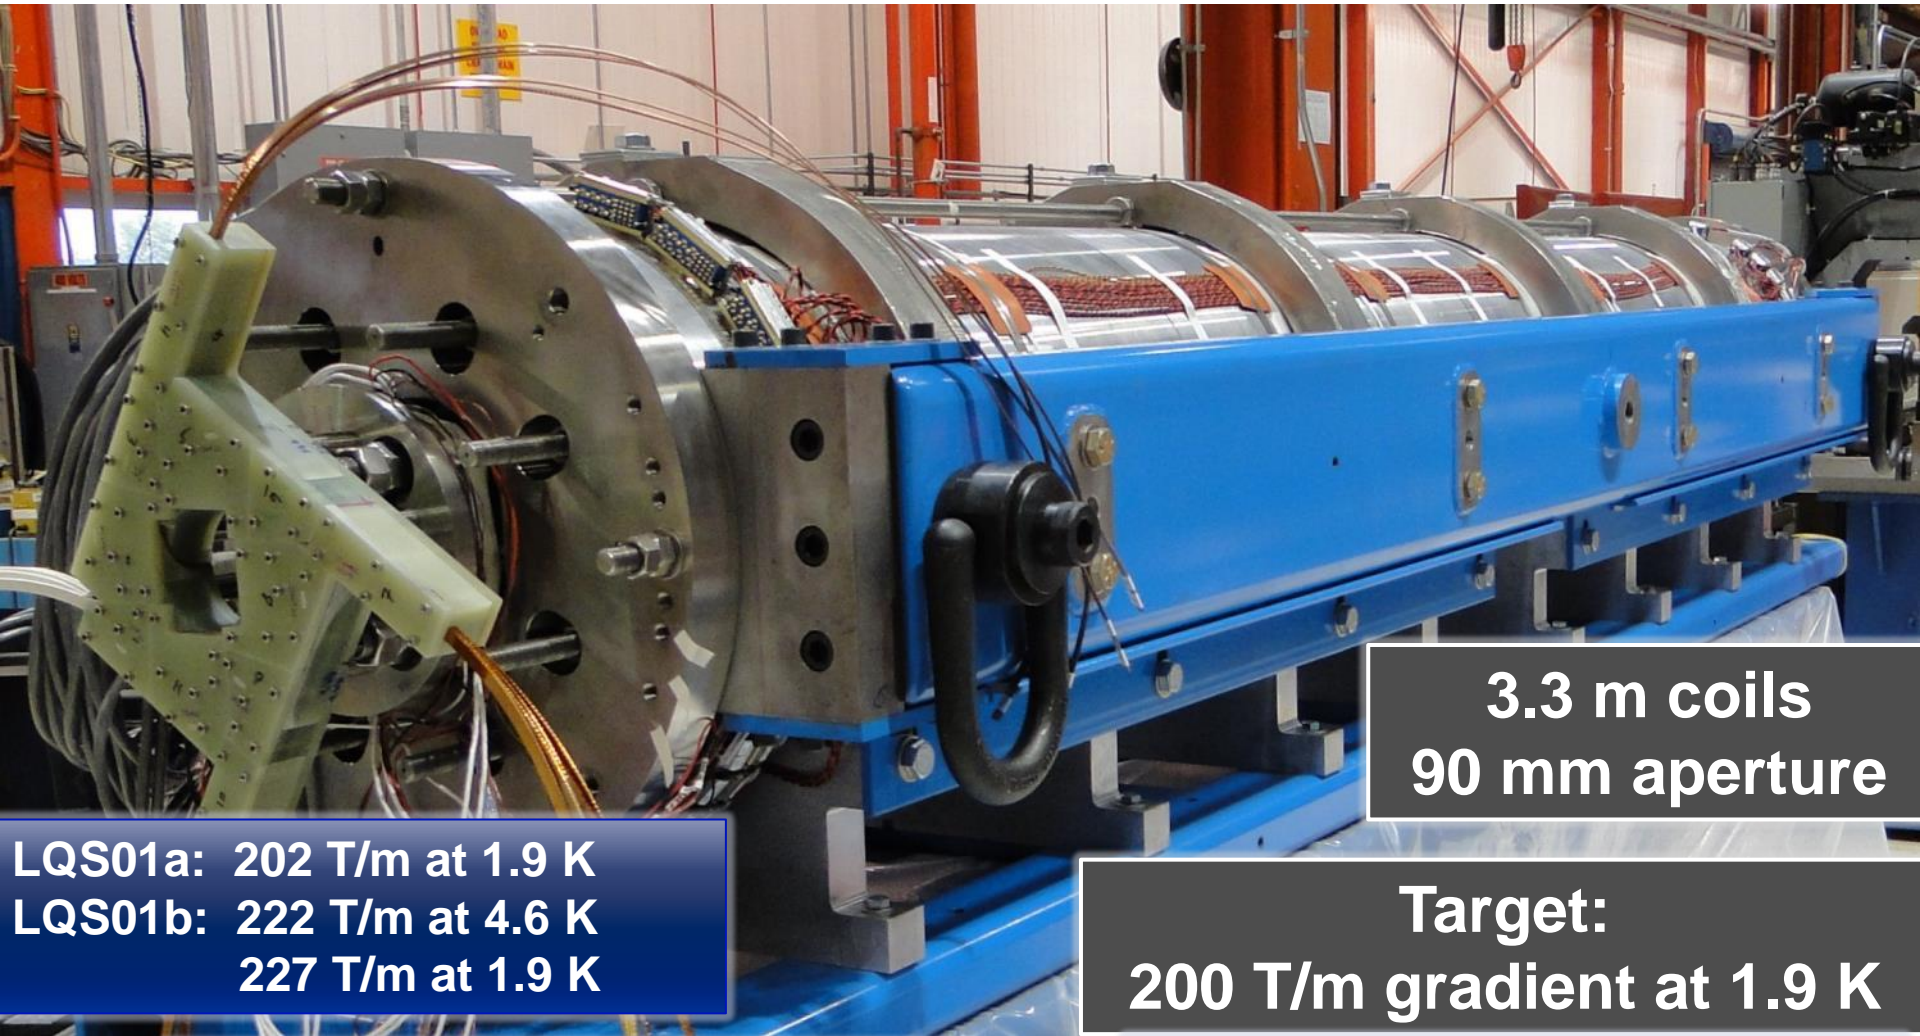

**3.3 m coils
90 mm aperture**

**LQS01a: 202 T/m at 1.9 K
LQS01b: 222 T/m at 4.6 K
227 T/m at 1.9 K**

**Target:
200 T/m gradient at 1.9 K**


**LQS02: 198 T/m at 4.6 K 150 A/s
208 T/m at 1.9 K 150 A/s
limited by one coil**

**LQS03: 208 T/m at 4.6 K
210 T/m at 1.9 K
1st quench: 86% s.s. limit**



Setting up International collaboration


with national laboratories but also involving industrial firms

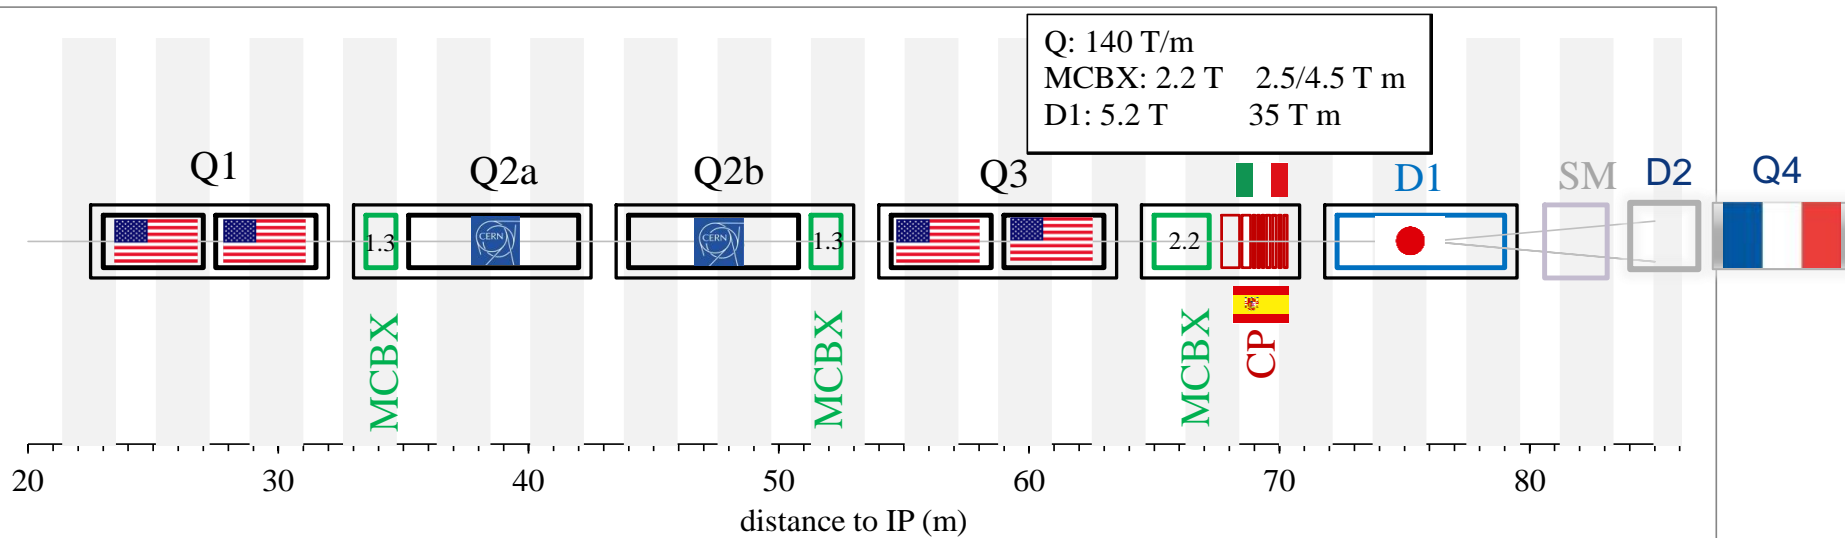

Baseline layout of HL-LHC IR region

LS2 : collimators and 11T Dipole

- LS2 2017-18: Point-~~X~~,7 & IR-2
- LS3 2020+: IR1,5 as part of HL-LHC

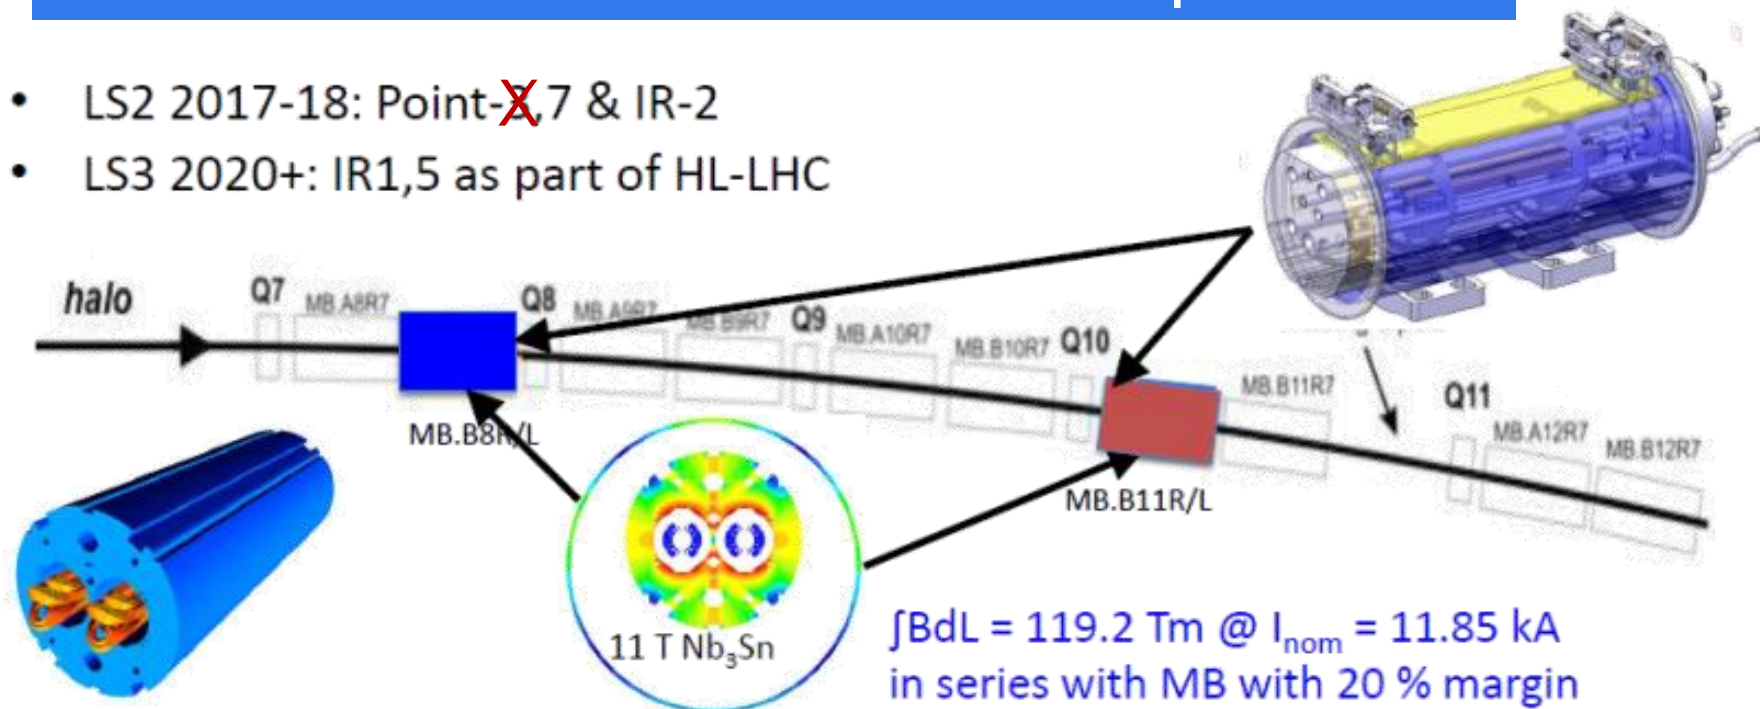


LS2: 12 coldmass + 2 spares = 14 CM
 LS3: 8 coldmass + 2 spares = 10 CM
 Total 24 CM



LS2: 24 coldmass + 4 spares = 28 CM
 LS3: 16 coldmass + 4 spares = 20 CM
 Total 48 CM

Nb₃Sn 11T Dipole R&D

Single aperture model

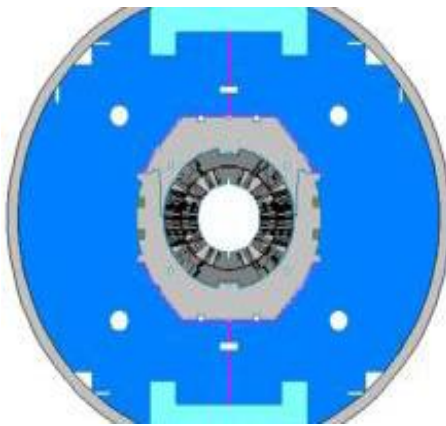


Twin aperture model

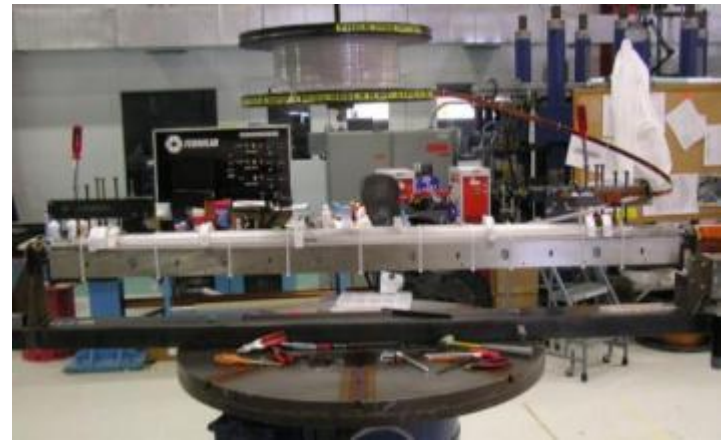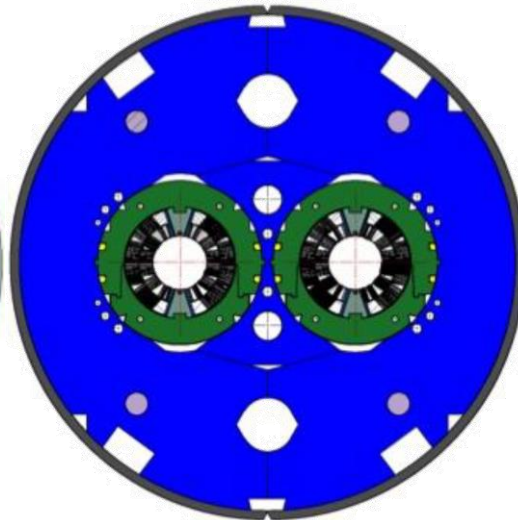

IR Collimation Upgrade

Update of present collimation system during LS1:

- Replace existing collimators
- Reduce setup time (gain of factor ~100)
- Improved monitoring

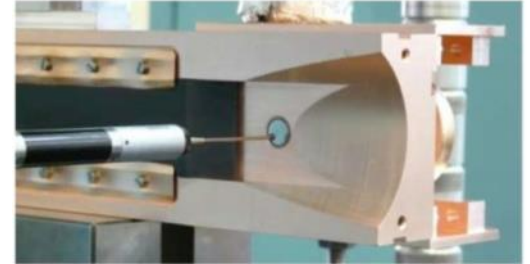


For HL-LHC add dispersion suppressor collimation

- Eliminate off-momentum particles in a region with high dispersion
- Technology of choice for the DS collimators is warm with bypass cryostat
- **low impedance collimators: coating with Molybdenum**
- Design completed with 4.5 m integration length.
- Prototyping on-going

Crab Cavities, Increase “Head on”

Aim: reduce the effect of the crossing angle

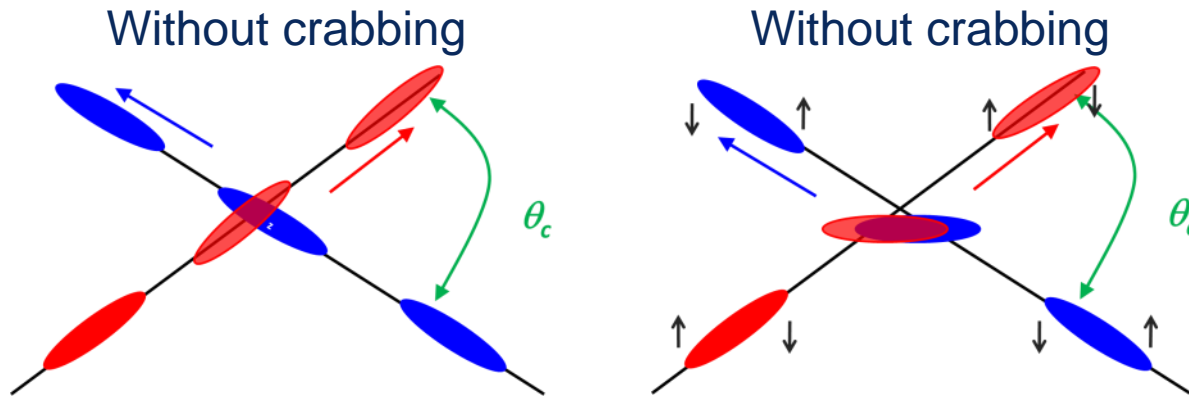


New crossing strategy under study to soften the pile-up density: some new schemas have interesting potential as “crab-kissing”, to be discussed with all experiments



(“Pile-up at HL-LHC and possible mitigation” Stephane Fartoukh)

$\alpha_{||1} = \alpha_{||1} : (y-z)$ normalized angle for B1

$\alpha_{||2} = \alpha_{||1} : (y-z)$ normalized angle for B2

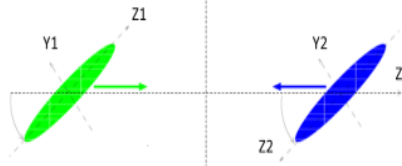

- 3 proto types available
- Cavity tests are on-going
- Test with beam in SPS foreseen in 2015-2016
- Beam test in LHC foreseen in 2017

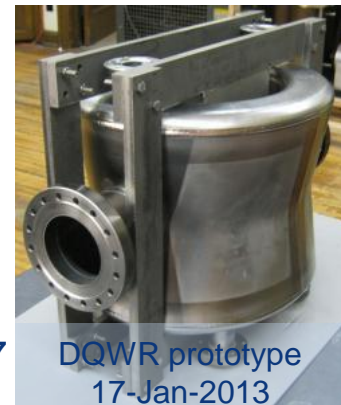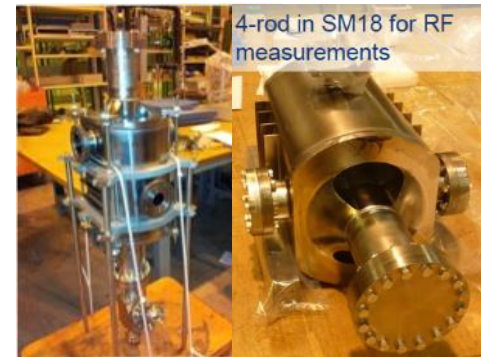

Thinking to cryomodule...




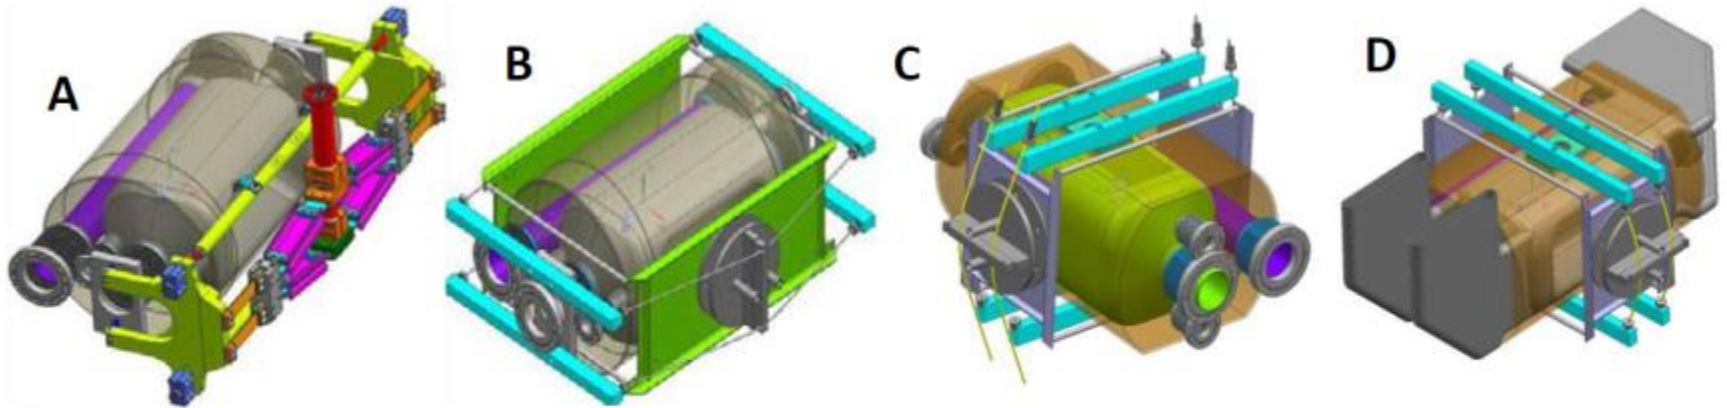




Figure 1: LHC crab cavity cryostat concept – A) JLab design, B) ANL design (helium pressure actuates bellows), C) ANL design (tuner deforms cavity outer surfaces), D) Waveguide

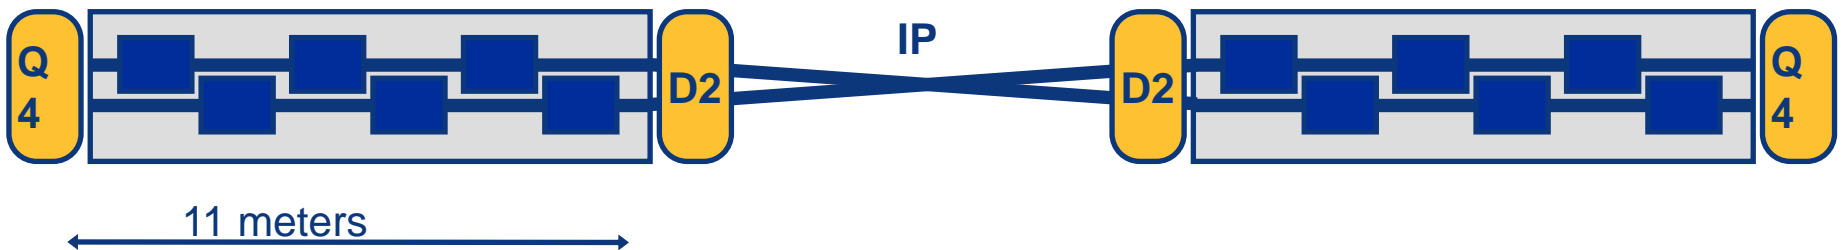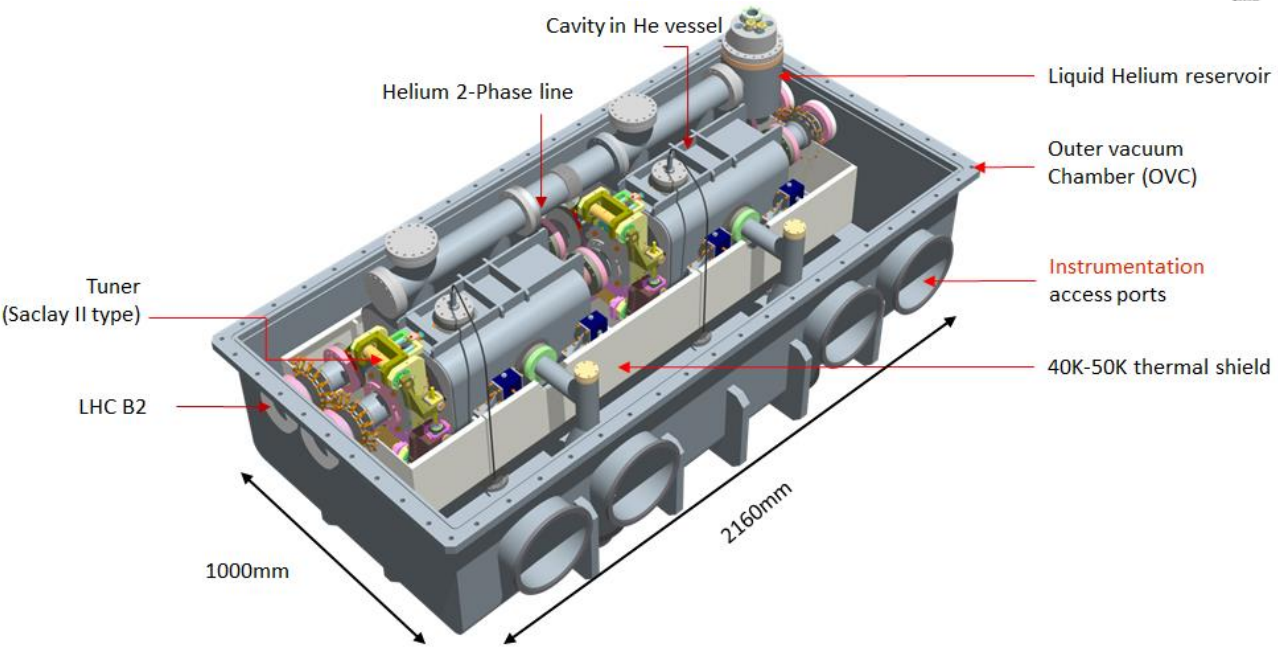

...and to test with beam in the CERN SPS (2016-2017)

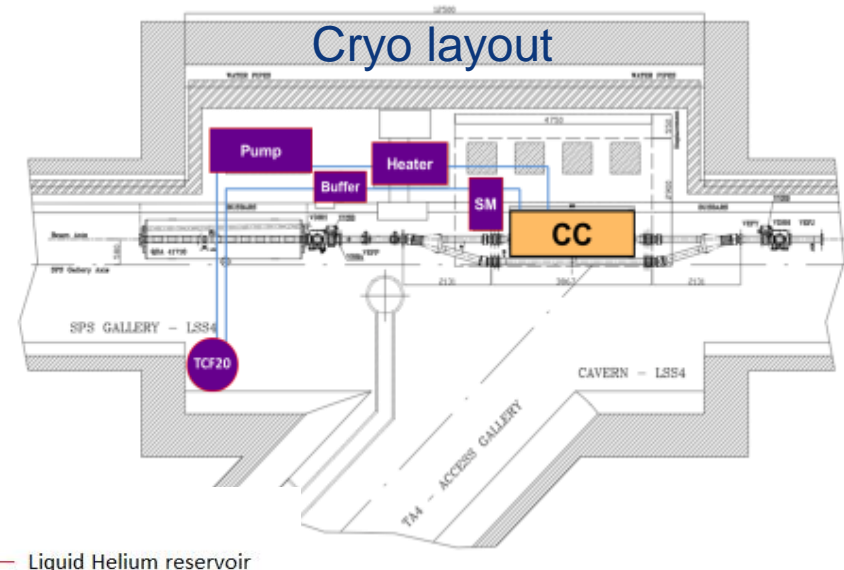

R2E: Removal of Power Converter (200kA-5 kV SC cable, 100 m height)

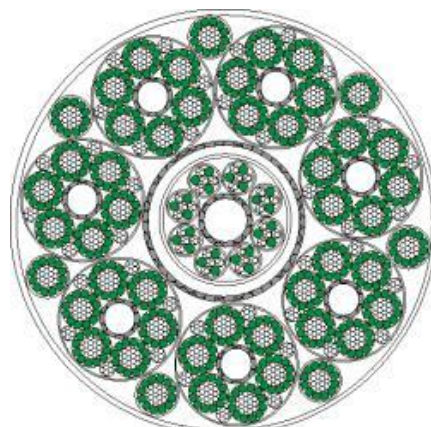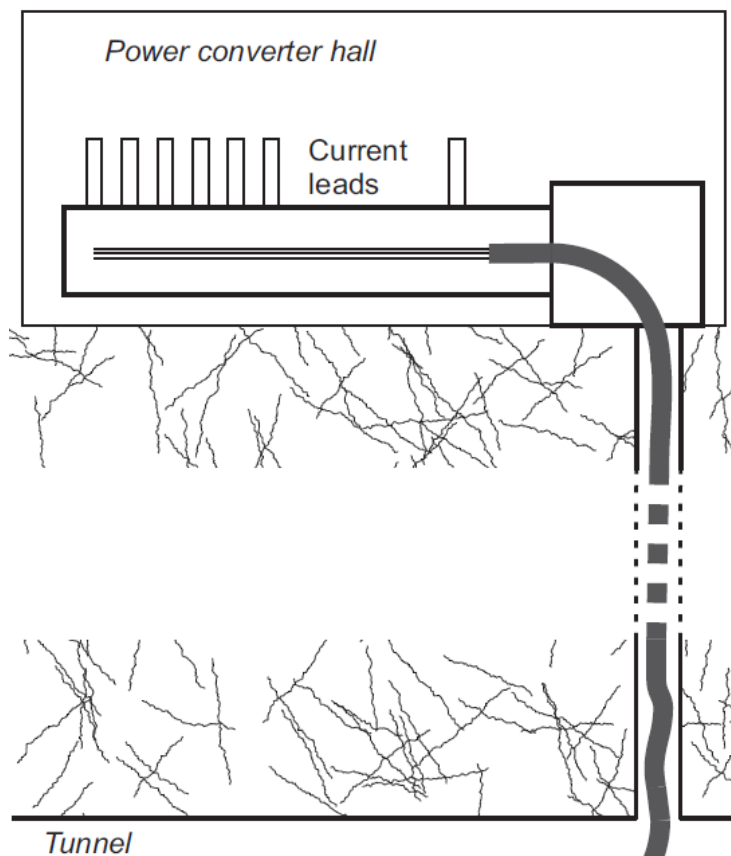

$\Phi = 62 \text{ mm}$

7 × 14 kA, 7 × 3 kA and 8 × 0.6 kA cables – $I_{\text{tot}} \sim 120 \text{ kA @ } 30 \text{ K}$




MgB_2
(or other HTS)

Also DFBs (current lead boxes) removed to surface
Final solution to R2E problem – in some points
 Make room for shielding un-movable electronics
Make the maintenance and application of ALARA principle much easier and effective




Luminosity Levelling, a key to success

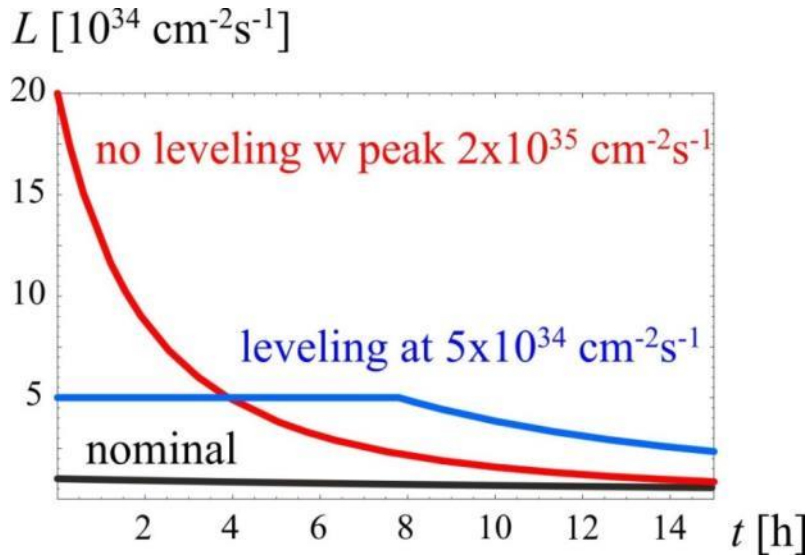

- High peak luminosity
- Minimize pile-up in experiments and provide “constant” luminosity

- Obtain about 3 - 4 $\text{fb}^{-1}/\text{day}$ (40% stable beams)
- About 250 to 300 $\text{fb}^{-1}/\text{year}$

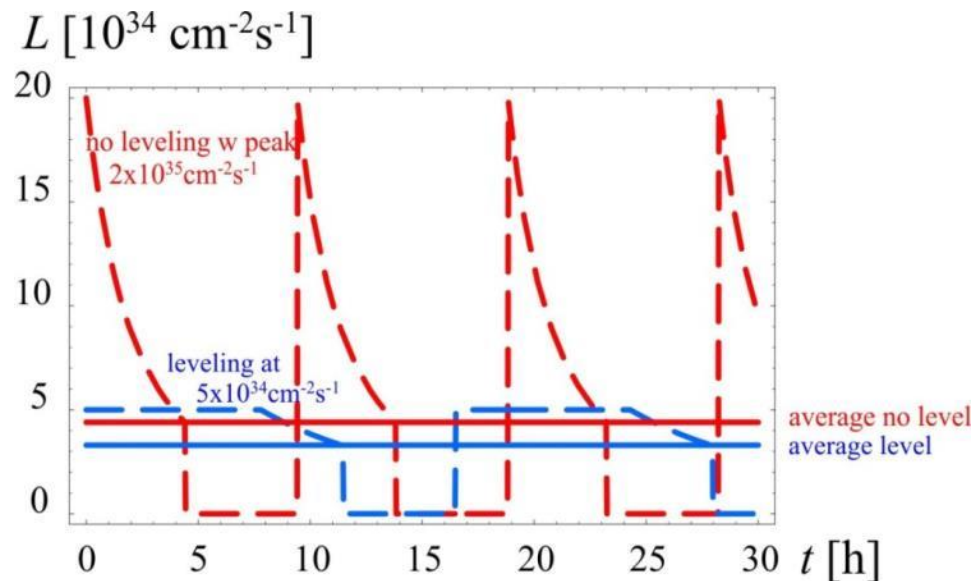

Baseline parameters of HL for reaching 250 -300 fb⁻¹/year

25 ns is the option


However:

50 ns should be kept as alive and possible because we DO NOT have enough experience on the actual limit (*e-clouds, I_{beam}*)

Continuous global optimisation with LIU

	25 ns	50 ns
# Bunches	2808	1404
p/bunch [10 ¹¹]	2.0 (1.01 A)	3.3 (0.83 A)
ϵ_L [eV.s]	2.5	2.5
σ_z [cm]	7.5	7.5
$\sigma_{\delta p/p}$ [10 ⁻³]	0.1	0.1
$\gamma\epsilon_{x,y}$ [μm]	2.5	3.0
β^* [cm] (baseline)	15	15
X-angle [μrad]	590 (12.5 σ)	590 (11.4 σ)
Loss factor	0.30	0.33
Peak lumi [10 ³⁴]	6.0	7.4
Virtual lumi [10 ³⁴]	20.0	22.7
T _{leveling} [h] @ 5E34	7.8	6.8
#Pile up @5E34	123	247

“...exploitation of the full potential of the high-luminosity upgrade of the LHC
 => High Luminosity LHC

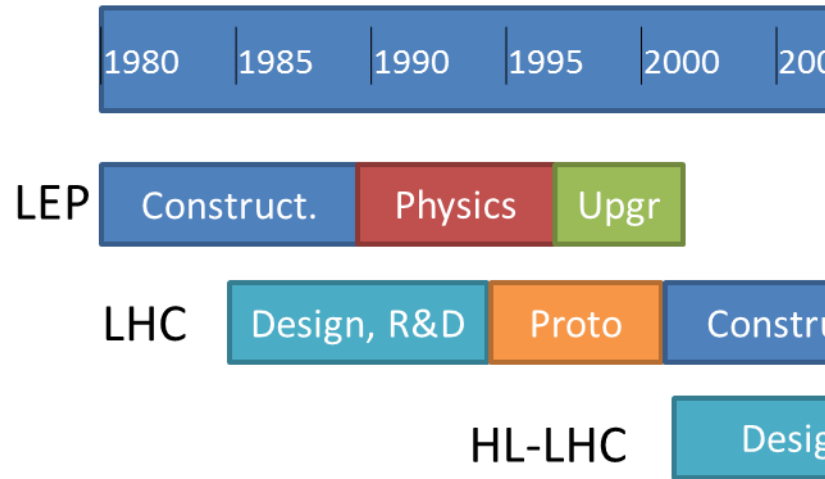



Kick-off meeting: 11th Nov. 2013
 (Daresbury)

<http://cern.ch/hilumilhc>

HiLumi LHC-LARP

Daresbury Laboratory, UK
3rd Joint Annual Meeting
11-15 November 2013

High Luminosity LHC Project Kick-off
Monday 11 Nov. Special Event

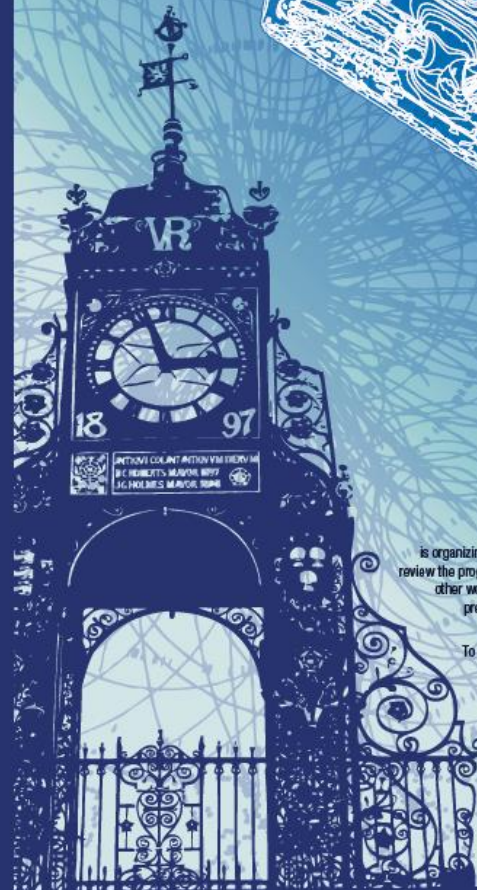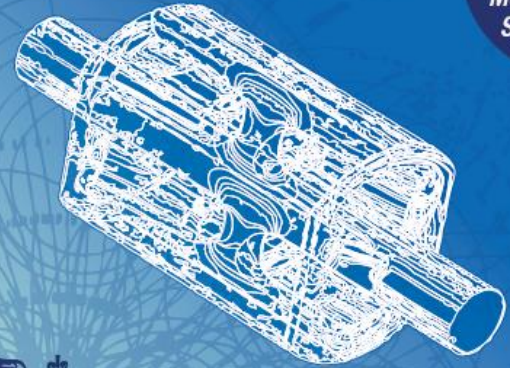

Organizing Committee:

- L. Rossi – CERN, Project Coordinator
- O. Brining – CERN, Deputy Project Coordinator
- J. Doubt/ C. Noels – CERN, Projects Support
- R. Appleby – CERN, Chairperson
- D. Angal-Kalinin – STFC
- S. Boegert – JAI
- G. Burt – CERN
- A. Dexter – CERN
- K. Hock – CERN
- L. Kennedy/S. Waller – STFC
- A. Woiski – CERN

The HiLumi LHC Design Study project

is organizing its 3rd Annual Meeting in collaboration with LARP. The meeting will review the progress in design and R&D of the FP7 HiLumi work packages, as well as other work packages. The main scope will be to provide a solid ground for the preparation of the High Luminosity LHC Conceptual Design Report, a key deliverable of the Design Study, due in the first part of 2014.

To mark the recent approval of the High Luminosity LHC project by the CERN Council as first priority for CERN and Europe, a special event called the HL-LHC Project Kick-off will be organized on the afternoon of Monday 11th November, with the participation of directors of the major stakeholders of the project.

The HiLumi LHC Design Study is included in the High Luminosity LHC project and is partly funded by the European Commission within the Framework Programme 7 Capacities Specific Programme, Grant Agreement 2844404.


For more details and free registration:

<http://cern.ch/hilumilhc>

“to propose an ambitious **post-LHC accelerator project at CERN** by the time of the next Strategy update”


- d) **CERN should undertake design studies for accelerator projects in a global context**, with emphasis on **proton-proton and electron-positron high-energy frontier machines**. These design studies should be coupled to a vigorous accelerator R&D programme, including **high-field magnets** and **high-gradient accelerating structures**, in collaboration with national institutes, laboratories and universities worldwide.

HGA

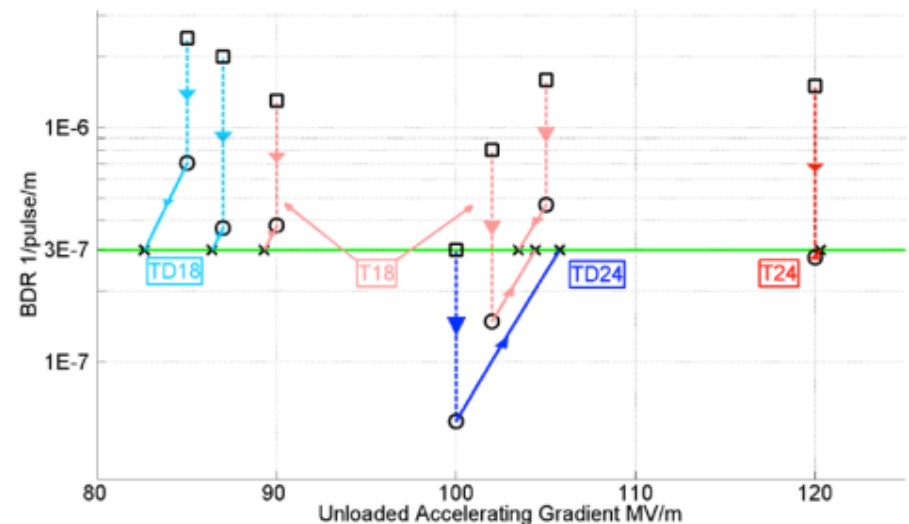

And also R&D on Proton-Driven Plasma Wakefield Acceleration (AWAKE Expt at CERN)


CLIC developments towards 2018

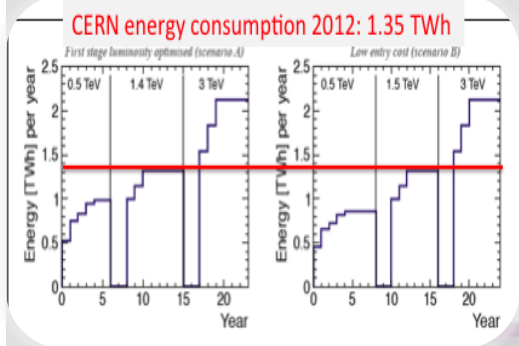

A re-baselined staged project plan, cost and power optimisation, increased industrialisation effort for cost-drivers




High Gradient structure development and significantly increased test-capacity for X-band RF-structures

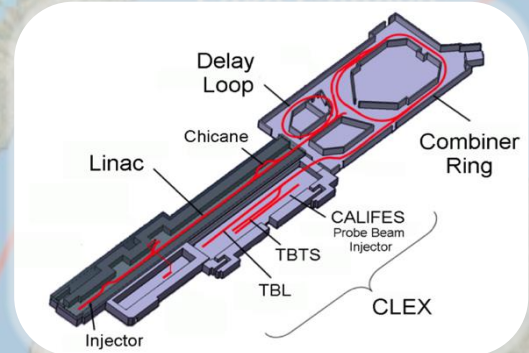


System-test programmes in CTF3, at ATF and FACET, as well as system-tests in collaborative programmes with light-source laboratories



Technical systems developments, related among others to complete modules, alignment/stability, instrumentation and power sources

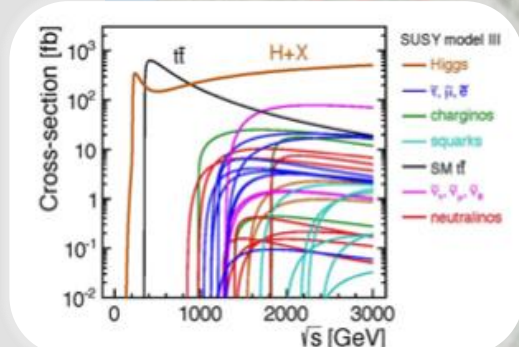

Physics studies related to energy frontier capabilities and potential new physics as it emerges from LHC



Tunnel implementations (laser straight)



Central MDI & Interaction Region

CLIC workshop 2014



3-7 February 2014

CERN

Europe/Zurich timezone

Search

Link:

<http://indico.cern.ch/conferenceDisplay.py?confId=275412>

Overview

Timetable

Registration

Registration Form

List of registrants

Accommodations

Insurance and Visa information

How to come to CERN

Visitors' Portable Computers Registration

CERN Shuttle service

CERN Bike sharing service

CLIC Study Website

Physics and Detector Study Website

This workshop will cover **Accelerator as well as the Detector and Physics studies**, with its present status and programme for the coming years.

For the Accelerator studies, the workshop spans over 5 days: Feb 3rd-7th
For the Detector and Physics studies, the workshop spans over 3 days: Feb 3rd -5th

Please register by filling-in the registration form in the left menu.

Common parts:

1. There will be an open plenary session on Monday afternoon February 3rd, giving an overview of the CLIC project (accelerator, physics/detector), placed in the context of other studies for machines at the energy frontier.
2. Workshop dinner on Wednesday evening

Dedicated **Accelerator sessions**:

1. Parallel sessions on Tuesday and Wednesday, where we attempt to have presentations of as many as possible of the activities inside the CLIC/CTF3 collaboration, and also some special meetings related to key "CLIC technologies" (for example FP7 project and WP meetings with strong links)
2. A session Thursday covering High Gradient NC accelerators for industrial and medical applications as well as XFELs, using CLIC and other high gradient technology developments
3. A plenary session on the Friday morning focussing on systemtests of key CLIC challenges
4. A Collaboration Board Friday afternoon

Dedicated **Detector and Physics sessions**:

1. Parallel sessions on Tuesday and Wednesday chaired by co-conveners, attempting to give an overview of the current activities and future plans
2. An Institute Board meeting on Tuesday early evening.



We are looking for the widest possible participation and in particular we will encourage presentations and involvement of younger colleagues.

“to propose an ambitious post-LHC accelerator project at CERN by the time of the next Strategy update”

d) CERN should undertake design studies for accelerator projects in a global context, with emphasis on proton-proton and electron-positron high-energy frontier machines. These design studies should be coupled to a vigorous accelerator R&D programme, including **high-field magnets** and **high-gradient accelerating structures**, in collaboration with national institutes, laboratories and universities worldwide.

HFM


HGA

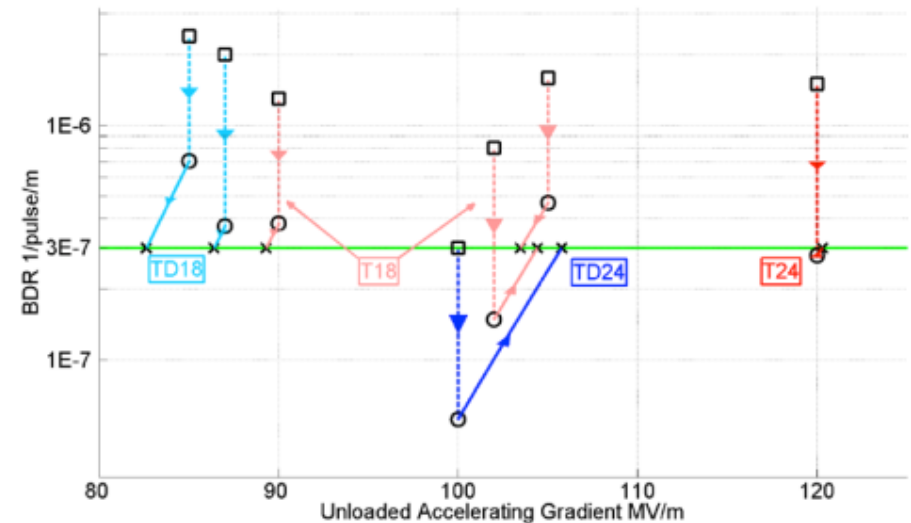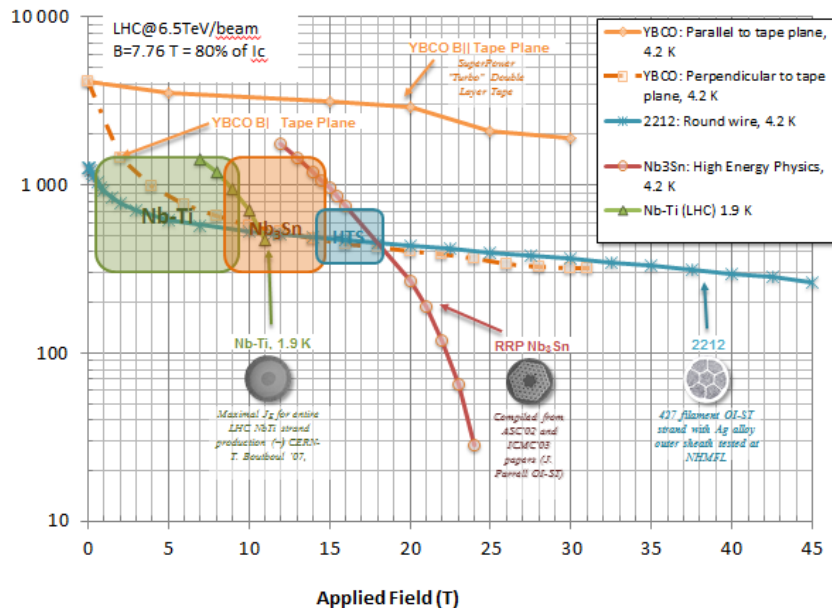


And also R&D on Proton-Driven Plasma Wakefield Acceleration (AWAKE Expt at CERN)

Malta Workshop: HE-LHC @ 33 TeV c.o.m.

14-16 October 2010

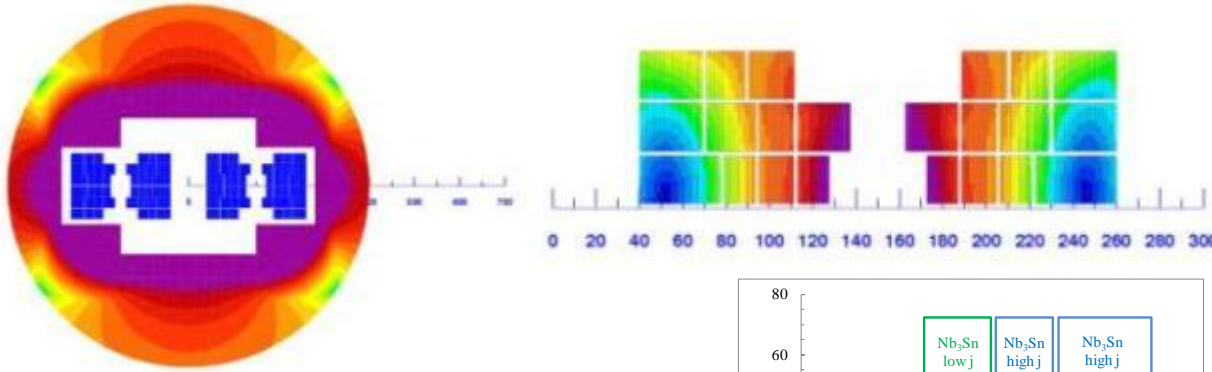

Material	N. turns	Coil fraction	Peak field	J _{overall} (A/mm ²)
Nb-Ti	41	27%	8	380
Nb3Sn (high Jc)	55	37%	13	380
Nb3Sn (Low Jc)	30	20%	15	190
HTS	24	16%	20.5	380

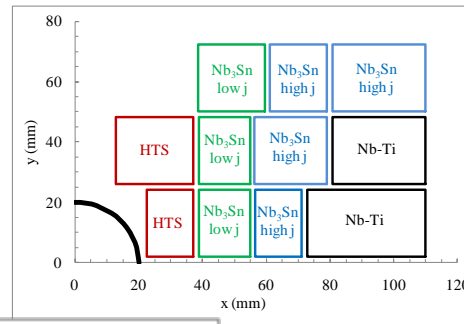

Magnet design (20 T): very challenging but not impossible.


300 mm inter-beam
Multiple powering in the same magnet (and more sectioning for energy)

Work for 4 years to assess HTS for 2X20T to open the way to 16.5 T/beam .

Otherwise limit field to 15.5 T for 2x13 TeV

Higher INJ energy is desirable (2xSPS)

Dipole Field for Hadron Collider

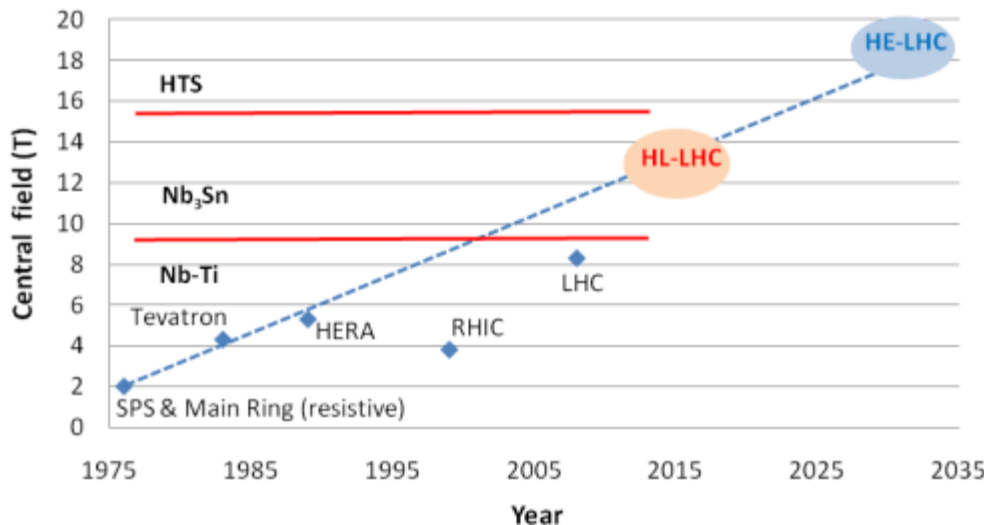

ing the beam screen at 60 K.

ks to dumping time.


C. Reaching 2×10^{34} appears reasonable.
s beam handling for INJ & beam dump:
make twice more room for LHC kickers.

HE-LHC main parameters

parameter	LHC	HL-LHC	HE-LHC
c.m. energy [TeV]		14	33
circumference C [km]		26.7	26.7
dipole field [T]		8.33	20
dipole coil aperture [mm]		56	40
beam half aperture [cm]		~2	1.3
injection energy [TeV]		0.45	>1.0
no. of bunches		2808	2808
bunch population N_b [10^{11}]	1.15	2.2	0.94
init. tr. norm. emittance [μm]	3.75	2.5	1.38
init. longit. emittance [eVs]		2.5	3.8
no. IPs contributing to ΔQ	3	2	2
max. total b-b tune shift ΔQ	0.01	0.015	0.01
beam current [A]	0.584	1.12	0.478
rms bunch length [cm]		7.55	7.55
IP beta function [m]	0.55	0.15	0.35
rms IP spot size [μm]	16.7	7.1 (min.)	5.2

Superconductors: from materials to applications

Current Density Across Entire Cross-Section

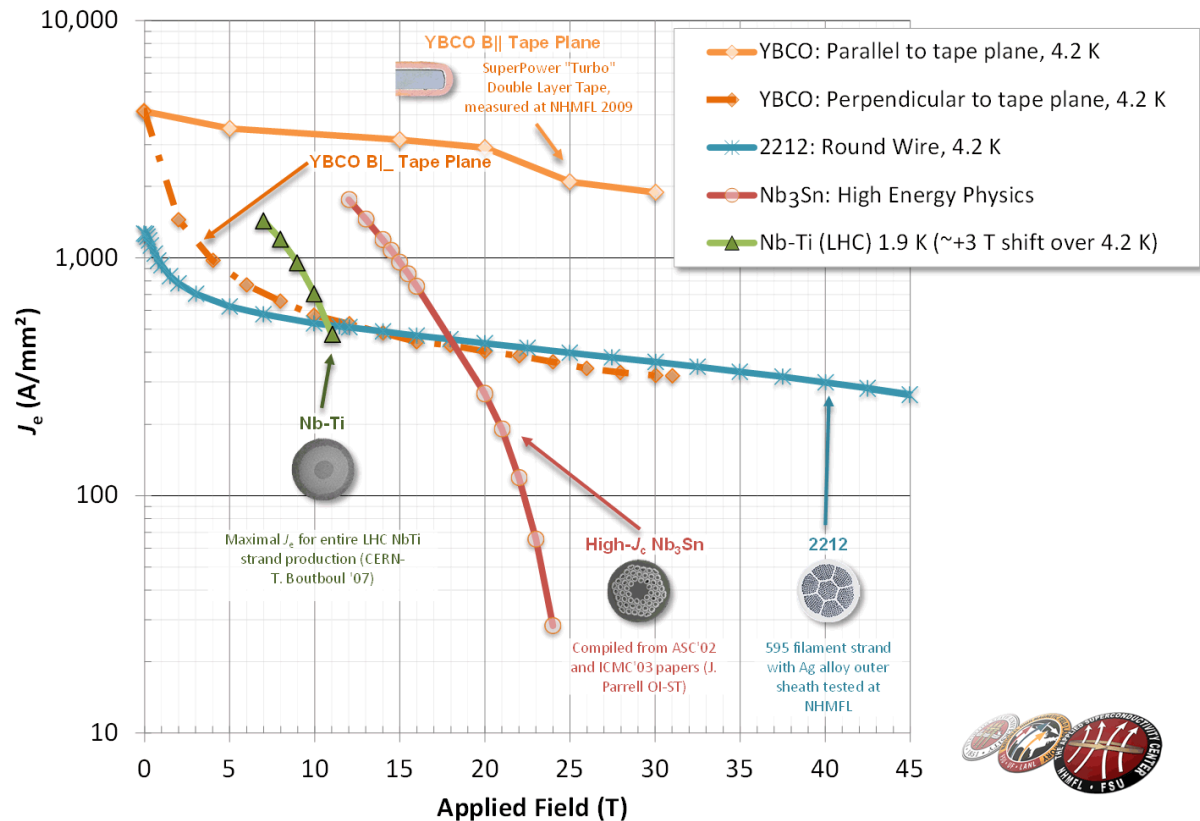


Superconductors as seen by the eye of an engineer

The grand challenge of today is to develop the technology of **high-field superconductors** (field quality,...)



LTS (NbTi ; Nb₃Sn)

NbTi mature but limited to 9T
Is Nb₃Sn mature ? Yes, and no

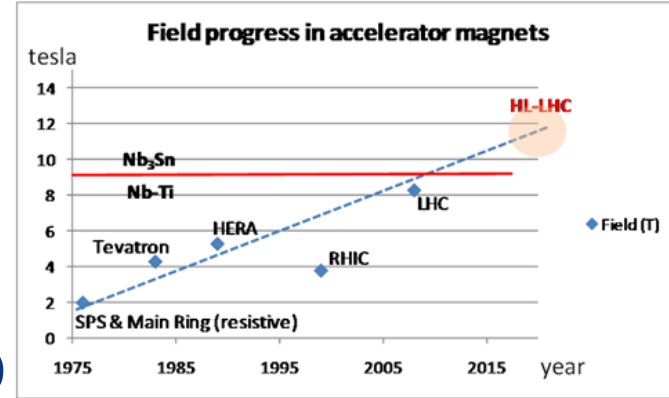

performance of Nb₃Sn wires has seen a great boost in the past decade (factor 3 in J_C w/r to ITER)

However, Nb₃Sn magnets were never built nor operated in accelerators. Manufacturing, quench, training, protection, strain tolerance, field quality are the focus today to make this new technology a reality

Solid and aggressive R&D in HFM (High Field Magnet) for accelerators must be intensified

HTS

Can HTS displace LTS ? Not today

Much needs to be done to bring this technology to a point where it can be sold as “mature”

Materials have potential that can be exploited

- OPHT for BSCCO-2212
- Thicker layer for YBCO tapes
- The Holy Grail of a round YBCO wire



Production quantities, homogeneity and cost need to evolve

Step-up application demands, from self-field (SC-link is an ideal test-bed) to high-field accelerator magnets (feasibility)




Program Eucard2 on HTS

EuCARD2: Develop 10 kA class HTS accelerator cable using Bi-2212 and YBCO. Test stability, magnetization, and strain tolerance

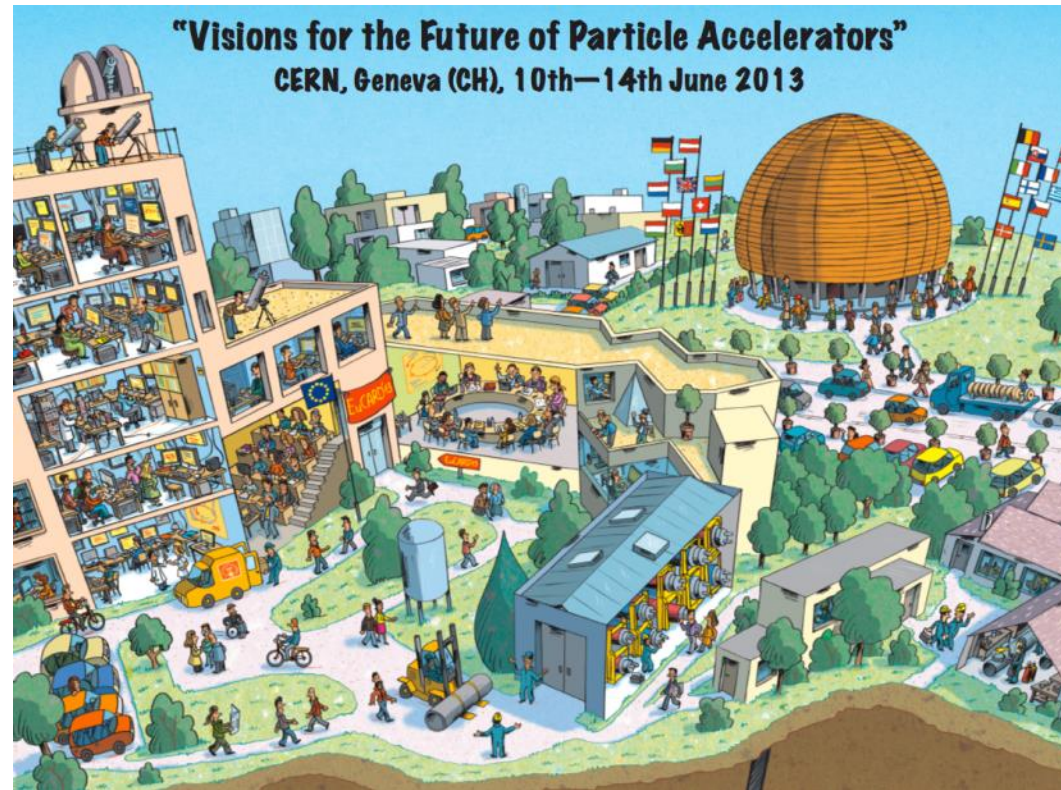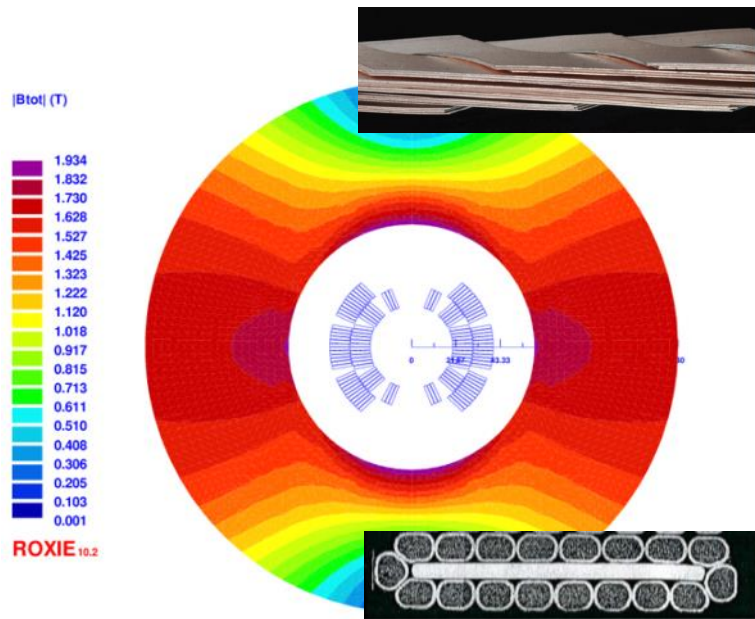

WP10: a 5 T, 40 mm bore HTS dipole

From materials to applications

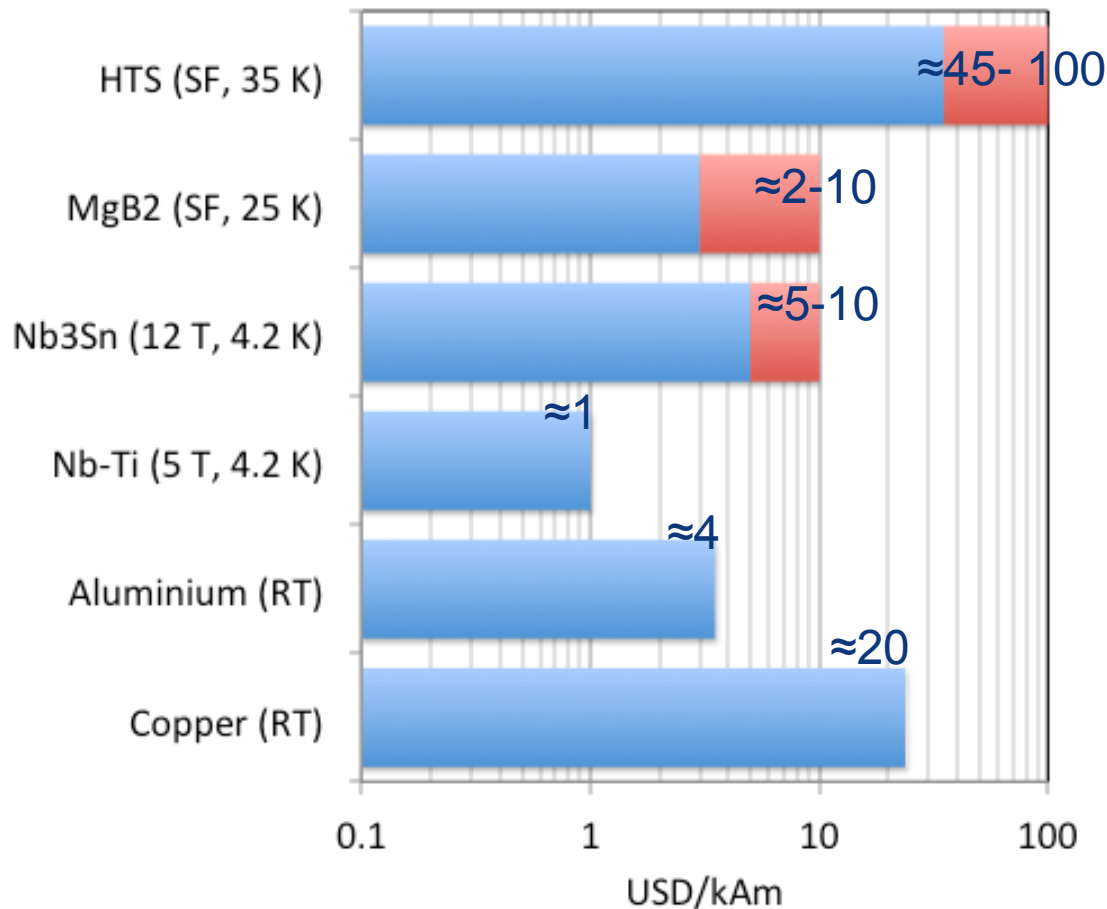


Superconductors as seen by the eye of a manager
The grand challenge of today is availability of **long lengths of reasonably priced commercial materials**

"Very High Energy LHC"

First studies on a new 80 km tunnel in the Geneva area

- 42 TeV with 8.3 T using present LHC dipoles
- 80 TeV with 16 T based on Nb₃Sn dipoles
- 100 TeV with 20 T based on HTS dipoles

**HE-LHC :33 TeV
with 20T magnets**

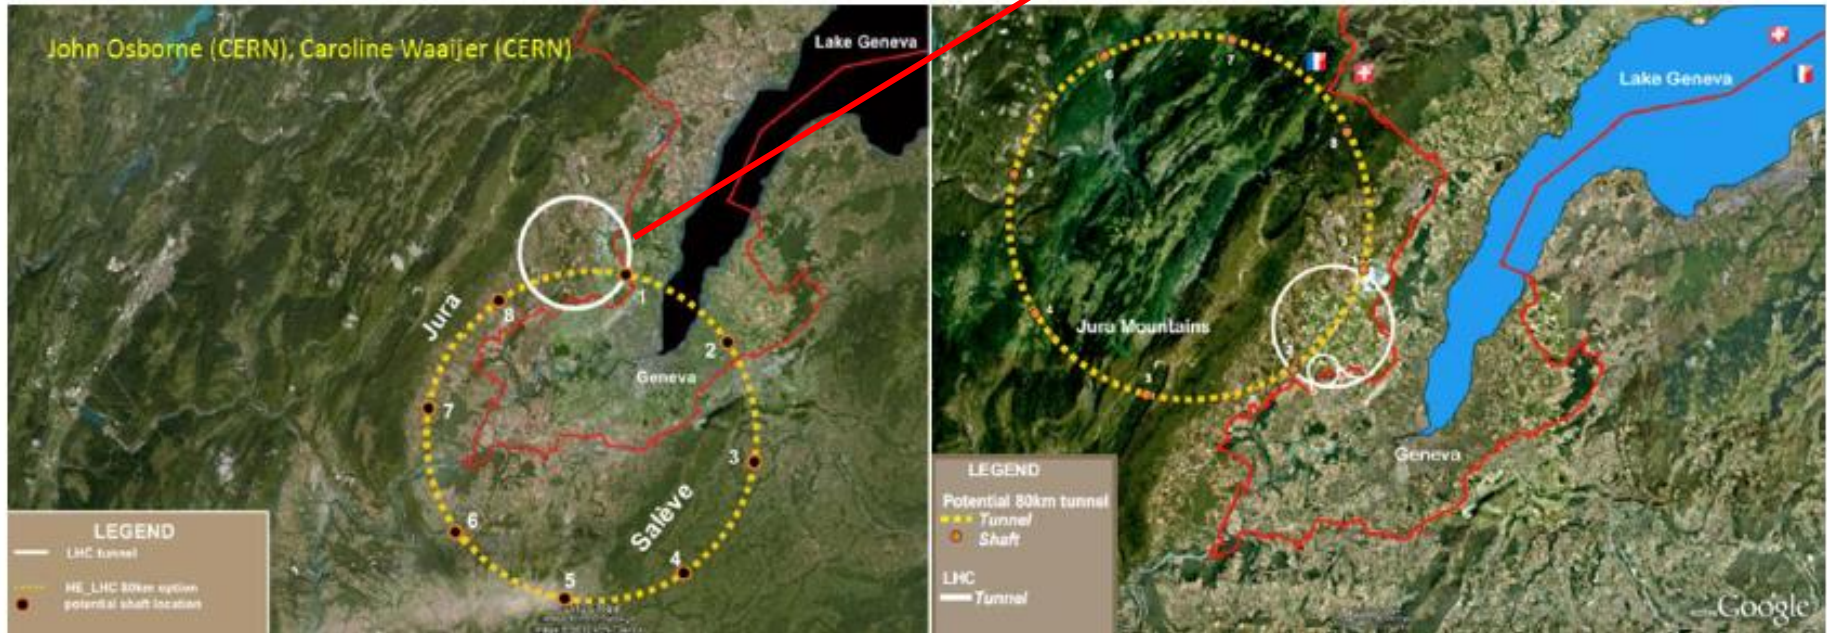


80-100 km tunnel infrastructure in Geneva area – design driven by pp-collider requirements with possibility of e⁺-e⁻ (TLEP) and p-e (VLHeC)

**FCC (Future Circular Colliders)
CDR and cost review
for the next ESU (2018)
(including injectors)**

**16 T ⇒ 100 TeV in 100 km
20 T ⇒ 100 TeV in 80 km**

LEGEND

- LHC tunnel
- HE_LHC 80km option
- potential shaft location

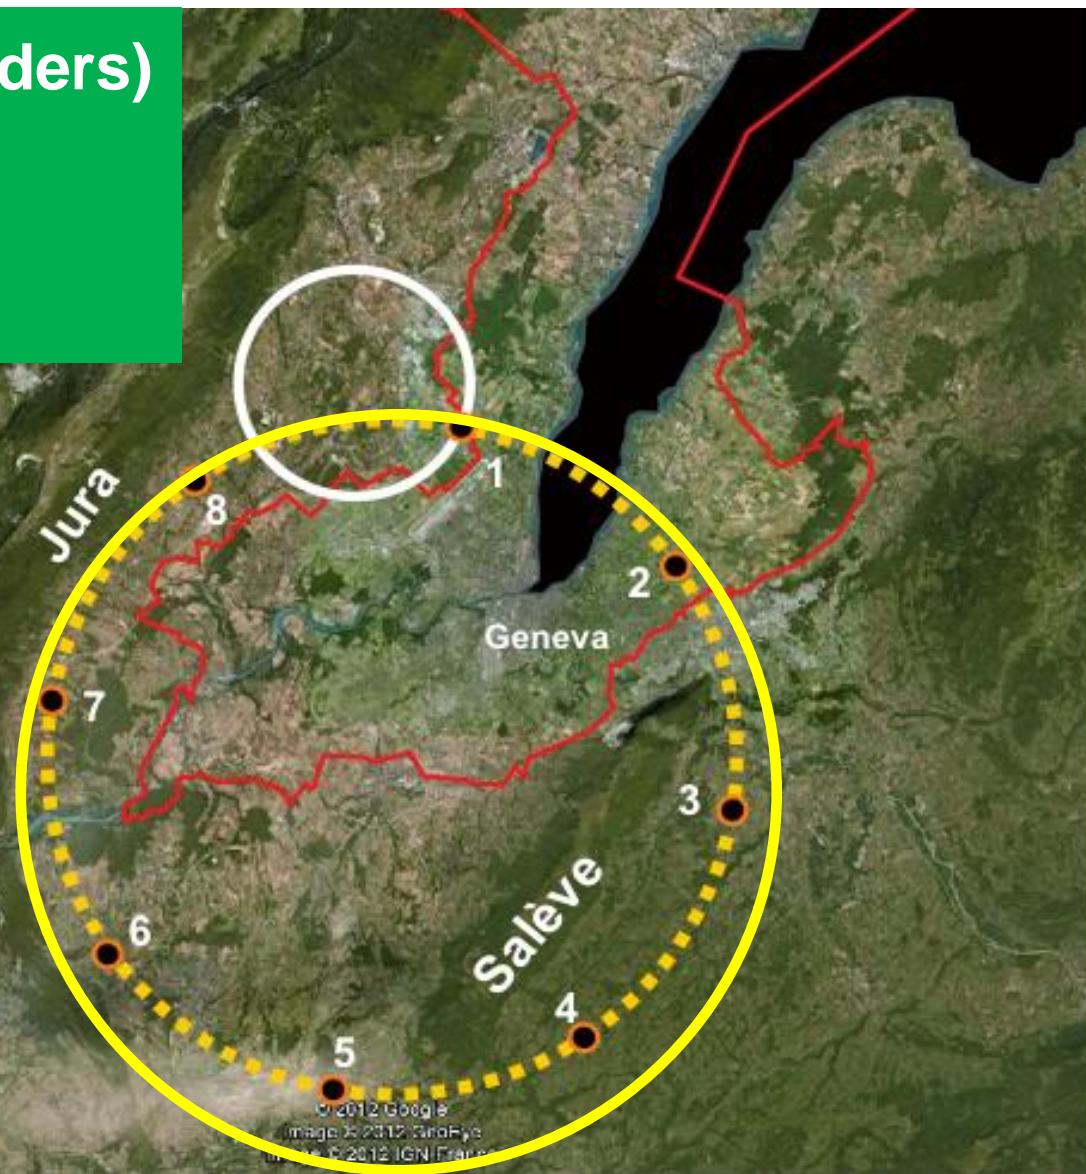

FCC Study Scope and Structure

Future Circular Colliders - Conceptual Design Study for next European Strategy Update (2018)

Infrastructure

tunnels, surface buildings, transport (access roads), civil engineering, cooling ventilation, electricity, cryogenics, communication & IT, fabrication and installation processes, maintenance, environmental impact and monitoring,

Hadron injectors

Beam optics and dynamics
Functional specs
Performance specs
Critical technical systems
Operation concept

Hadron collider


Optics and beam dynamics
Functional specifications
Performance specs
Critical technical systems
Related R+D programs
HE-LHC comparison
Operation concept
Detector concept
Physics requirements

e+ e- collider

Optics and beam dynamics
Functional specifications
Performance specs
Critical technical systems
Related R+D programs
Injector (Booster)
Operation concept
Detector concept
Physics requirements

e- p option: Physics, Integration, additional requirements

*“CERN should undertake design studies for accelerator projects in a global context, with emphasis on **proton-proton** and electron-positron **high-energy frontier machines.**”*

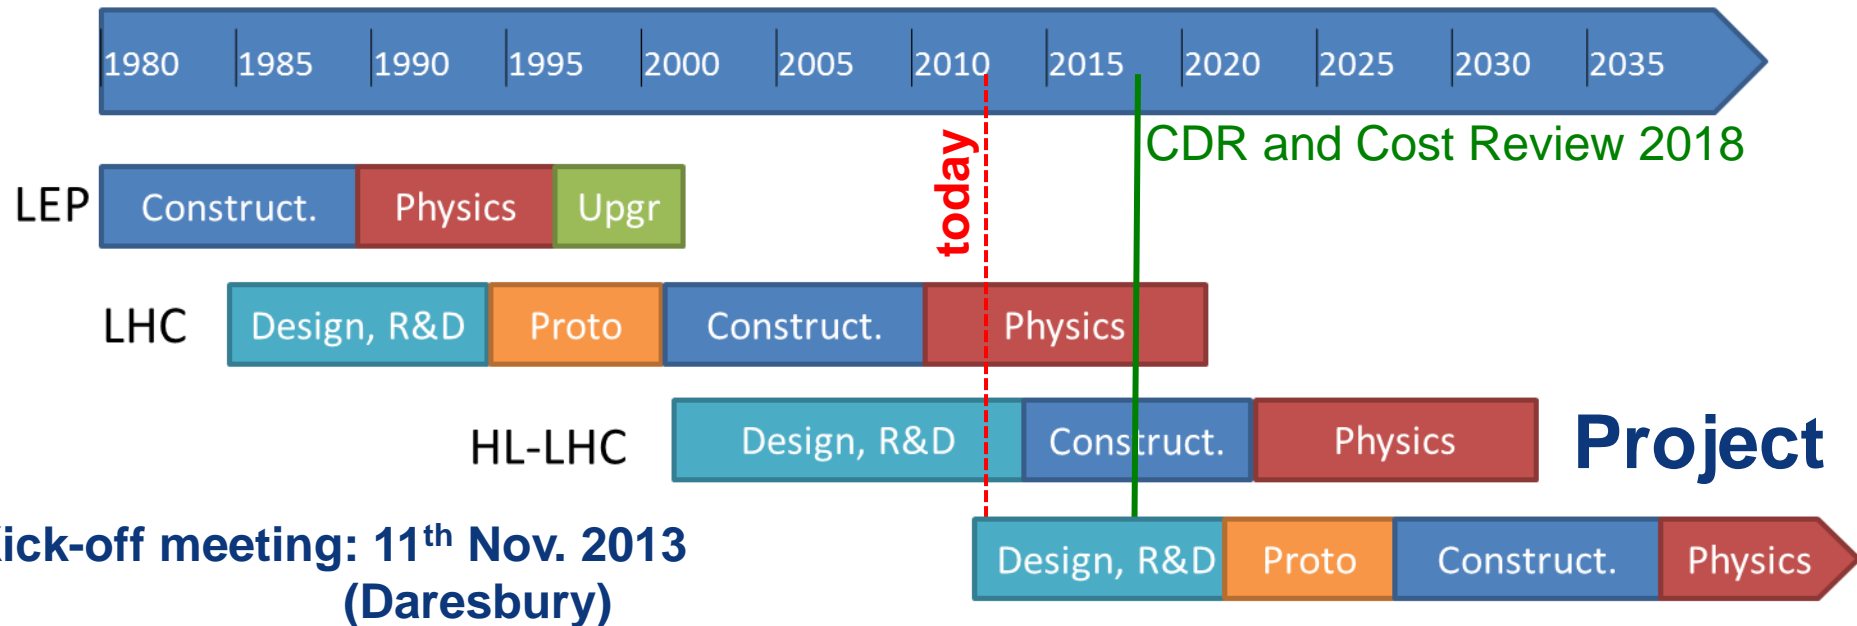

FCC Study : p-p towards 100 TeV
Kick-off meeting: 12th-14th Feb. 2014

FCC: Future Circular Colliders

Future Circular Collider Study Kick-off Meeting

12-15 February 2014,
University of Geneva,
Switzerland

LOCAL ORGANIZING COMMITTEE

University of Geneva

C. Blanchard, A. Blondel,
C. Doglioni, G. Iacobucci,
M. Koratzinos

CERN

M. Benedikt, E. Delucinge,
J. Gutleber, D. Hudson,
C. Potter, F. Zimmermann

SCIENTIFIC ORGANIZING COMMITTEE


FCC Coordination Group

A. Ball, M. Benedikt, A. Blondel,
F. Bordry, L. Bottura, O. Brüning,
P. Collier, J. Ellis, F. Gianotti,
B. Goddard, P. Janot, E. Jensen,
J. M. Jimenez, M. Klein, P. Lebrun,
M. Mangano, D. Schulte,
F. Sonnemann, L. Tavian,
J. Wenninger, F. Zimmermann



FCC Kick-off Meeting in Geneva next week

<http://indico.cern.ch/e/fcc-kickoff>

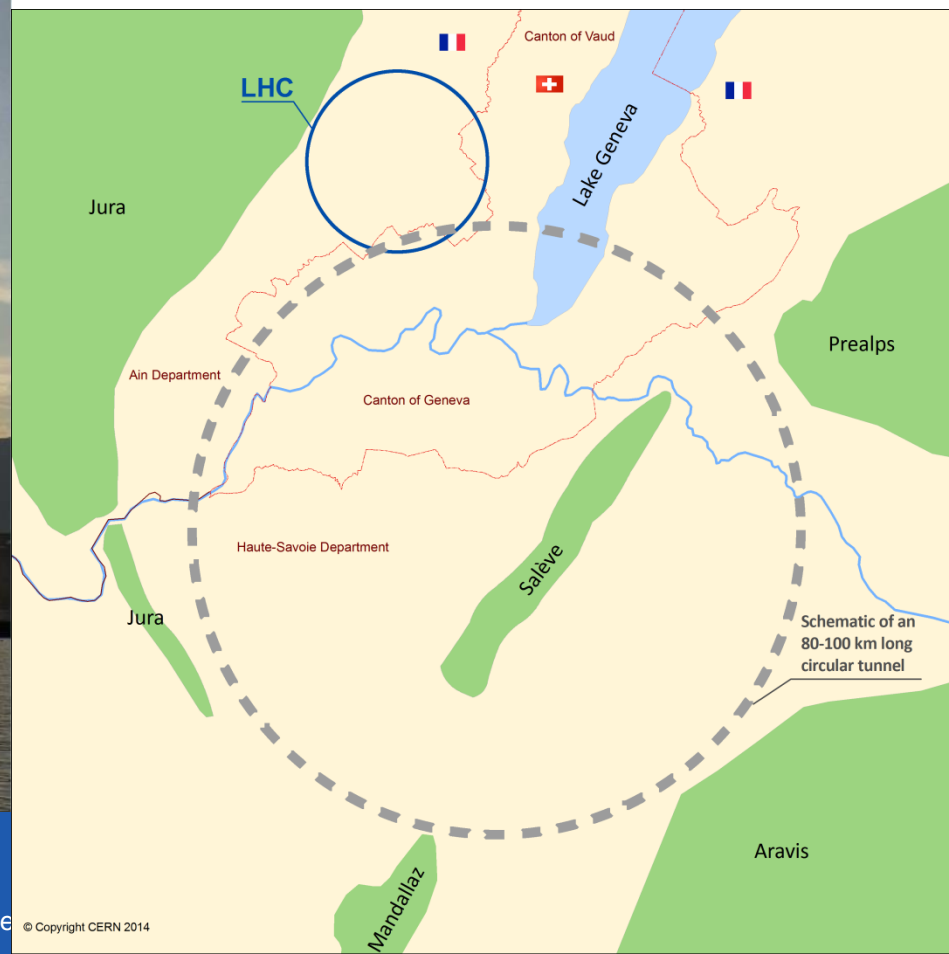

Schematic of an
80-100 km long
circular tunnel



UNIVERSITÉ
DE GENÈVE



[http://indico.cern.ch/
e/fcc-kickoff](http://indico.cern.ch/e/fcc-kickoff)



Exploitation of LHC and Future Circular Colliders

Frédéric Bordry

Basics of Accelerator Science and Technology at CERN – Chavanne


Conclusion: “Exploitation of the full potential of the LHC”


- LS1 [2013-2014] : 1st beams in 2015
 - Run 2 : 13 TeV – 25 ns – up to $1.7 \cdot 10^{34} \text{ cm}^{-2} \cdot \text{s}^{-1}$, 40-45 fb⁻¹ per year
 - LS2 (higher intensity - LIU) [2018 or 2019]
 - Run 3 (up to $\sim 2.0 \cdot 10^{34} \text{ cm}^{-2} \cdot \text{s}^{-1}$)
- 300 fb⁻¹ before LS3**
- **HL-LHC : R&D =>** now an approved project with a kick-off meeting on 11th Nov. 2013
- A lot of technical and operation challenges :**
- Nb3Sn magnets (accelerator field quality) (HFM roadmap)
 - Collimators
 - Superconducting links
 - Crab cavities
 - Increased availability (machine protection,...)
 - ...

Accelerator-experiment interface are central:


- Bunch spacing, pile-up density, crossing schemas, background, forward detectors, collimation,...

3000 fb⁻¹ before 2035

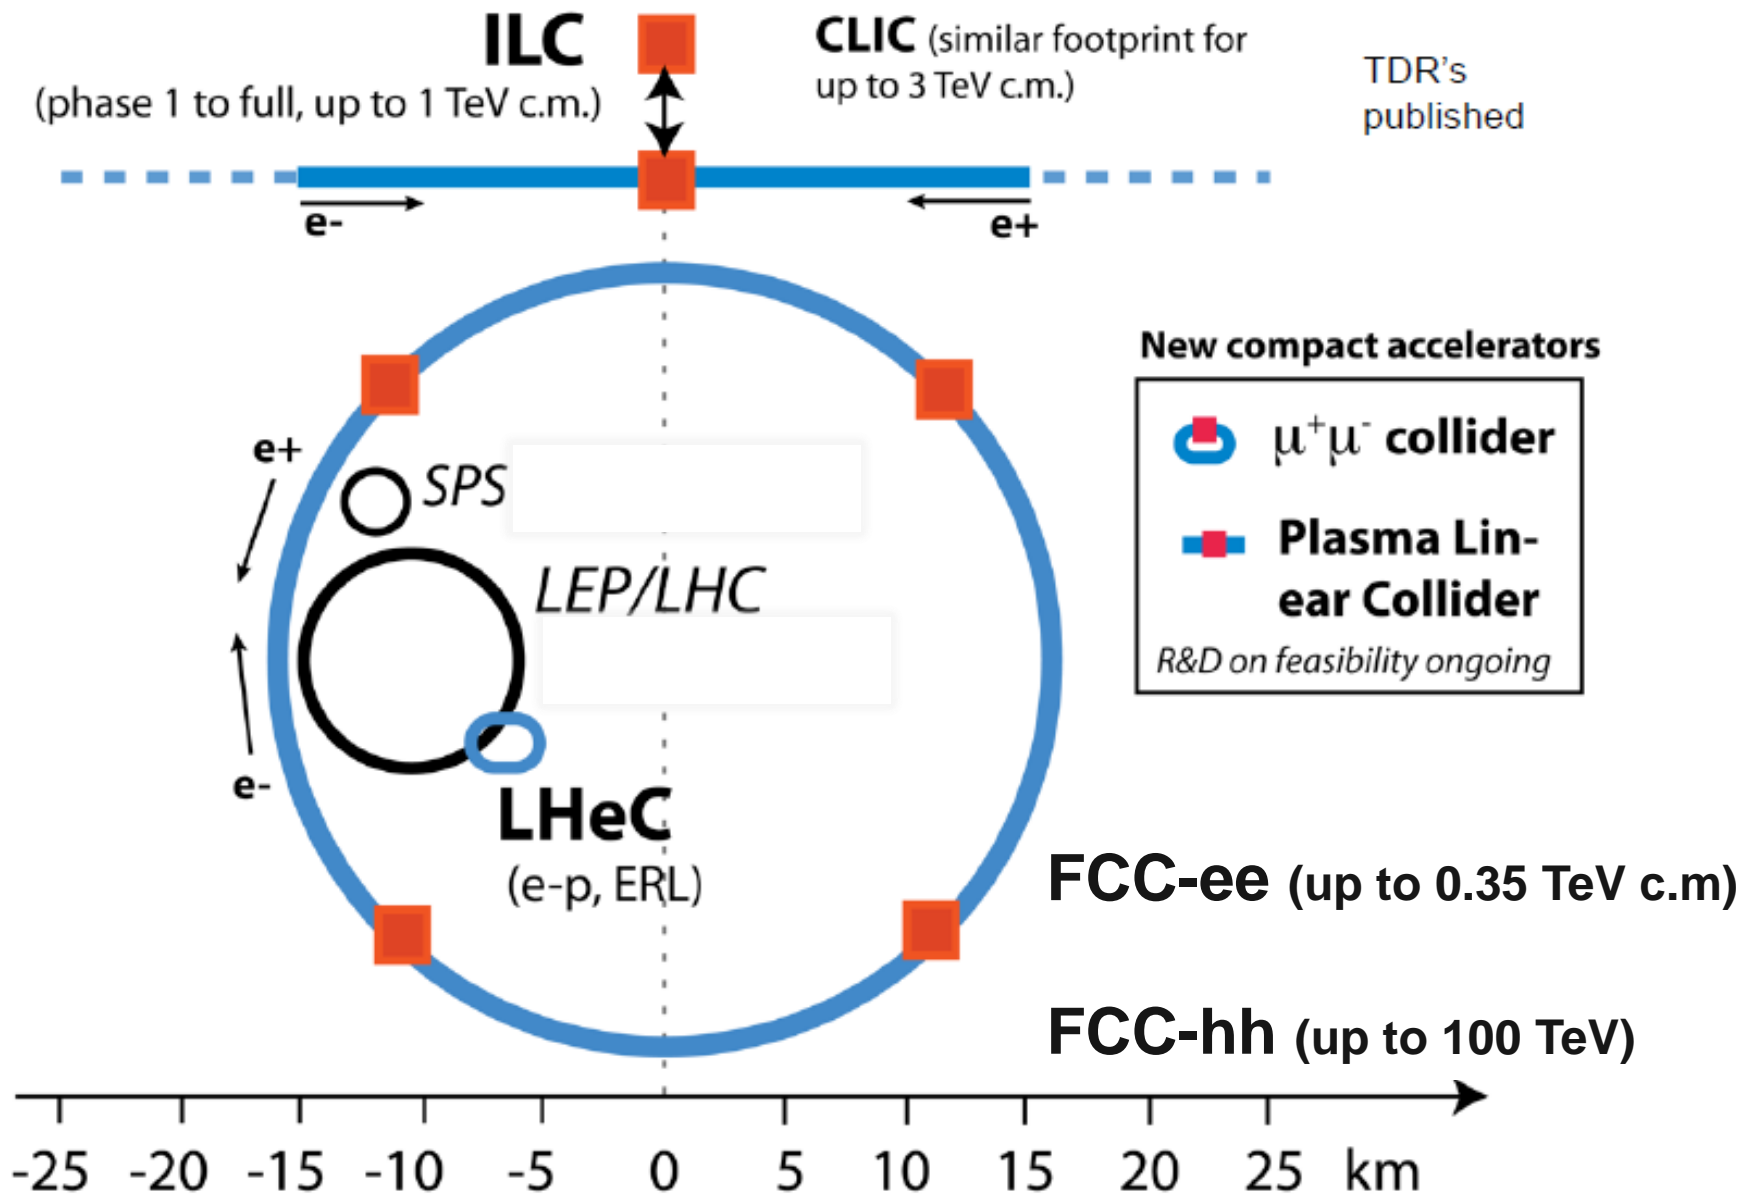



www.cern.ch

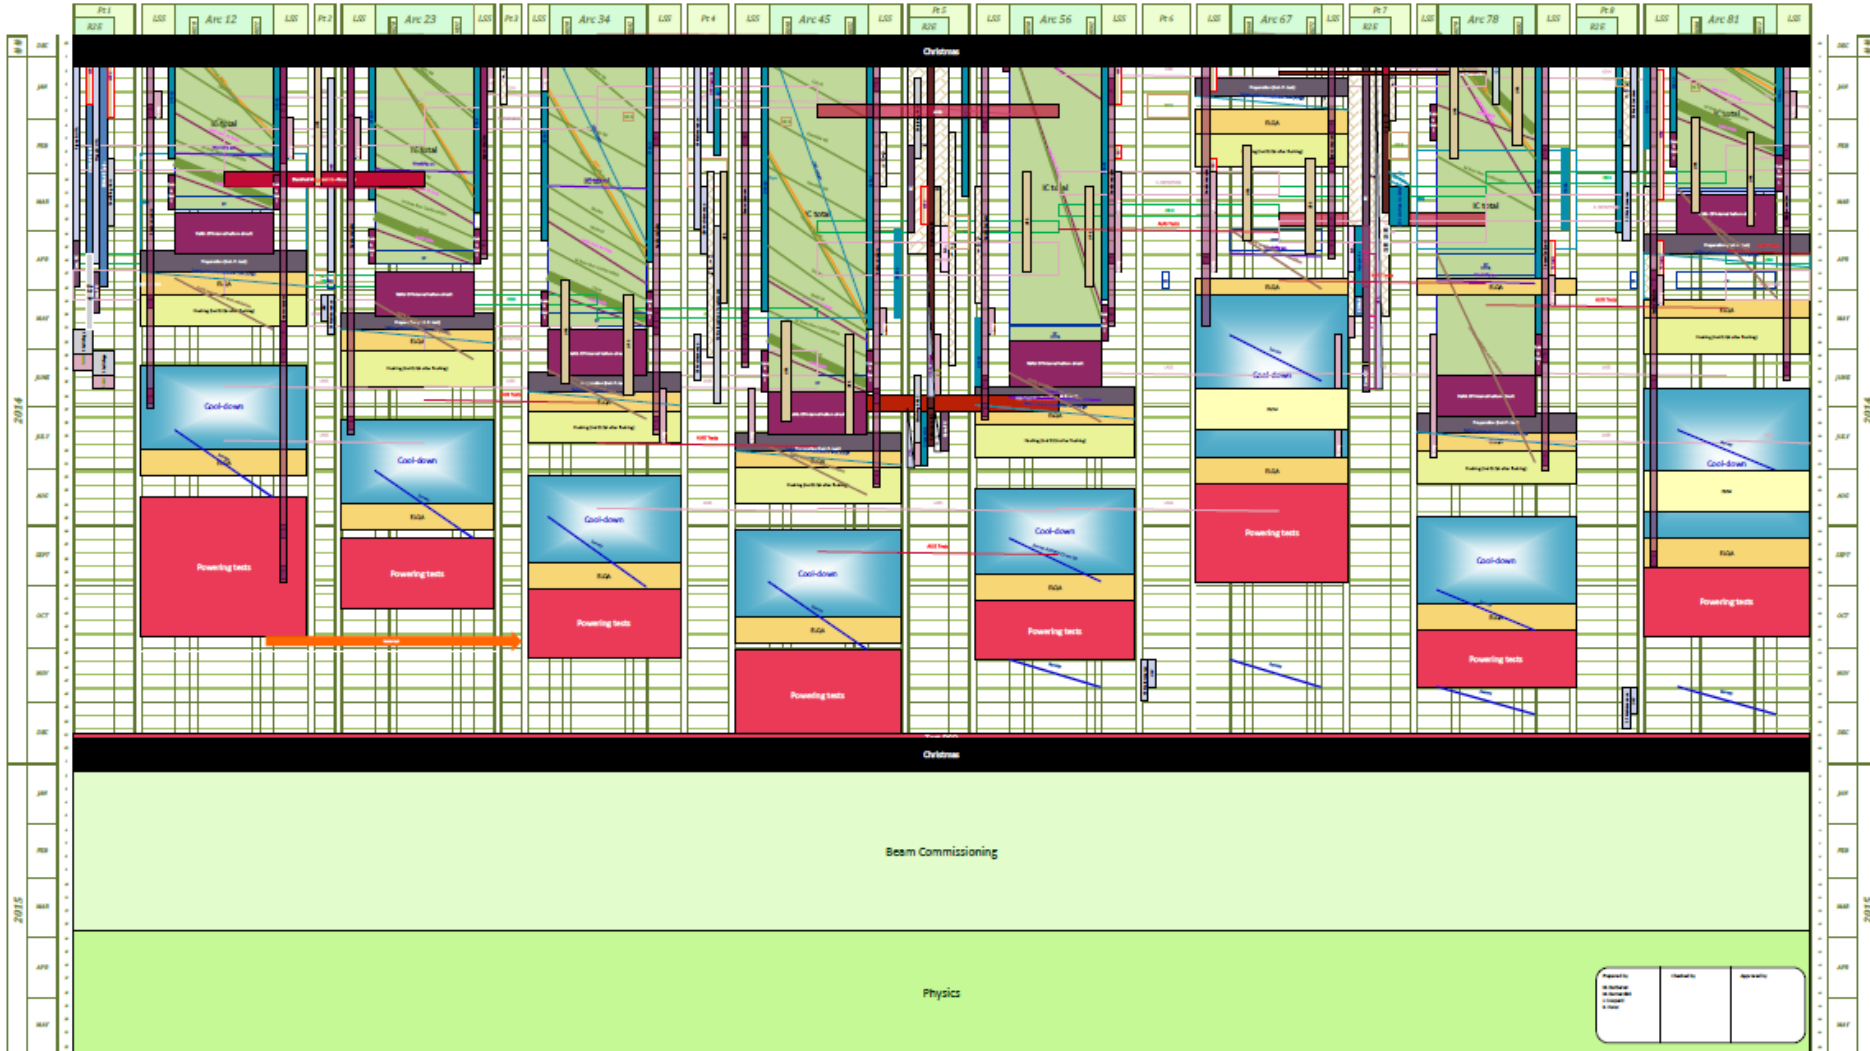

Next Milestones: High Luminosity LHC

Jun. 2014: PDR (Preliminary Design Report) and re-baseline (costing, time) of the project

Sep. 2015: First short model QXF (inner triplet)

Nov. 2015: TDR and end of FP7 Design Study

Sep. 2016: First full size MQXF (long triplet Quad)

2016-17: Test Crab Cavities in SPS

Start Construction

LS2 (2018): Installation in LS2 of Cryogenics P4, SC horizontal link P7, 11 T dipole and DS collimators in P2, first Molybdenum collimators

LS3 (2022-23) : installation of all HL-LHC hardware synchronized with long detector shutdown