


# Space Charge Mitigation


Massimo.Ferrario@LNF.INFN.IT

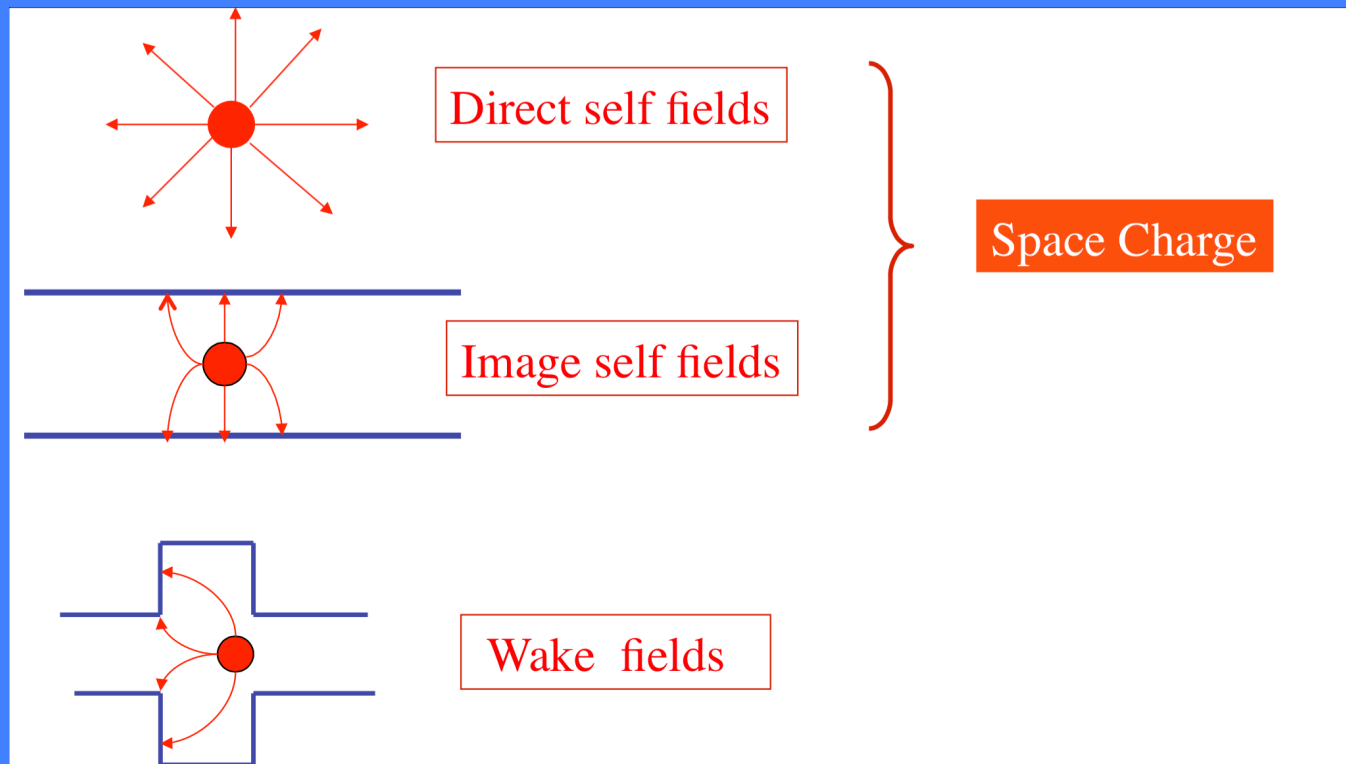


# OUTLINE

- The rms emittance concept
- rms envelope equation
- Space charge forces
- Space charge induced emittance oscillations
- Matching conditions and emittance compensation


# Trace space of an ideal laminar beam

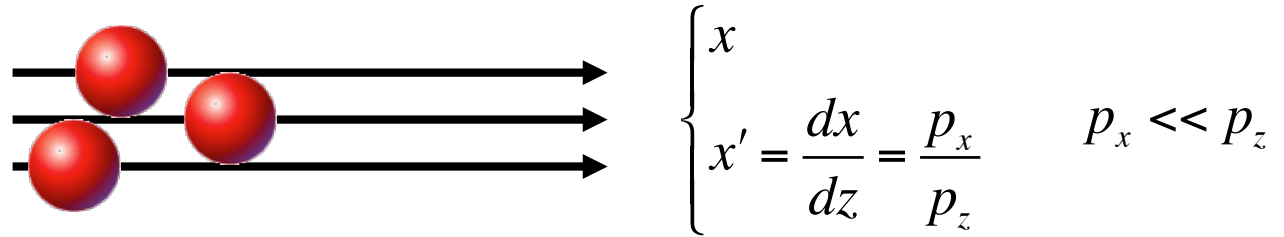



$$\begin{cases} x \\ x' = \frac{dx}{dz} = \frac{p_x}{p_z} \end{cases} \quad p_x \ll p_z$$

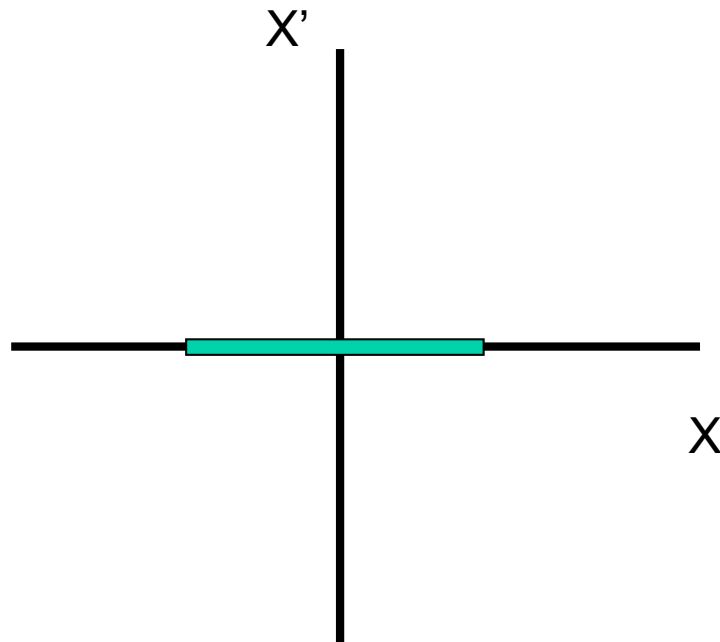

# Trace space of a laminar beam

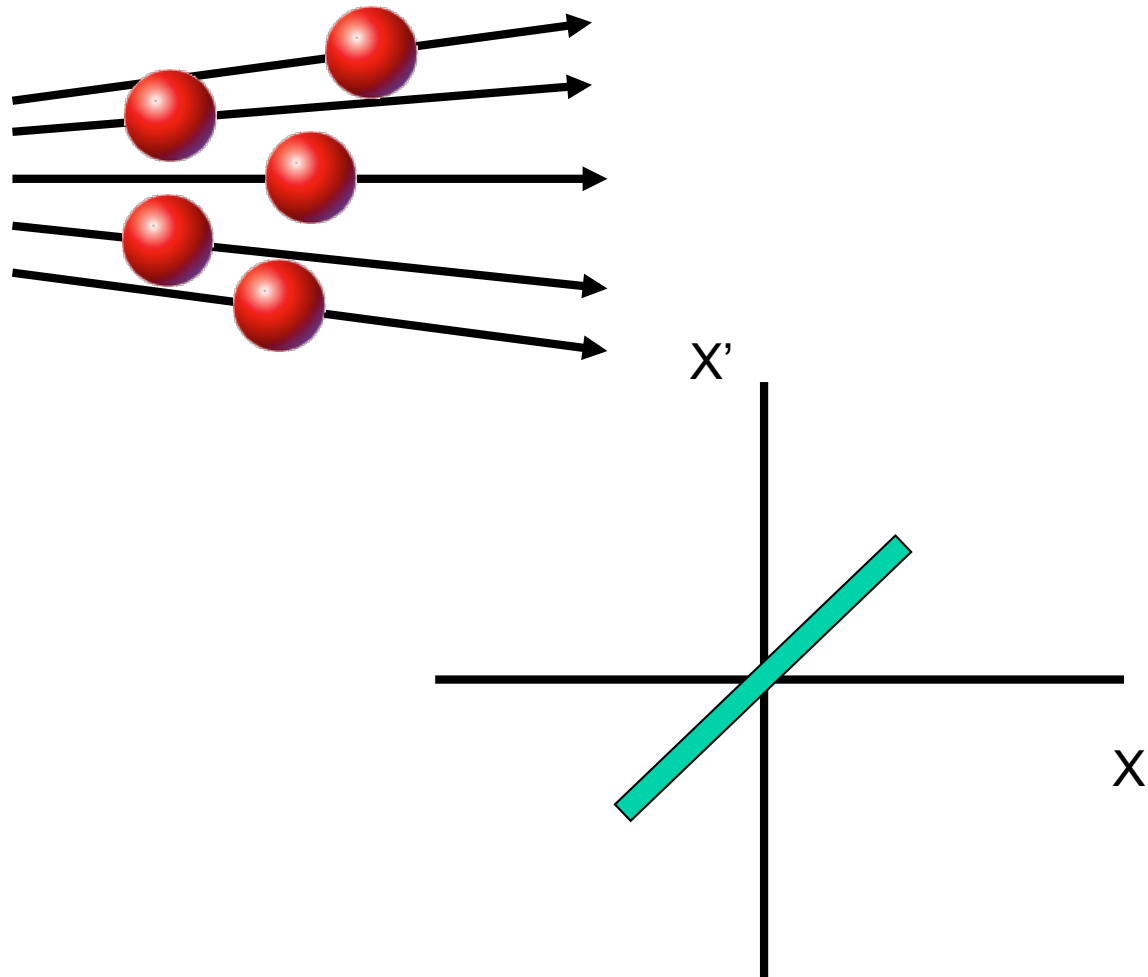

# Trace space of non laminar beam

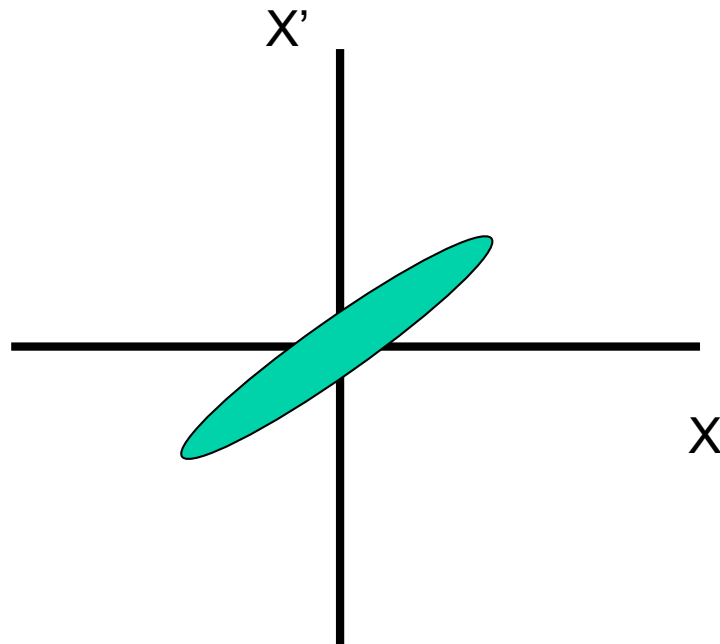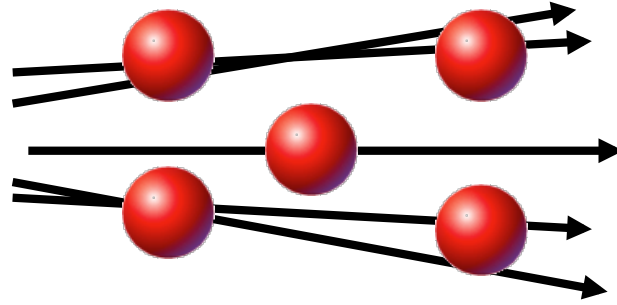

Geometric emittance:


$$\varepsilon_g$$


Ellipse equation:  $\gamma x^2 + 2\alpha x x' + \beta x'^2 = \varepsilon_g$

Twiss parameters:  $\beta\gamma - \alpha^2 = 1$        $\beta' = -2\alpha$

Ellipse area:


$$A = \pi\varepsilon_g$$

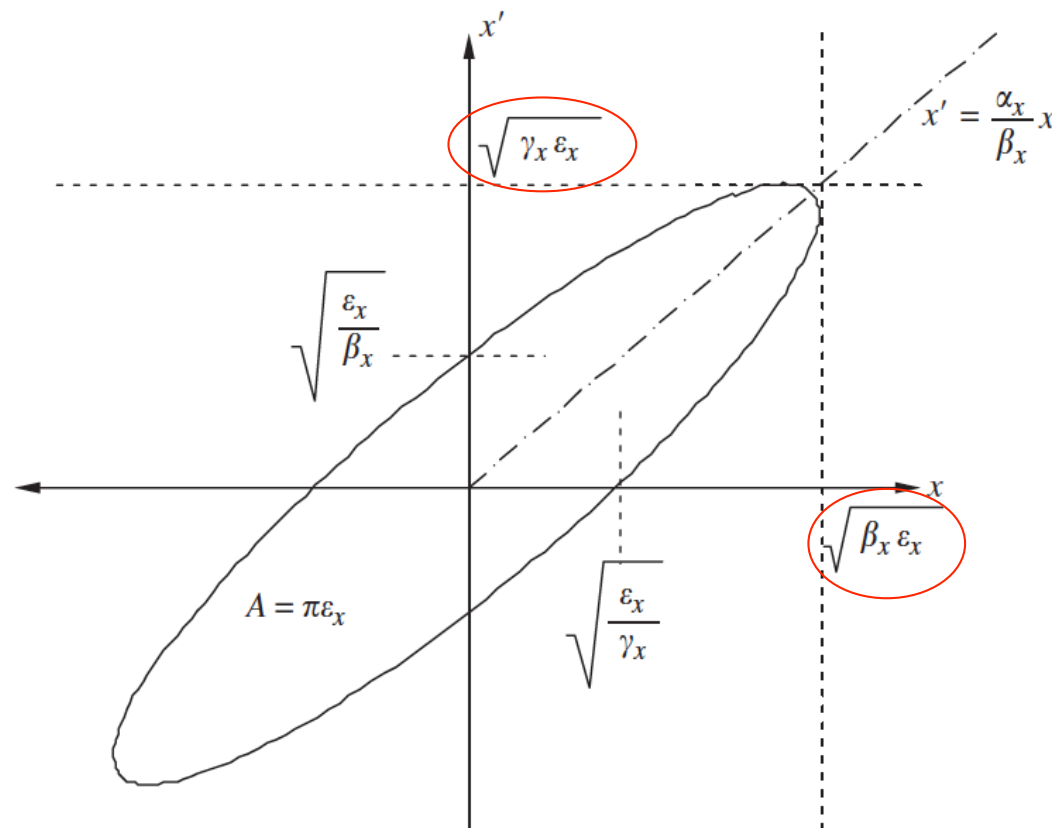

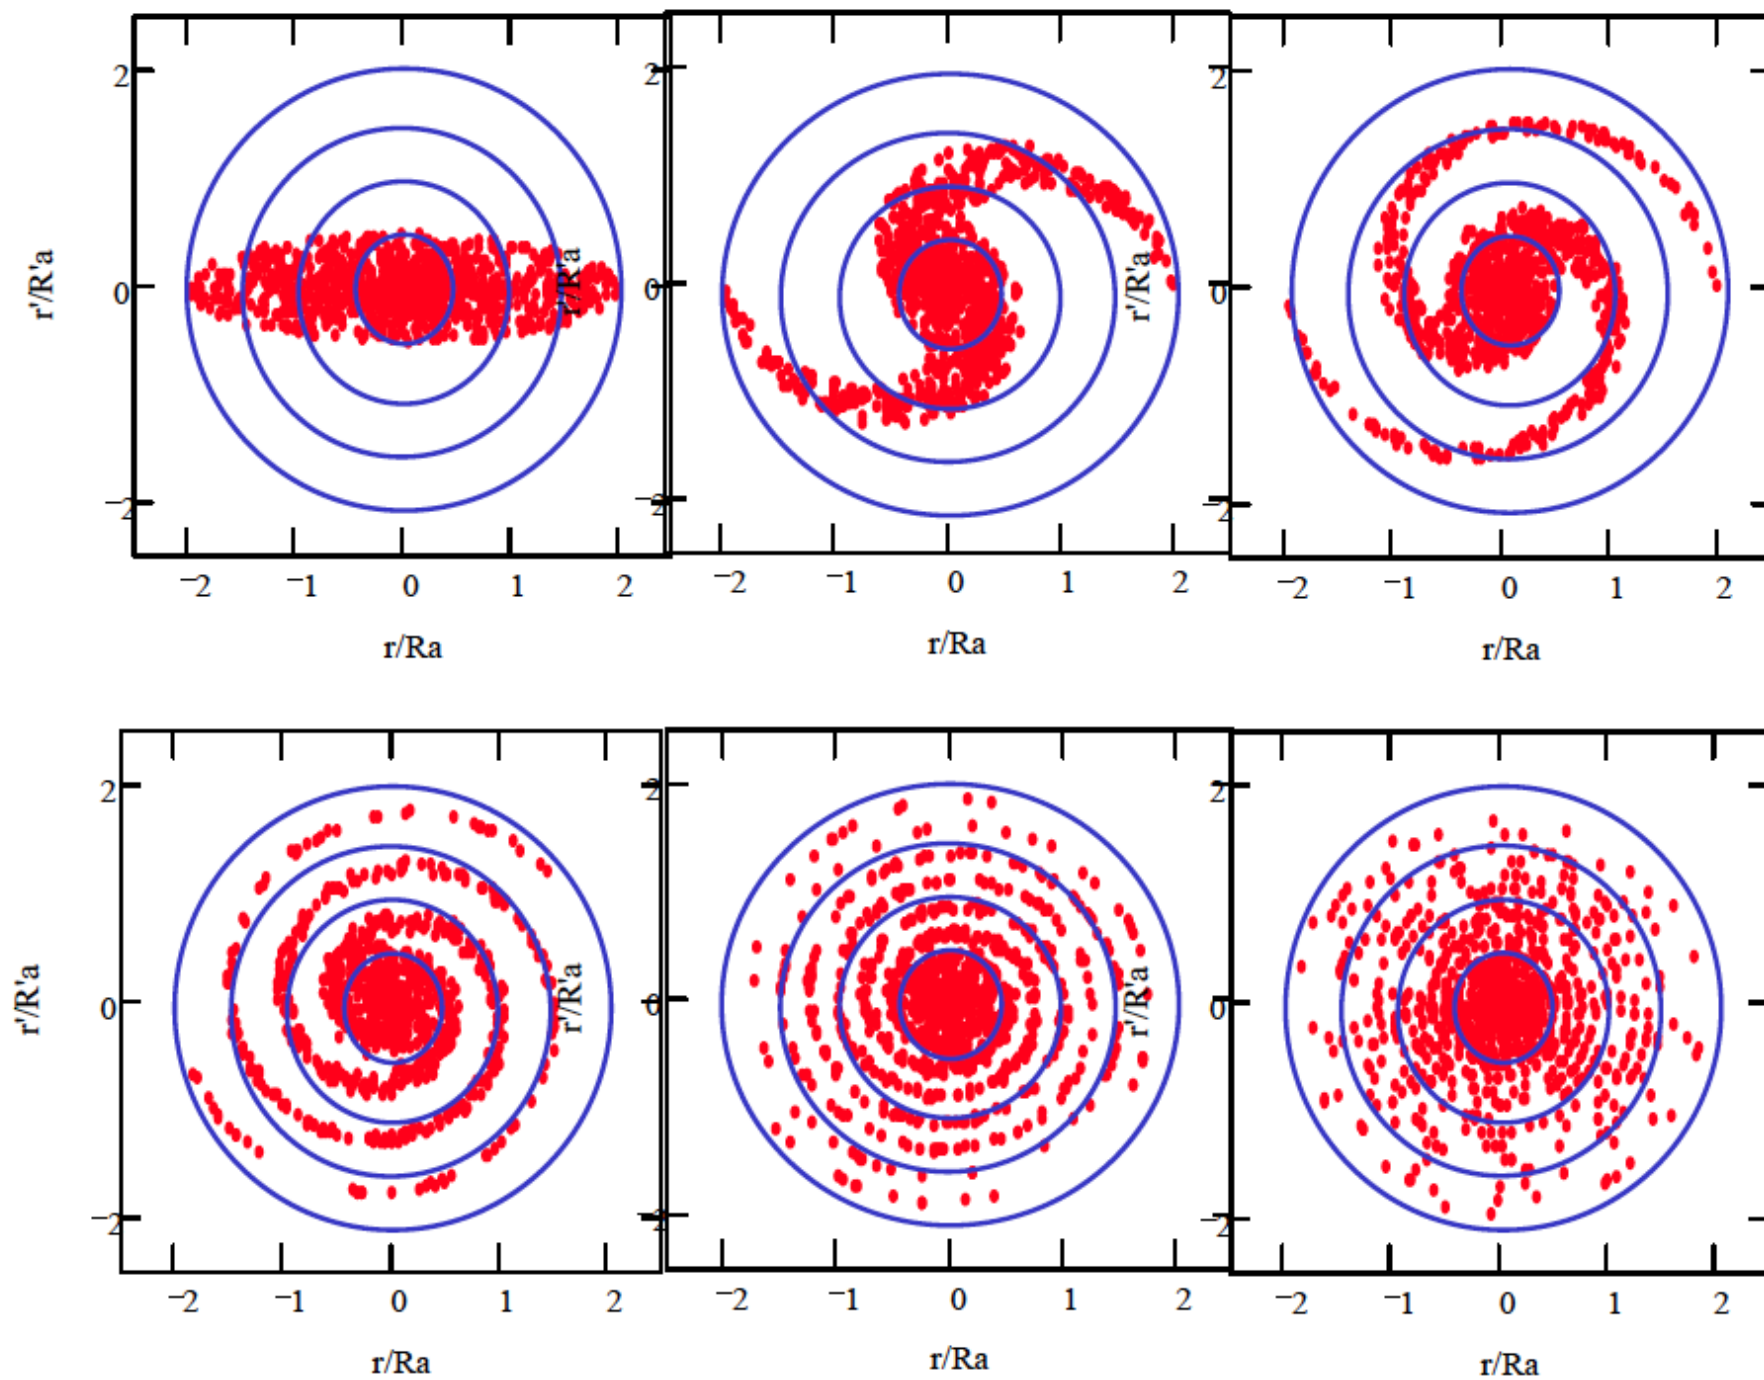


**Fig. 17:** Filamentation of mismatched beam in non-linear force


# Trace space evolution

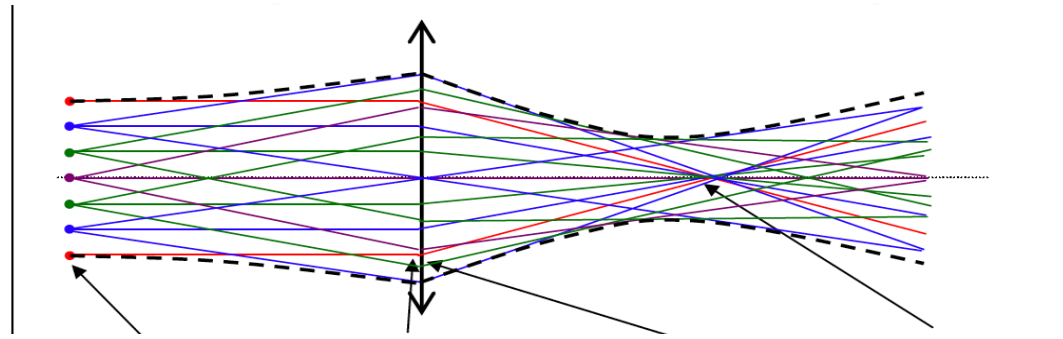

No space charge => **cross over**

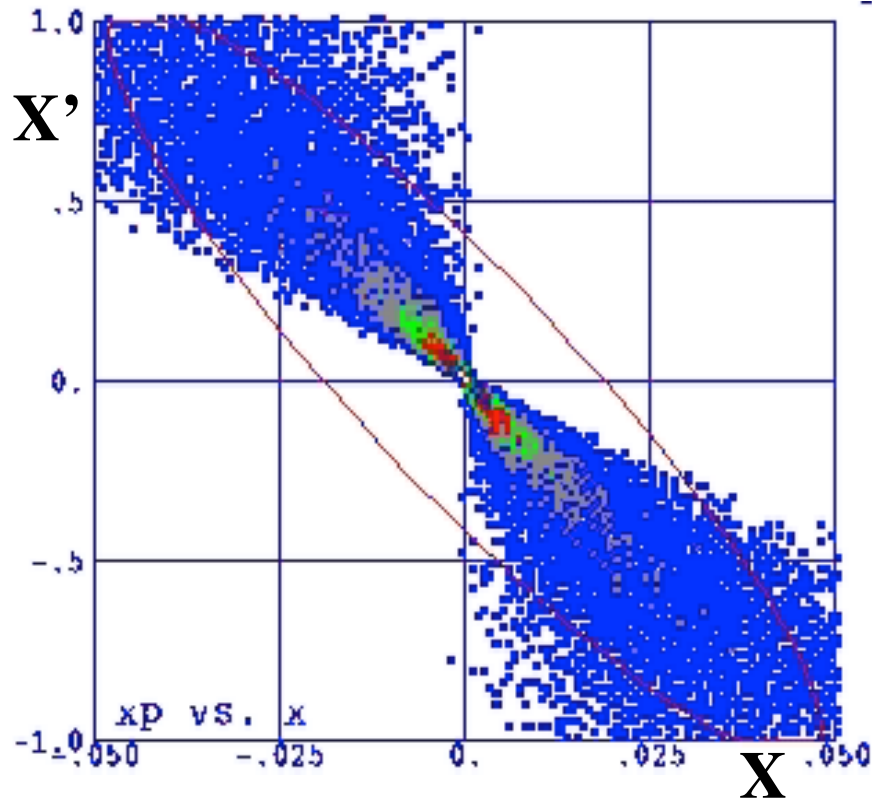


With space charge => **no cross over**

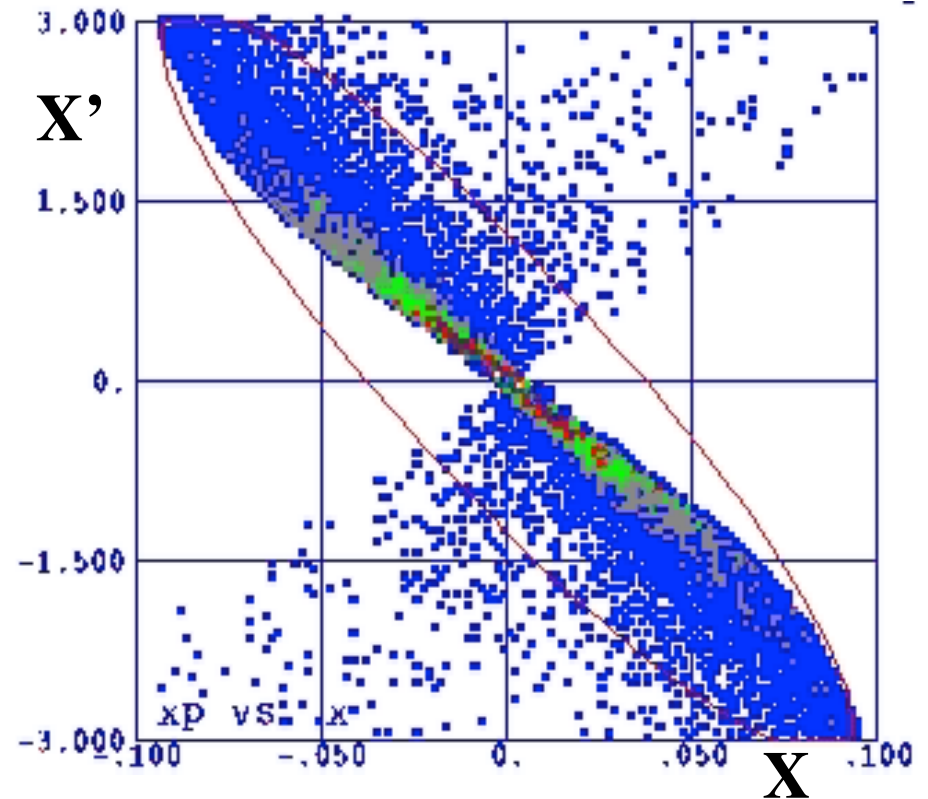



rms emittance

$$\mathcal{E}_{rms}$$

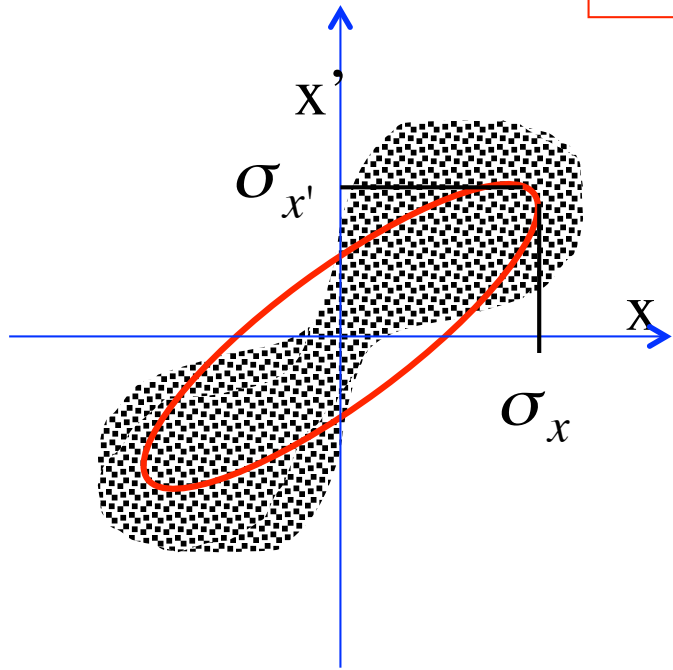

$$\int_{-\infty}^{+\infty} \int_{-\infty}^{+\infty} f(x, x') dx dx' = 1$$

$$f'(x, x') = 0$$

rms beam envelope:

$$\sigma_x^2 = \langle x^2 \rangle = \int_{-\infty}^{+\infty} \int_{-\infty}^{+\infty} x^2 f(x, x') dx dx'$$

Define rms emittance:

$$\gamma x^2 + 2\alpha x x' + \beta x'^2 = \mathcal{E}_{rms}$$

such that:

$$\sigma_x = \sqrt{\langle x^2 \rangle} = \sqrt{\beta \mathcal{E}_{rms}}$$

$$\sigma_{x'} = \sqrt{\langle x'^2 \rangle} = \sqrt{\gamma \mathcal{E}_{rms}}$$

Since:

$$\alpha = -\frac{\beta'}{2}$$

$$\beta = \frac{\langle x^2 \rangle}{\mathcal{E}_{rms}}$$

it follows:

$$\alpha = -\frac{1}{2\mathcal{E}_{rms}} \frac{d}{dz} \langle x^2 \rangle = -\frac{\langle x x' \rangle}{\mathcal{E}_{rms}} = -\frac{\sigma_{xx'}}{\mathcal{E}_{rms}}$$

$$\sigma_x = \sqrt{\langle x^2 \rangle} = \sqrt{\beta \mathcal{E}_{rms}}$$

$$\sigma_{x'} = \sqrt{\langle x'^2 \rangle} = \sqrt{\gamma \mathcal{E}_{rms}}$$

$$\sigma_{xx'} = \langle xx' \rangle = -\alpha \mathcal{E}_{rms}$$


It holds also the relation:  $\gamma\beta - \alpha^2 = 1$

Substituting  $\alpha, \beta, \gamma$  we get  $\frac{\sigma_{x'}^2}{\mathcal{E}_{rms}} \frac{\sigma_x^2}{\mathcal{E}_{rms}} - \left( \frac{\sigma_{xx'}}{\mathcal{E}_{rms}} \right)^2 = 1$


We end up with the definition of rms emittance in terms of the second moments of the distribution:

$$\mathcal{E}_{rms} = \sqrt{\sigma_x^2 \sigma_{x'}^2 - \sigma_{xx'}^2} = \sqrt{\left( \langle x^2 \rangle \langle x'^2 \rangle - \langle xx' \rangle^2 \right)}$$

Which distribution has no correlations?

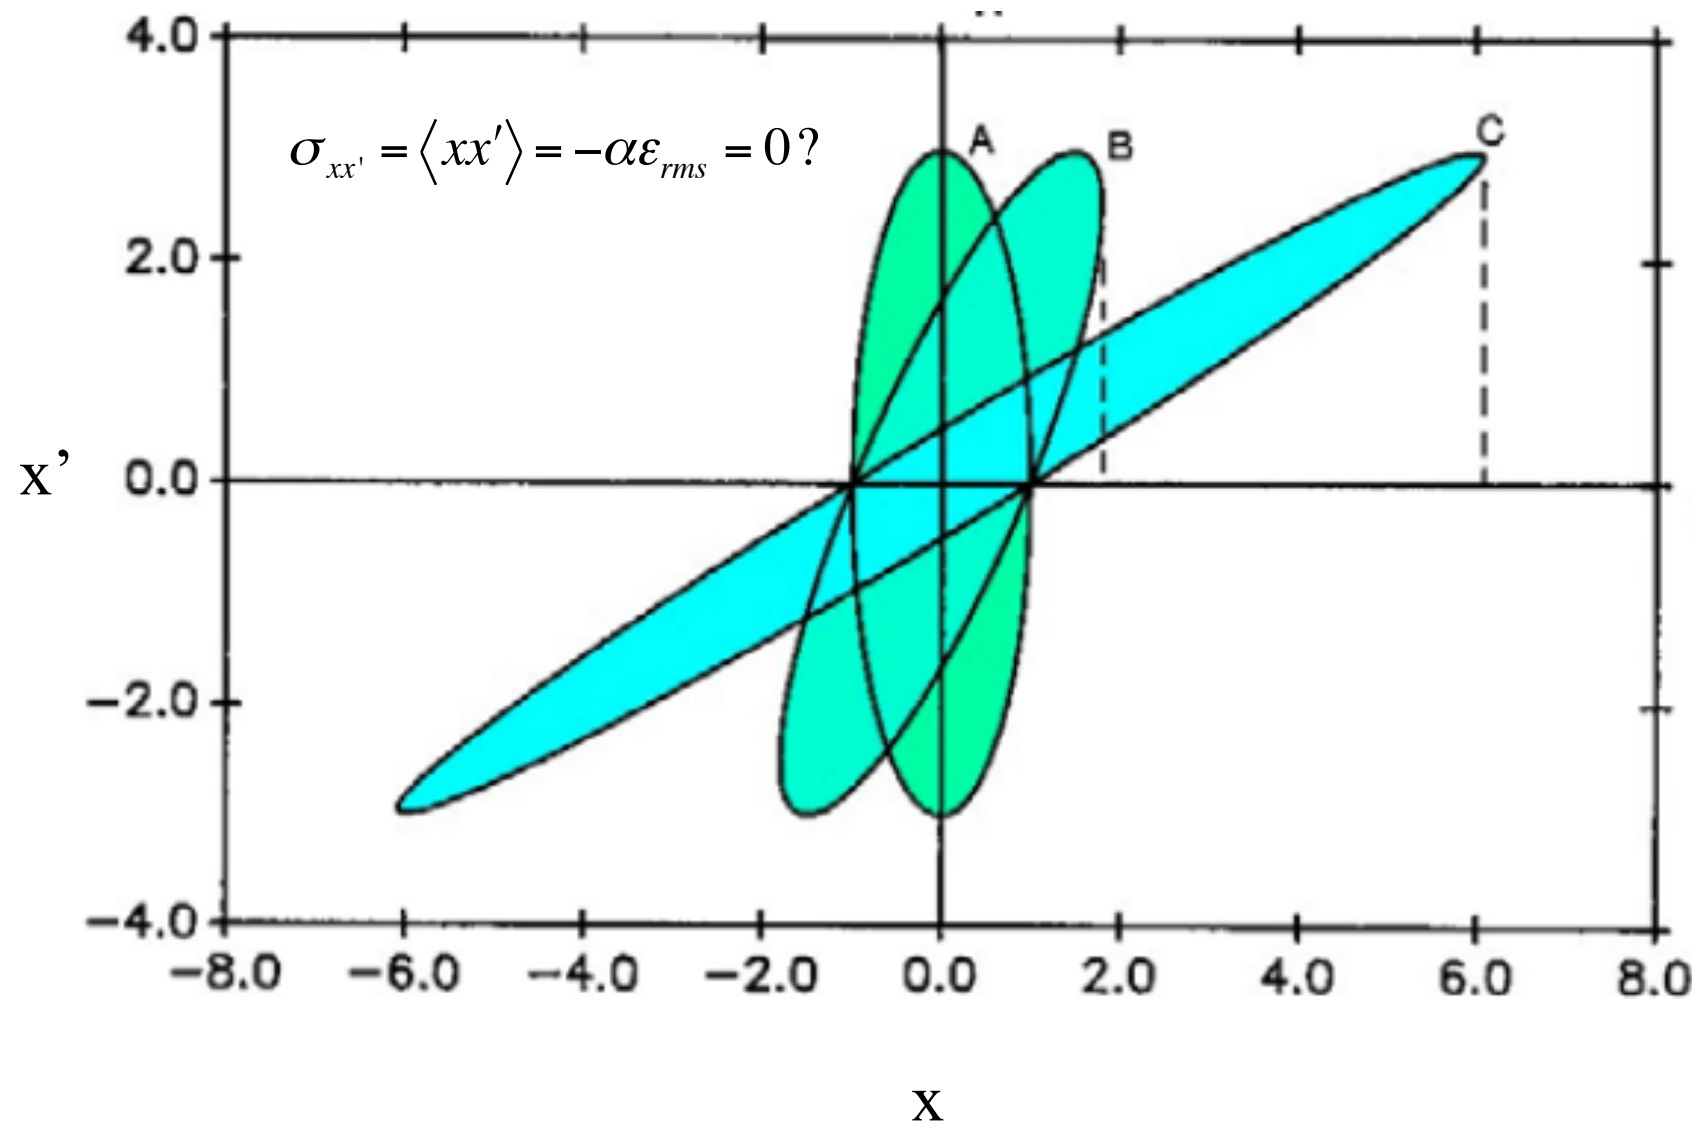

What does rms emittance tell us about phase space distributions under linear or non-linear forces acting on the beam?

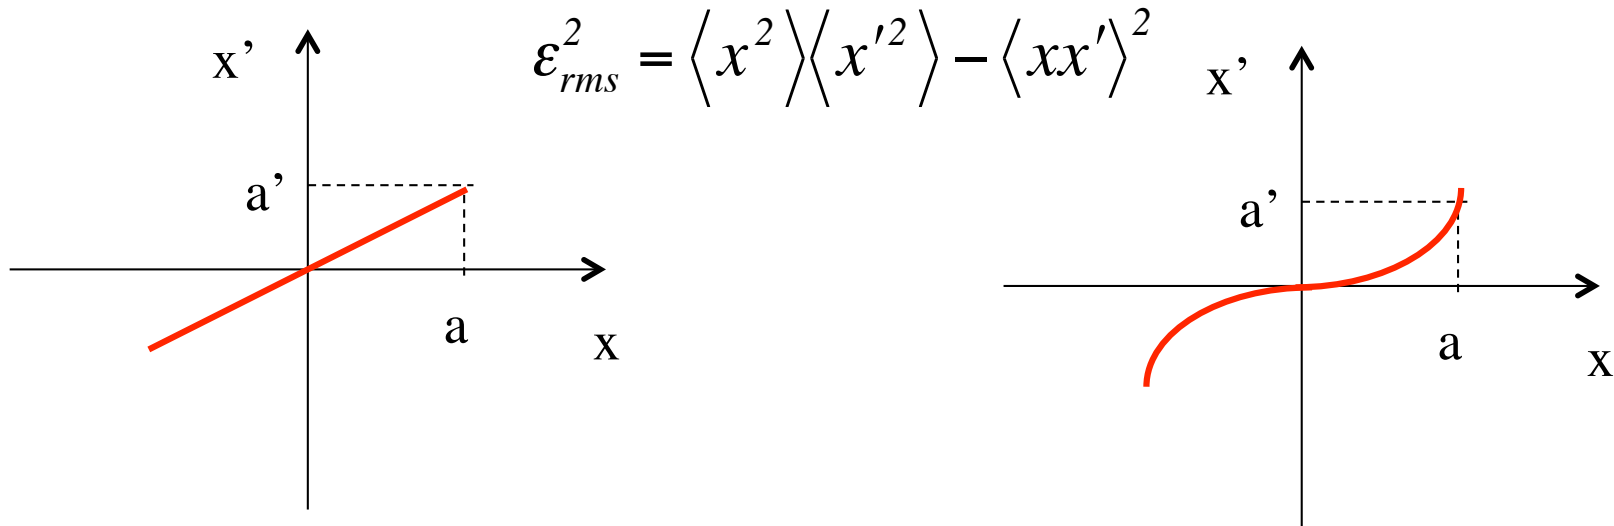

$$\epsilon_{rms}^2 = \langle x^2 \rangle \langle x'^2 \rangle - \langle xx' \rangle^2$$

Assuming a generic  $x, x'$  correlation of the type:  $x' = Cx^n$

$$\epsilon_{rms}^2 = C^2 \left( \langle x^2 \rangle \langle x^{2n} \rangle - \langle x^{n+1} \rangle^2 \right)$$

When  $n = 1 \implies \epsilon_{rms} = 0$

When  $n \neq 1 \implies \epsilon_{rms} \neq 0$

# Constant under linear transformation only

$$\frac{d}{dz} \langle x^2 \rangle \langle x'^2 \rangle - \langle xx' \rangle^2 = 2 \langle xx' \rangle \langle x'^2 \rangle + 2 \langle x^2 \rangle \langle x' \rangle \langle x'' \rangle - 2 \langle xx'' \rangle \langle xx' \rangle = 0$$

For linear transformations,  $x'' = -k_x^2 x$ , and the right-hand side of the equation is

$$2k_x^2 \langle x^2 \rangle \langle xx' \rangle - 2 \langle x^2 \rangle \langle xx' \rangle k_x^2 = 0,$$

so

$$\frac{d}{dz} \langle x^2 \rangle \langle x'^2 \rangle - \langle xx' \rangle^2 = 0$$

And without acceleration:

$$x' = \frac{p_x}{p_z}$$

Normalized rms emittance:  $\epsilon_{n,rms}$

Canonical transverse momentum:  $p_x = p_z x' = m_o c \beta \gamma x'$   $p_z \approx p$

$$\epsilon_{n,rms} = \frac{1}{m_o c} \sqrt{\sigma_x^2 \sigma_{p_x}^2 - \sigma_{xp_x}^2} = \frac{1}{m_o c} \sqrt{\left( \langle x^2 \rangle \langle p_x^2 \rangle - \langle xp_x \rangle^2 \right)} \approx \langle \beta \gamma \rangle \epsilon_{rms}$$

**Liouville theorem:** the density of particles  $n$ , or the volume  $V$  occupied by a given number of particles in phase space  $(x, p_x, y, p_y, z, p_z)$  **remains invariant under conservative forces.**

$$\frac{dn}{dt} = 0$$

It hold also in the projected phase spaces  $(x, p_x), (y, p_y), (z, p_z)$  **provided that there are no couplings**

# Limits of single particle emittance

Limits are set by Quantum Mechanics on the knowledge of the two conjugate variables ( $x, p_x$ ). According to Heisenberg:

$$\sigma_x \sigma_{p_x} \geq \frac{\hbar}{2}$$

This limitation can be expressed by saying that the state of a particle is not exactly represented by a point, but by a small uncertainty volume of the order of  $\hbar^3$  in the 6D phase space

.

In 2D it holds:

$$\varepsilon_{n,rms} = \frac{1}{m_o c} \sqrt{\sigma_x^2 \sigma_{p_x}^2 - \sigma_{xp_x}^2} = \begin{cases} 0 & \text{classical limit} \\ \geq \frac{1}{m_o c} \frac{\hbar}{2} = \frac{\lambda_c}{2} = 1.9 \times 10^{-13} m & \text{quantum limit} \end{cases}$$

# OUTLINE

- The rms emittance concept
- rms envelope equation
- Space charge forces
- Space charge induced emittance oscillations
- Matching conditions and emittance compensation



# Envelope Equation without Acceleration

Now take the derivatives:

$$\frac{d\sigma_x}{dz} = \frac{d}{dz} \sqrt{\langle x^2 \rangle} = \frac{1}{2\sigma_x} \frac{d}{dz} \langle x^2 \rangle = \frac{1}{2\sigma_x} 2\langle xx' \rangle = \frac{\sigma_{xx'}}{\sigma_x}$$

$$\frac{d^2\sigma_x}{dz^2} = \frac{d}{dz} \frac{\sigma_{xx'}}{\sigma_x} = \frac{1}{\sigma_x} \frac{d\sigma_{xx'}}{dz} - \frac{\sigma_{xx'}^2}{\sigma_x^3} = \frac{1}{\sigma_x} (\langle x'^2 \rangle + \langle xx'' \rangle) - \frac{\sigma_{xx'}^2}{\sigma_x^3} = \frac{\sigma_{x'}^2 + \langle xx'' \rangle}{\sigma_x} - \frac{\sigma_{xx'}^2}{\sigma_x^3}$$

And simplify:

$$\sigma_x'' = \frac{\sigma_x^2 \sigma_{x'}^2 - \sigma_{xx'}^2}{\sigma_x^3} + \frac{\langle xx'' \rangle}{\sigma_x} = \frac{\epsilon_{rms}^2}{\sigma_x^3} + \frac{\langle xx'' \rangle}{\sigma_x}$$

We obtain the rms envelope equation in which the rms emittance enters as defocusing pressure like term.

$$\sigma_x'' - \frac{\langle xx'' \rangle}{\sigma_x} = \frac{\epsilon_{rms}^2}{\sigma_x^3}$$

$$\sigma_x'' - \frac{\langle xx'' \rangle}{\sigma_x} = \frac{\epsilon_{rms}^2}{\sigma_x^3}$$

Assuming that each particle is subject only to a linear focusing force, without acceleration:  $x'' + k_x^2 x = 0$

take the average over the entire particle ensemble  $\langle xx'' \rangle = -k_x^2 \langle x^2 \rangle$

$$\sigma_x'' + k_x^2 \sigma_x = \frac{\epsilon_{rms}^2}{\sigma_x^3}$$

We obtain the rms envelope equation with a linear focusing force in which the rms emittance enters as defocusing pressure like term.

$$\frac{\epsilon_{rms}^2}{\sigma_x^3} \approx \frac{T}{V} \approx P$$

# Beam Thermodynamics

Kinetic theory of gases defines temperatures in each directions and global as:

$$k_B T_x = m \langle v_x^2 \rangle \quad T = \frac{1}{3} (T_x + T_y + T_z) \quad E_k = \frac{1}{2} m \langle v^2 \rangle = \frac{3}{2} k_B T$$



Definition of beam temperature in analogy:

$$k_B T_{beam,x} = m_o \langle v_x^2 \rangle \quad \langle v_x^2 \rangle = (\beta\gamma c)^2 \langle x'^2 \rangle = (\beta\gamma c)^2 (\gamma_x \epsilon_{x,rms})$$

We get:

$$k_B T_{beam,x} = m_o c^2 (\beta\gamma)^2 (\gamma_x \epsilon_{x,rms})$$

$$k_B T_{beam,x} = m_o c^2 (\beta\gamma)^2 (\gamma_x \epsilon_{x,rms})$$
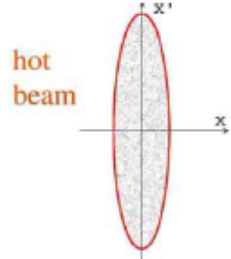
| Property  | Hot beam   | Cold beam  |
|---|--|--|
| ion mass ( $m_o$ )  | heavy ion  | light ion  |
| ion energy ( $\beta\gamma$ )                                | high energy  | low energy   |
| beam emittance ( $\epsilon$ )                               | large emittance  | small emittance  |
| lattice properties ( $\gamma_{x,y} \approx 1/\beta_{x,y}$ ) | strong focus (low $\beta$ )  | high $\beta$   |
| phase space portrait  |  <p>hot beam</p> |  <p>cold beam</p> |

**Electron Cooling: Temperature relaxation by mixing a hot ion beam with co-moving cold (light) electron beam.**

*Particle Accelerators*  
1973, Vol. 5, pp. 61–65

© Gordon and Breach, Science Publishers Ltd.  
Printed in Glasgow, Scotland

### EMITTANCE, ENTROPY AND INFORMATION

J. D. LAWSON

*Rutherford Laboratory, Chilton, Berkshire, England*

P. M. LAPOSTOLLE

*Centre National d'Études des Télécommunications, Issy-les-Moulineaux, France*

and

R. L. GLUCKSTERN

*Department of Physics and Astronomy, University of Massachusetts, Amherst, Mass. USA*

$$S = kN \log(\pi\epsilon)$$


# OUTLINE

- The rms emittance concept
- rms envelope equation
- **Space charge forces**
- Space charge induced emittance oscillations
- Matching conditions and emittance compensation


# Space Charge: what does it mean?

The net effect of the **Coulomb** interactions in a multi-particle system can be classified into two regimes:


- 1) **Collisional Regime** ==> dominated by **binary collisions** caused by close particle encounters ==> **Single Particle Effects**

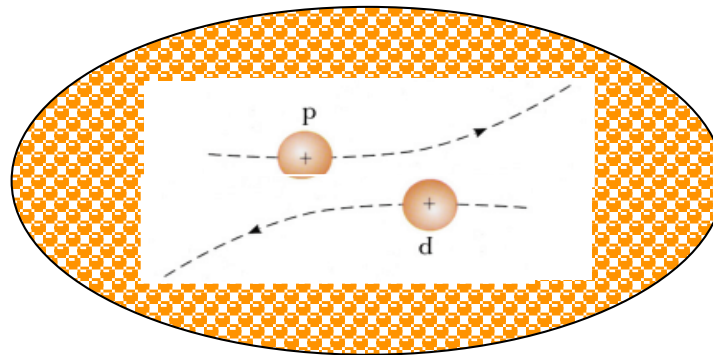

- 2) **Space Charge Regime** ==> dominated by the **self field** produced by the particle distribution, which varies appreciably only over large distances compare to the average separation of the particles ==> **Collective Effects**

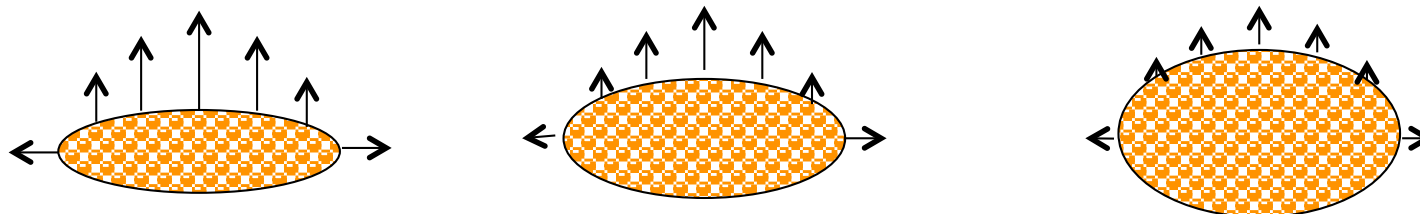

# Continuous Uniform Cylindrical Beam Model

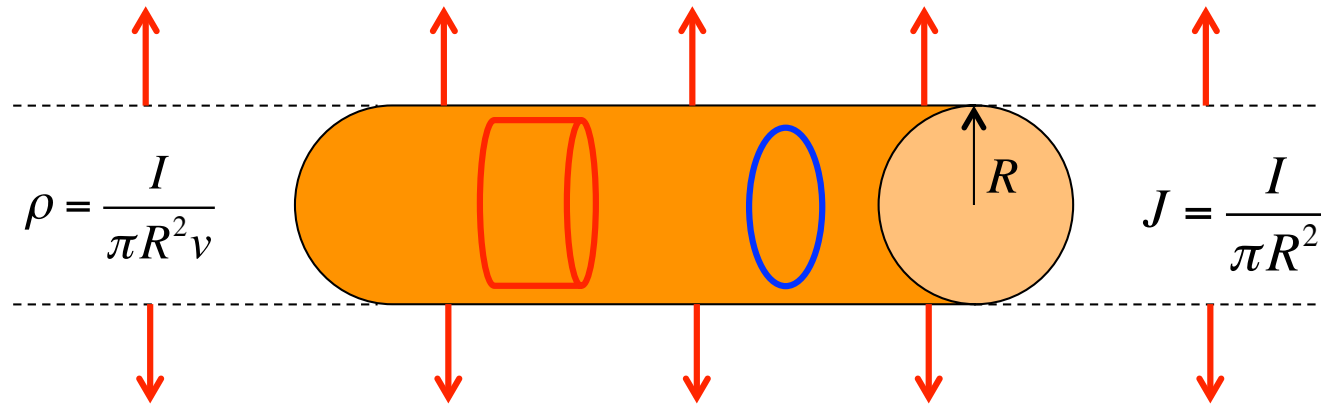

## Gauss' s law

$$\int \epsilon_0 E \cdot dS = \int \rho dV$$

$$E_r = \frac{I}{2\pi\epsilon_0 R^2 v} r \quad \text{for } r \leq R$$

$$E_r = \frac{I}{2\pi\epsilon_0 v r} \quad \text{for } r > R$$

$$B_\vartheta = \frac{\beta}{c} E_r$$


## Ampere' s law

$$\int B \cdot dl = \mu_0 \int J \cdot dS$$

$$B_\vartheta = \mu_0 \frac{I r}{2\pi R^2} \quad \text{for } r \leq R$$

$$B_\vartheta = \mu_0 \frac{I}{2\pi r} \quad \text{for } r > R$$

## Bunched Uniform Cylindrical Beam Model

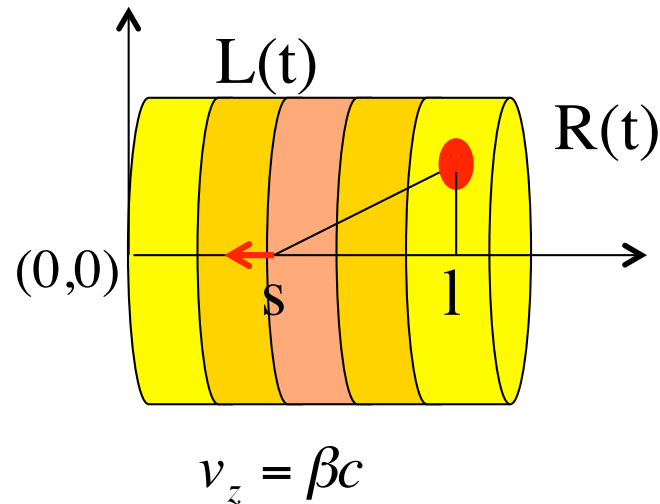

Longitudinal Space Charge field in the bunch moving frame:

$$\tilde{\rho} = \frac{Q}{\pi R^2 \tilde{L}} \quad \tilde{E}_z(\tilde{s}, r=0) = \frac{\tilde{\rho}}{4\pi\epsilon_0} \int_0^R \int_0^{2\pi} \int_0^{\tilde{L}} \frac{(\tilde{l} - \tilde{s})}{\left[ (\tilde{l} - \tilde{s})^2 + r^2 \right]^{3/2}} r dr d\varphi d\tilde{l}$$

$$\tilde{E}_z(\tilde{s}, r=0) = \frac{\tilde{\rho}}{2\epsilon_0} \left[ \sqrt{R^2 + (\tilde{L} - \tilde{s})^2} - \sqrt{R^2 + \tilde{s}^2} + (2\tilde{s} - \tilde{L}) \right]$$



Radial Space Charge field in the bunch moving frame

by series representation of axisymmetric field:

$$\tilde{E}_r(r, \tilde{s}) \cong \left[ \frac{\tilde{\rho}}{\varepsilon_0} - \frac{\partial}{\partial \tilde{s}} \tilde{E}_z(0, \tilde{s}) \right] \frac{r}{2} + [\dots] \frac{r^3}{16} +$$

$$\tilde{E}_r(r, \tilde{s}) = \frac{\tilde{\rho}}{2\varepsilon_0} \left[ \frac{(\tilde{L} - \tilde{s})}{\sqrt{R^2 + (\tilde{L} - \tilde{s})^2}} + \frac{\tilde{s}}{\sqrt{R^2 + \tilde{s}^2}} \right] \frac{r}{2}$$

## Lorentz Transformation to the Lab frame

$$\begin{aligned} E_z &= \tilde{E}_z & \tilde{L} = \gamma L &\Rightarrow \tilde{\rho} = \frac{\rho}{\gamma} \\ E_r &= \gamma \tilde{E}_r & \tilde{s} &= \gamma s \end{aligned}$$

$$E_z(0, s) = \frac{\rho}{\gamma 2\epsilon_0} \left[ \sqrt{R^2 + \gamma^2 (L - s)^2} - \sqrt{R^2 + \gamma^2 s^2} + \gamma(2s - L) \right]$$



$$E_r(r, s) = \frac{\gamma\rho}{2\epsilon_0} \left[ \frac{(L - s)}{\sqrt{R^2 + \gamma^2 (L - s)^2}} + \frac{s}{\sqrt{R^2 + \gamma^2 s^2}} \right] \frac{r}{2}$$

**It is still a linear field with r but with a longitudinal correlation s**

# Bunched Uniform Cylindrical Beam Model

$$E_z(0, s, \gamma) = \frac{I}{2\pi\gamma\epsilon_0 R^2 \beta c} h(s, \gamma)$$

$$E_r(r, s, \gamma) = \frac{Ir}{2\pi\epsilon_0 R^2 \beta c} g(s, \gamma)$$

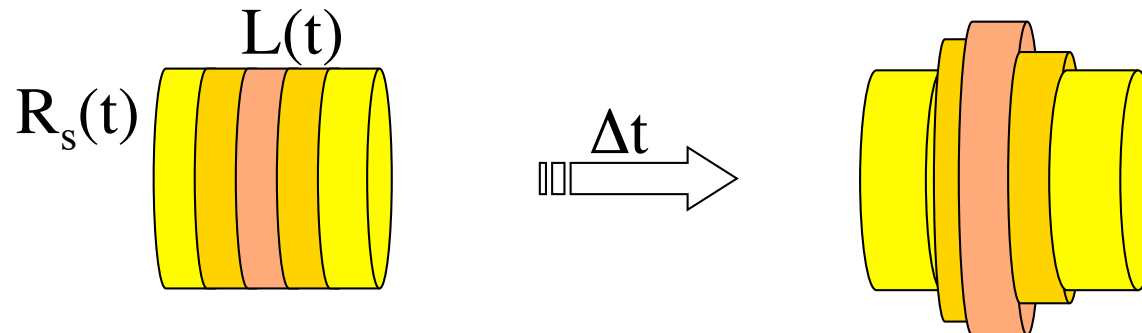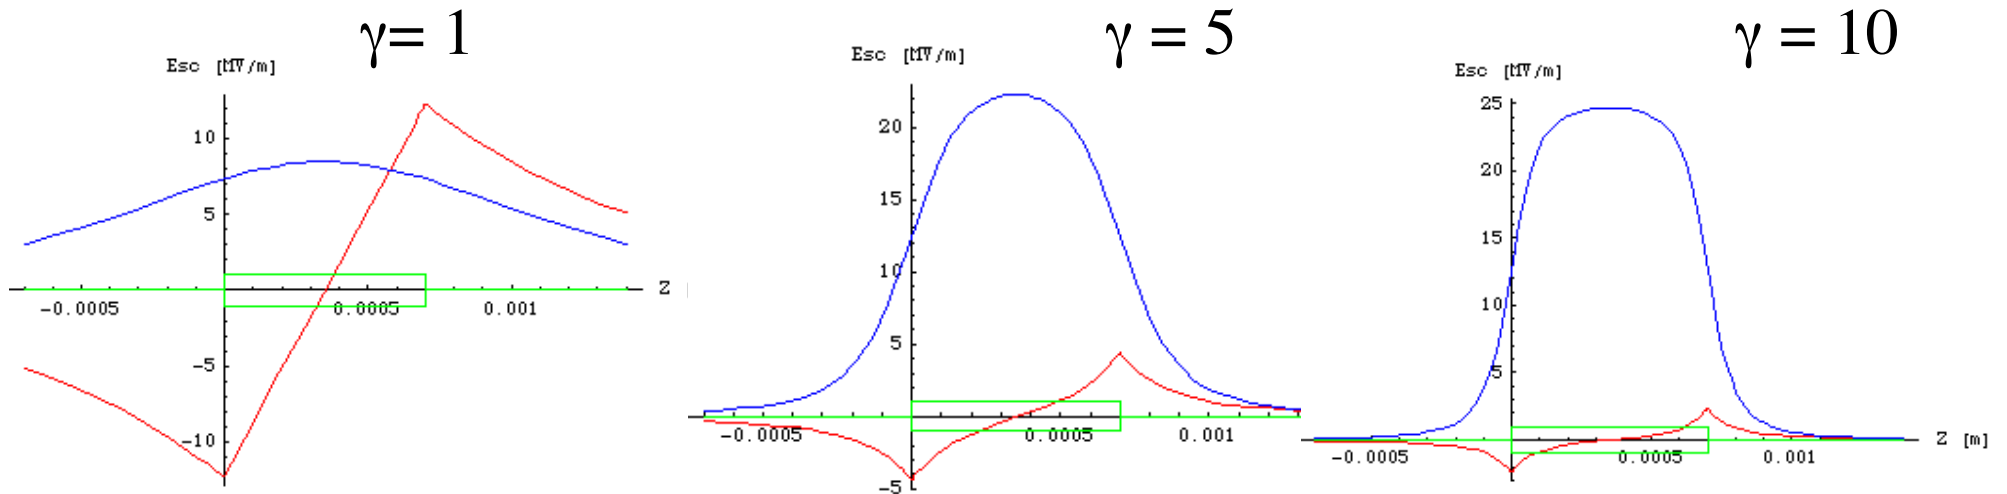

# Lorentz Force

$$F_r = e(E_r - \beta c B_\vartheta) = e(1 - \beta^2)E_r = \frac{eE_r}{\gamma^2}$$

is a **linear** function of the transverse coordinate

$$\frac{dp_r}{dt} = F_r = \frac{eE_r}{\gamma^2} = \frac{eI r}{2\pi\gamma^2 \epsilon_0 R^2 \beta c} g(s, \gamma)$$

The attractive magnetic force , which becomes significant at high velocities, tends to compensate for the repulsive electric force. **Therefore space charge defocusing is primarily a non-relativistic effect.**

$$F_x = \frac{eIx}{2\pi\gamma^2 \epsilon_0 \sigma_x^2 \beta c} g(s, \gamma)$$

# Envelope Equation with Space Charge

Single particle transverse motion:

$$\frac{dp_x}{dt} = F_x \quad p_x = p \quad x' = \beta\gamma m_0 c x'$$

$$\frac{d}{dt}(p x') = \beta c \frac{d}{dz}(p x') = F_x$$

$$x'' = \frac{F_x}{\beta c p}$$

$$F_x = \frac{e I x}{2\pi\gamma^2 \epsilon_0 \sigma_x^2 \beta c} g(s, \gamma)$$

$$x'' = \frac{k_{sc}(s, \gamma)}{\sigma_x^2} x$$

$$k_{sc} = \frac{2I}{I_A} g(s, \gamma)$$

$$I_A = \frac{4\pi\epsilon_0 m_0 c^3}{e}$$

Now we can calculate the term  $\langle xx'' \rangle$  that enters in the envelope equation

$$\sigma_x'' = \frac{\varepsilon_{rms}^2}{\sigma_x^3} + \frac{\langle xx'' \rangle}{\sigma_x}$$

$$x'' = \frac{k_{sc}}{\sigma_x^2} x$$

$$\langle xx'' \rangle = \frac{k_{sc}}{\sigma_x^2} \langle x^2 \rangle = k_{sc}$$

Including all the other terms the envelope equation reads:

**Space Charge De-focusing Force**

$$\sigma_x'' + k^2 \sigma_x = \frac{\varepsilon_n^2}{(\beta\gamma)^2 \sigma_x^3} + \frac{k_{sc}}{\sigma_x}$$

Emittance Pressure

External Focusing Forces


Laminarity Parameter: 
$$\rho = \frac{(\beta\gamma)^2 k_{sc} \sigma_x^2}{\varepsilon_n^2}$$

# The beam undergoes two regimes along the accelerator

$$\sigma_x'' + k^2 \sigma_x = \frac{\cancel{\varepsilon_n^2}}{\cancel{(\beta\gamma)^2} \sigma_x^3} + \frac{k_{sc}}{\sigma_x}$$

$\rho \gg 1$


Laminar Beam

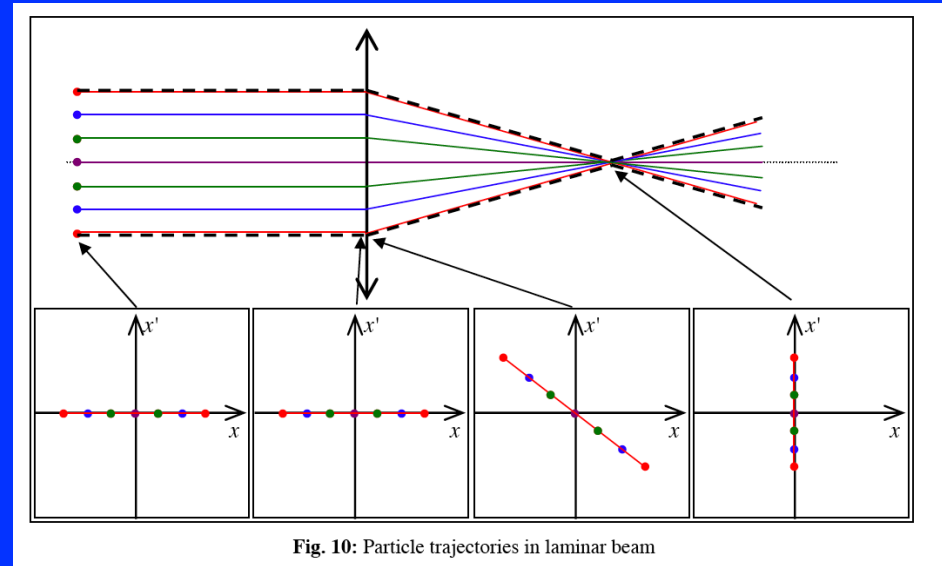

$$\sigma_x'' + k^2 \sigma_x = \frac{\varepsilon_n^2}{(\beta\gamma)^2 \sigma_x^3} + \cancel{\frac{k_{sc}}{\sigma_x}}$$

$\rho \ll 1$

Thermal Beam

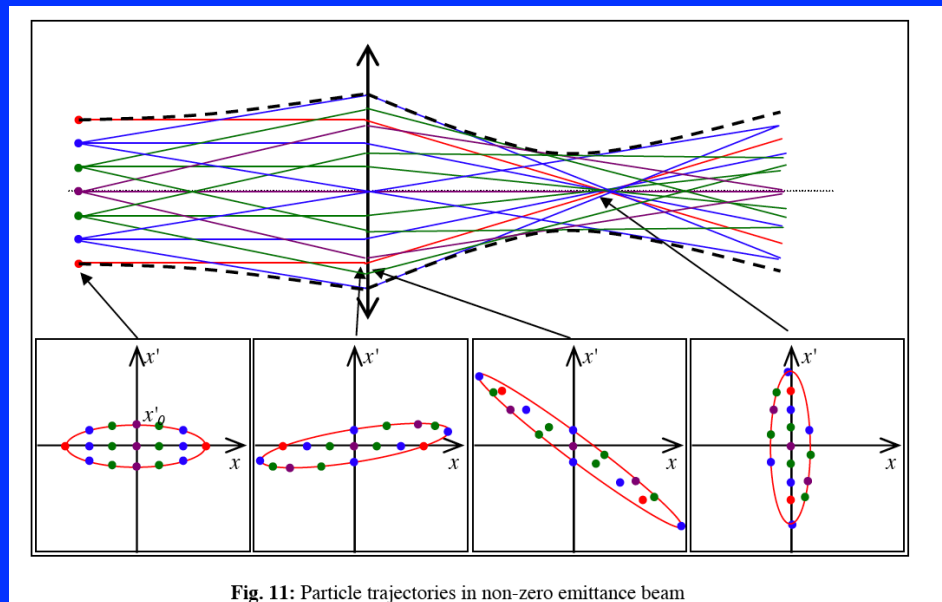

# OUTLINE

- The rms emittance concept
- rms envelope equation
- Space charge forces
- **Space charge induced emittance oscillations**
- Matching conditions and emittance compensation



Surface charge density

$$\sigma = e n \delta x$$

Surface electric field

$$E_x = -\sigma/\epsilon_0 = -e n \delta x/\epsilon_0$$

Restoring force


$$m \frac{d^2 \delta x}{dt^2} = e E_x = -m \omega_p^2 \delta x$$

Plasma frequency

$$\omega_p^2 = \frac{n e^2}{\epsilon_0 m}$$


Plasma oscillations

$$\delta x = (\delta x)_0 \cos(\omega_p t)$$

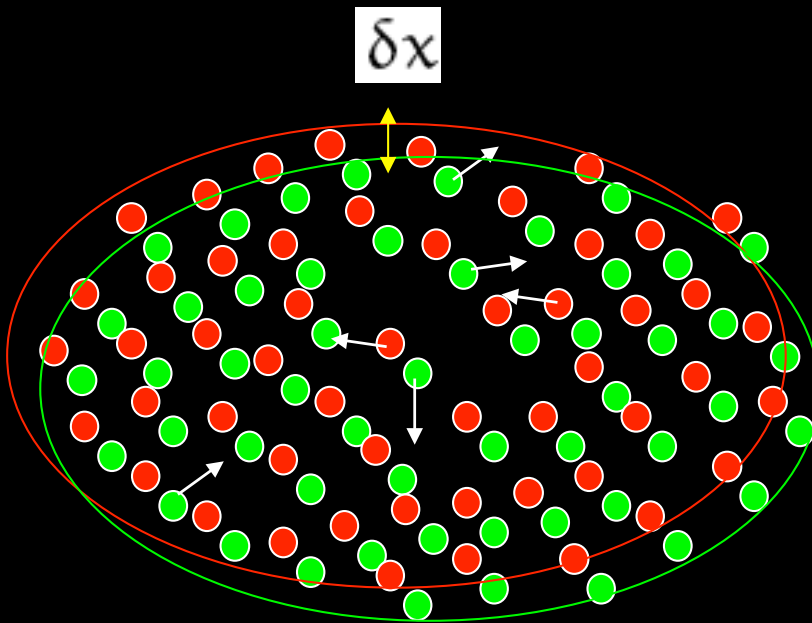


# Neutral Plasma

- Oscillations
- Instabilities
- EM Wave propagation

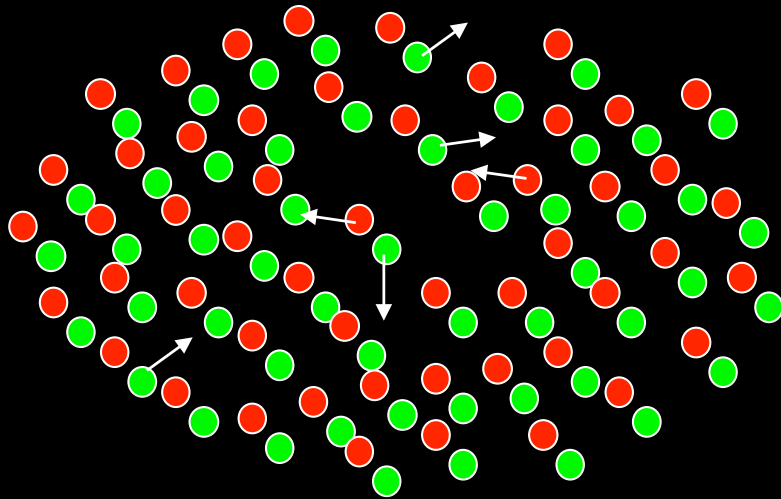

# Single Component Cold Relativistic Plasma

Magnetic focusing

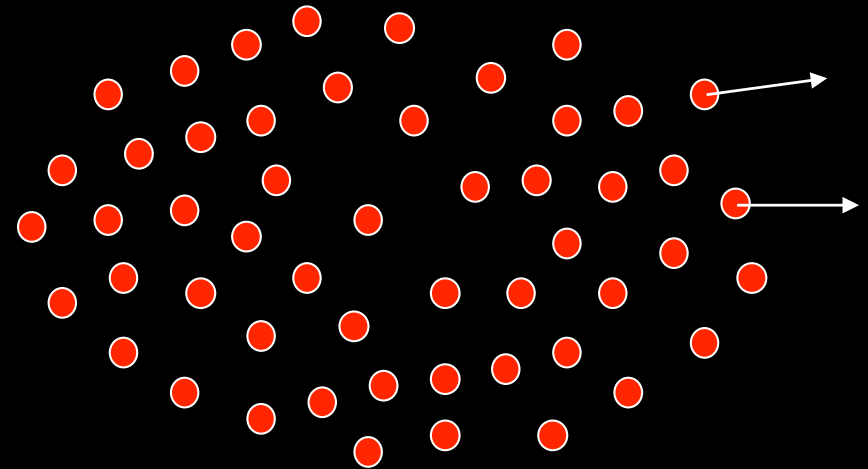

Magnetic focusing

# Single Component Relativistic Plasma

$$\sigma'' + k_s^2 \sigma = \frac{k_{sc}(s, \gamma)}{\sigma}$$

Equilibrium solution:

$$\sigma_{eq}(s, \gamma) = \frac{\sqrt{k_{sc}(s, \gamma)}}{k_s}$$

$$k_s = \frac{qB}{2mc\beta\gamma}$$

Small perturbation:


$$\sigma(\xi) = \sigma_{eq}(s) + \delta\sigma(s)$$

$$\delta\sigma''(s) + 2k_s^2 \delta\sigma(s) = 0$$


$$\delta\sigma(s) = \delta\sigma_o(s) \cos(\sqrt{2}k_s z)$$

Perturbed trajectories oscillate around the equilibrium with the same frequency but with different amplitudes:

$$\sigma(s) = \sigma_{eq}(s) + \delta\sigma_o(s) \cos(\sqrt{2}k_s z)$$

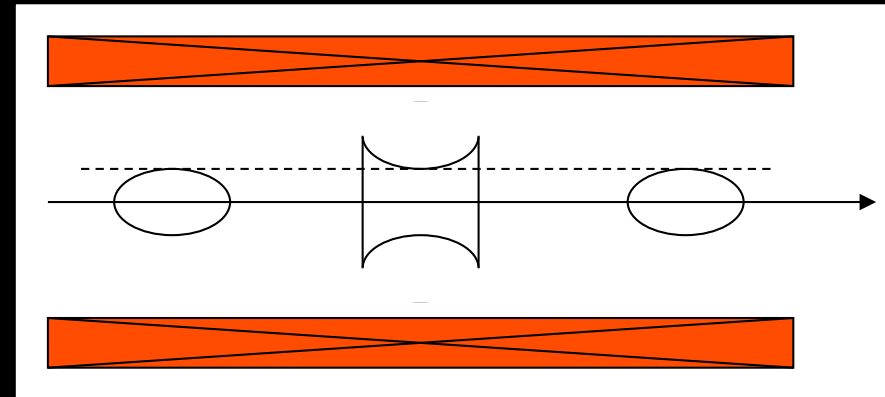



## Continuous solenoid channel

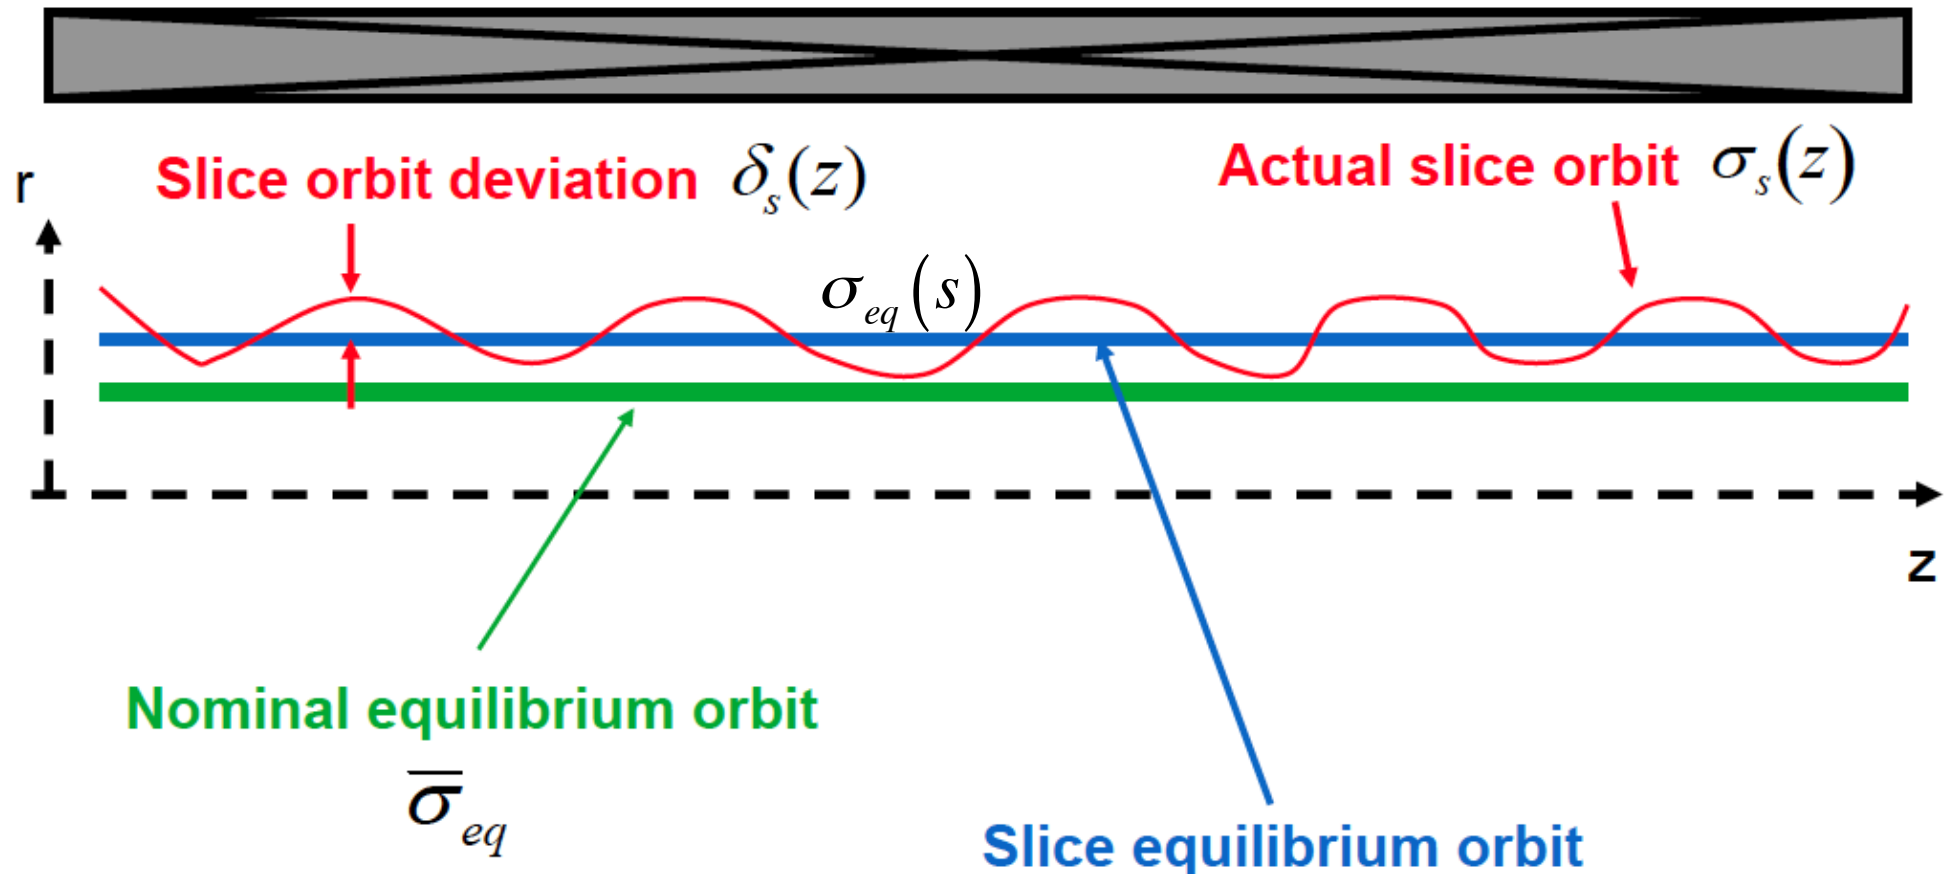

Perturbed trajectories oscillate around the equilibrium with the same frequency but with different amplitudes:



$$\sigma(s) = \sigma_{eq}(s) + \delta\sigma_o(s) \cos(\sqrt{2}k_s z)$$

# Envelope oscillations drive Emittance oscillations

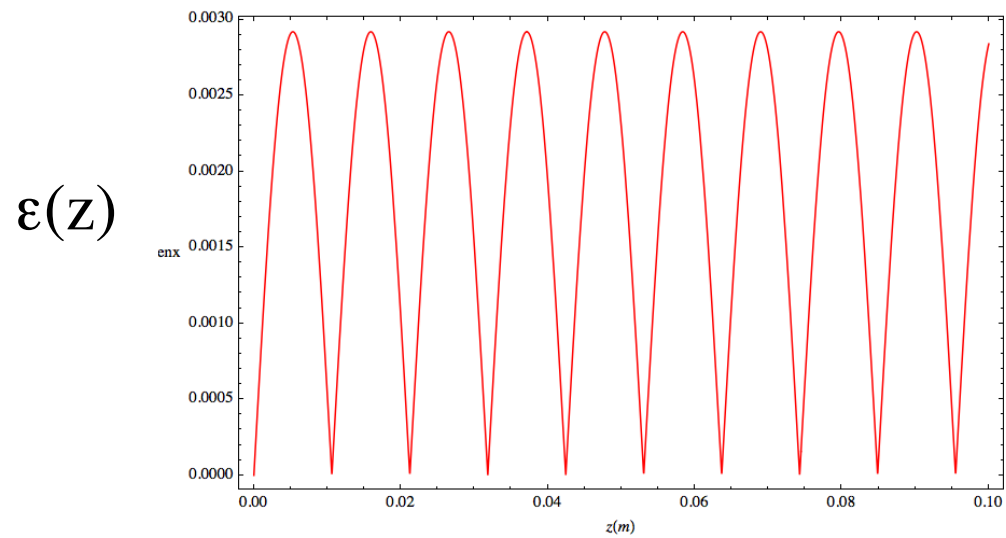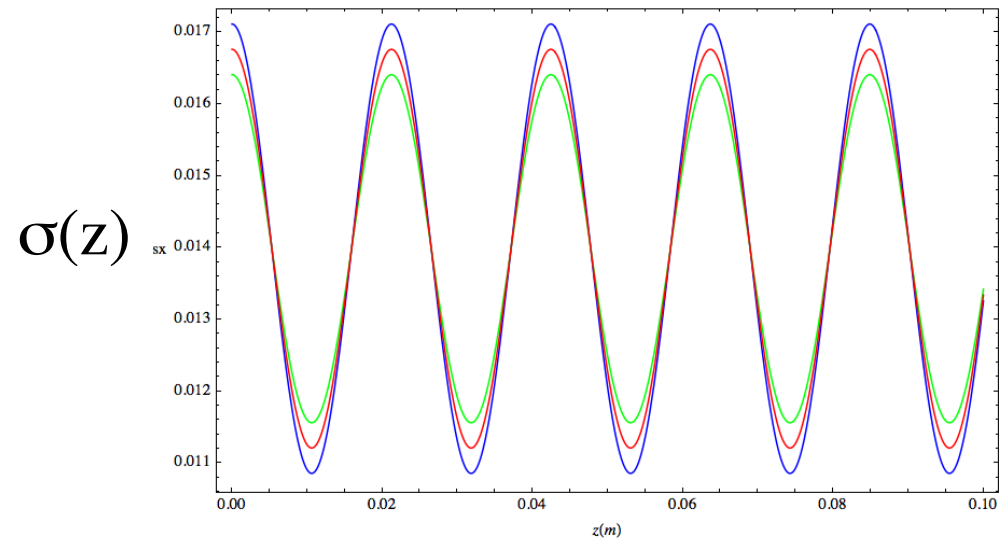


$$\varepsilon_{rms} = \sqrt{\sigma_x^2 \sigma_{x'}^2 - \sigma_{xx'}^2} = \sqrt{\left( \langle x^2 \rangle \langle x'^2 \rangle - \langle xx' \rangle^2 \right)} \approx \left| \sin(\sqrt{2} k_s z) \right|$$

# Energy spread induces decoherence

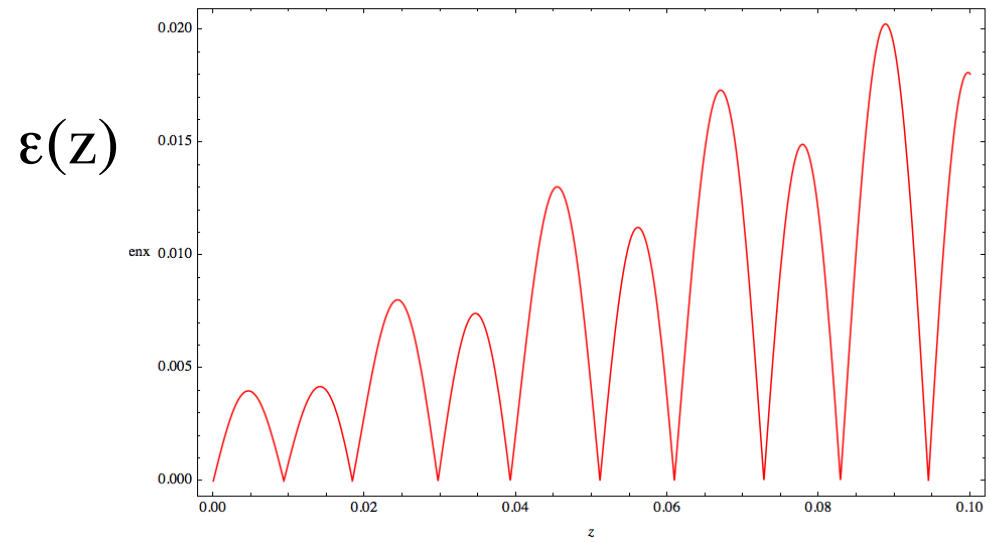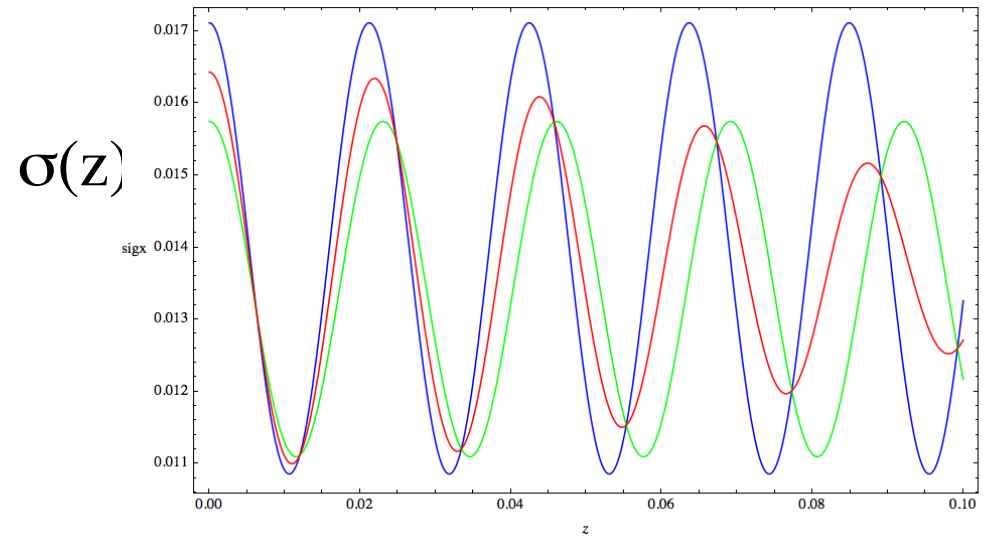



# Emittance Oscillations are driven by space charge differential defocusing in core and tails of the beam

Projected Phase Space

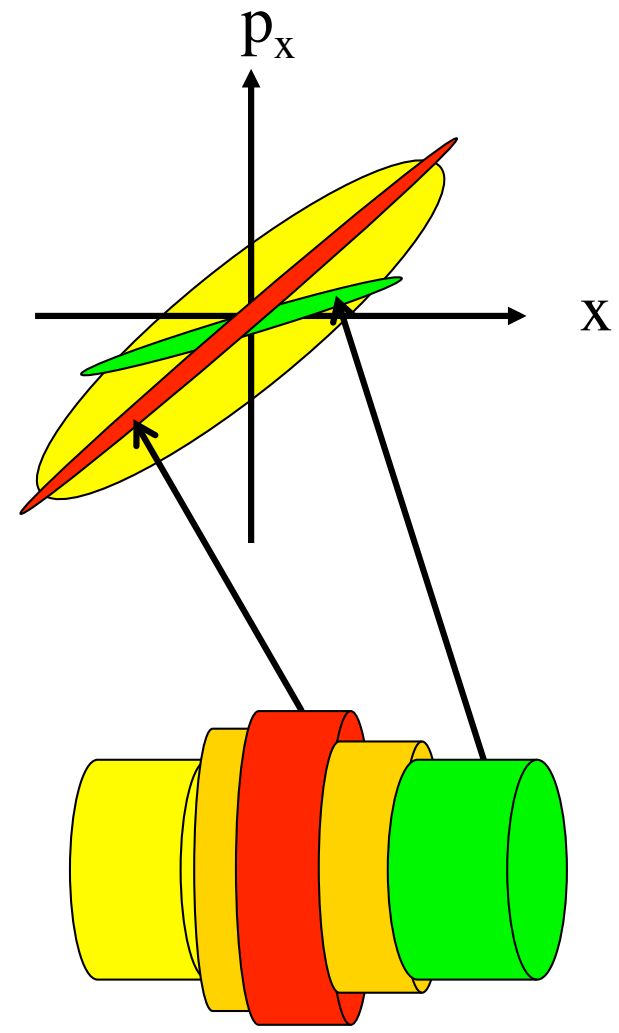

Slice Phase Spaces

Perturbed trajectories oscillate around the equilibrium with the same frequency but with different amplitudes

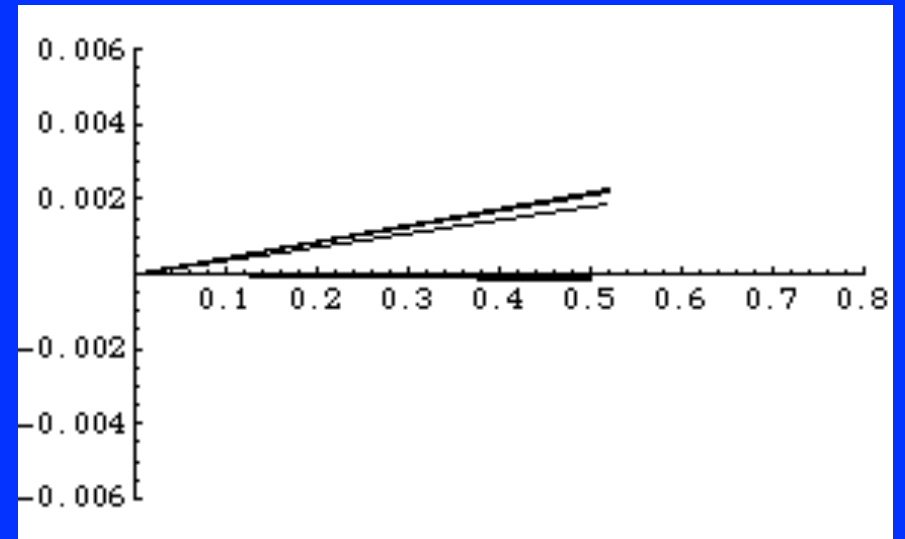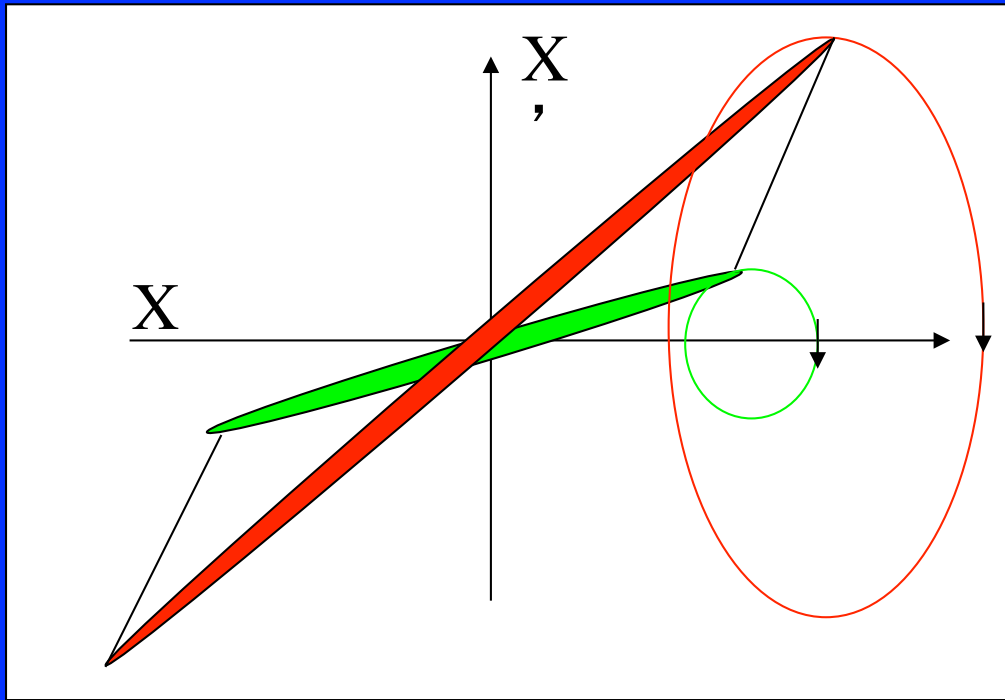




# OUTLINE

- The rms emittance concept
- rms envelope equation
- Space charge forces
- Space charge induced emittance oscillations
- Matching conditions and emittance compensation

# High Brightness Photo-Injector

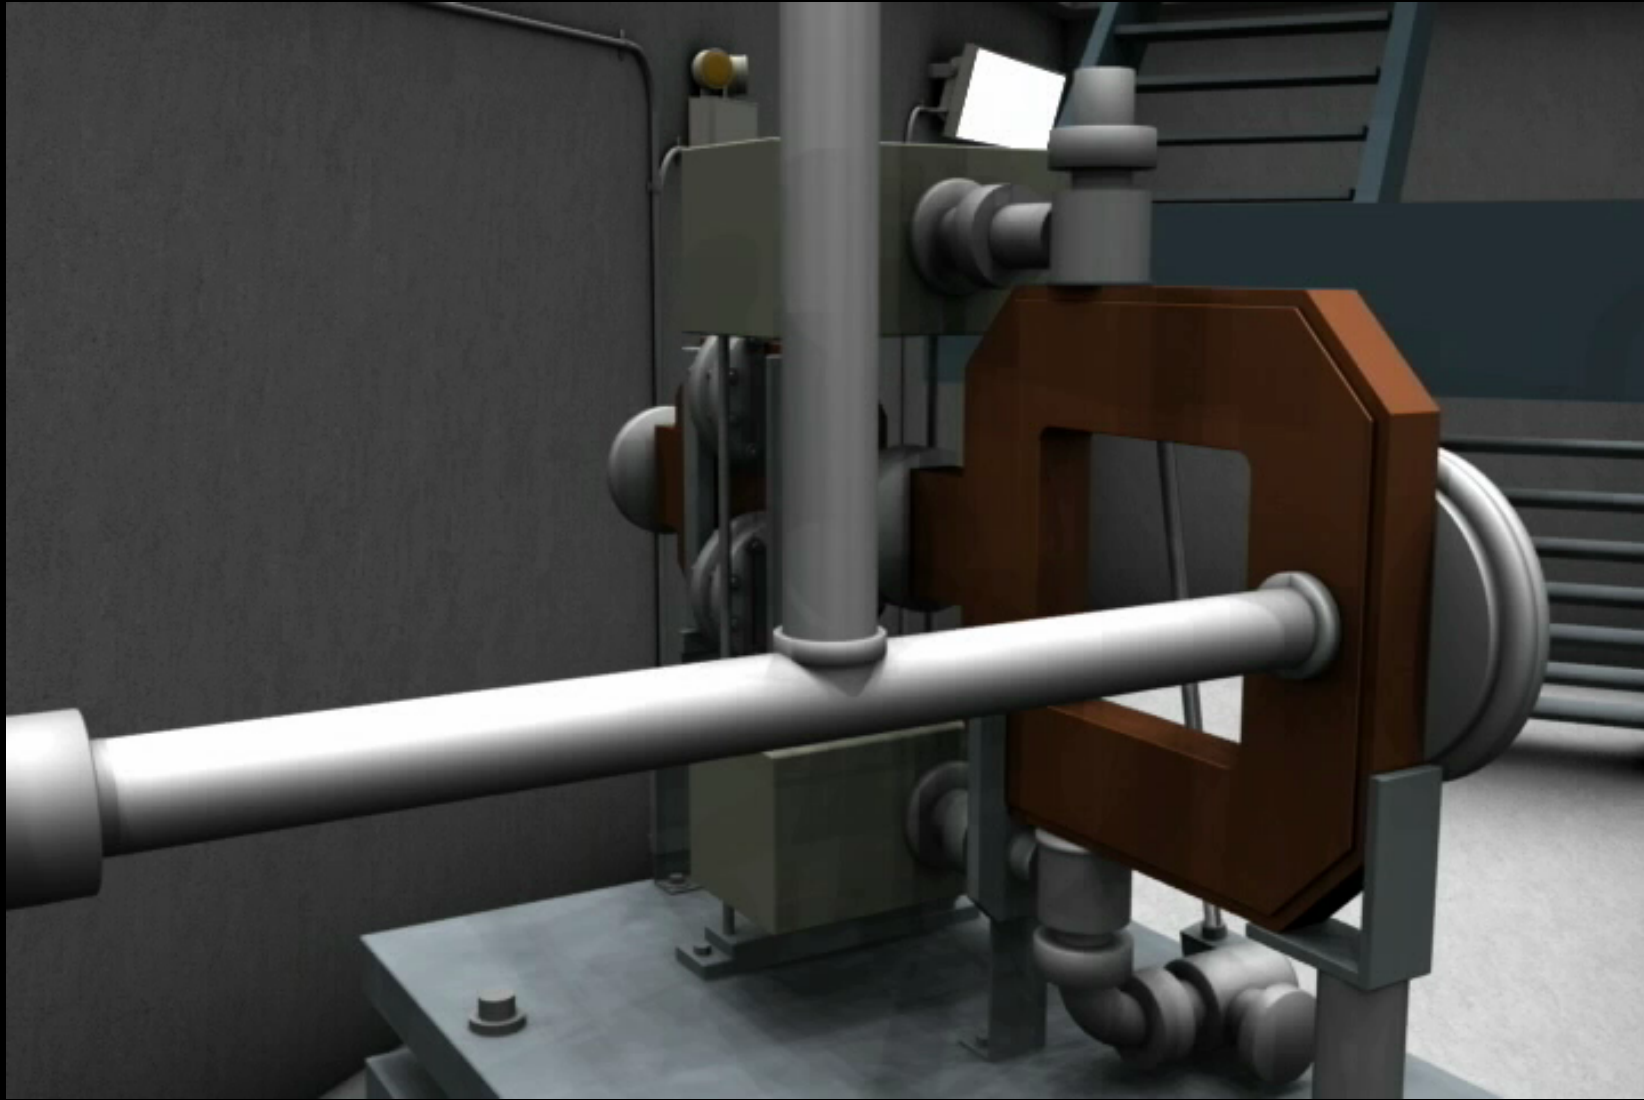

# Envelope Equation with Longitudinal Acceleration

$$\frac{dp_x}{dt} = \frac{d}{dt}(px') = \beta c \frac{d}{dz}(px') = 0$$

$$p = \beta\gamma m_0 c$$

$$x'' + \frac{p'}{p} x' = 0$$

$$x'' = -\frac{(\beta\gamma)'}{\beta\gamma} x'$$

$$\sigma_x'' = \frac{\epsilon_{rms}^2}{\sigma_x^3} + \frac{\langle xx'' \rangle}{\sigma_x}$$

$$\langle xx'' \rangle = -\frac{(\beta\gamma)'}{\beta\gamma} \langle xx' \rangle = -\frac{(\beta\gamma)'}{\beta\gamma} \sigma_{xx'} = -\frac{(\beta\gamma)'}{\beta\gamma} \sigma_x \sigma_x'$$

Space Charge De-focusing Force

$$\sigma_x'' + \frac{(\beta\gamma)'}{\beta\gamma} \sigma_x' + k^2 \sigma_x = \frac{\epsilon_n^2}{(\beta\gamma)^2 \sigma_x^3} + \frac{k_{sc}}{\sigma_x}$$


Adiabatic Damping

Emittance Pressure

Other External Focusing Forces

$$\epsilon_n = \beta\gamma \epsilon_{rms}$$

## Beam subject to strong acceleration

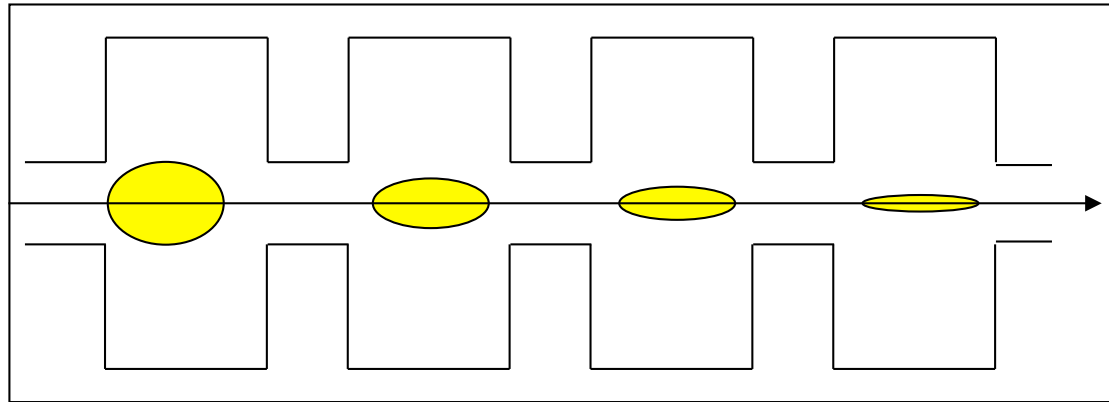

$$\sigma_x'' + \frac{\gamma'}{\gamma} \sigma_x' + \frac{k_{RF}^2}{\gamma^2} \sigma_x = \frac{\epsilon_n^2}{\gamma^2 \sigma_x^3} + \frac{k_{sc}^o}{\gamma^3 \sigma_x}$$

We must include also the RF focusing force:  $k_{RF}^2 = \frac{\gamma'^2}{2}$

$$k_{sc}^o = \frac{2I}{I_A} g(s, \gamma)$$

$$\sigma_x'' + \frac{\gamma'}{\gamma} \sigma_x' + \frac{k_{RF}^2}{\gamma^2} \sigma_x = \frac{\epsilon_n^2}{\gamma^2 \sigma_x^3} + \frac{k_{sc}^o}{\gamma^3 \sigma_x}$$

$$\gamma = 1 + \alpha z$$

$\Rightarrow$

$$\gamma'' = 0$$

Looking for an "equilibrium" solution

$$\sigma_{inv} = \sigma_o \gamma^n$$

$\Rightarrow$  all terms must have the same dependence on  $\gamma$

$$\sigma_{inv}' = n \sigma_o \gamma^{n-1} \gamma'$$

$$\sigma_{inv}'' = n(n-1) \sigma_o \gamma^{n-2} \gamma'^2$$

$$n(n-1) \sigma_o \gamma^{n-2} \gamma'^2 + n \sigma_o \gamma^{n-2} \gamma'^2 + k_{RF}^2 \sigma_o \gamma^{n-2} = \frac{k_{sc}^o}{\sigma_x} \gamma^{-3-n}$$

$$n-2 = -3-n \Rightarrow n = -\frac{1}{2}$$

$$\sigma_x'' + \frac{\gamma'}{\gamma} \sigma_x' + \frac{k_{RF}^2}{\gamma^2} \sigma_x = \frac{\varepsilon_n^2}{\gamma^2 \sigma_x^3} + \frac{k_{sc}^o}{\gamma^3 \sigma_x}$$

$$\gamma = 1 + \alpha z$$

$\implies$

$$\gamma'' = 0$$

Looking for an "equilibrium" solution  $\sigma_{inv} = \sigma_o \gamma^n$   
 $\implies$  all terms must have the same dependence on  $\gamma$

Laminar beam

$$\rho \gg 1 \implies n = -\frac{1}{2}$$

$$\sigma_q = \frac{\sigma_o}{\sqrt{\gamma}}$$


Thermal beam

$$\rho \ll 1 \implies n = 0$$

$$\sigma_\varepsilon = \sigma_o$$


## Space charge dominated beam (Laminar)

$$\sigma_q = \frac{1}{\gamma'} \sqrt{\frac{2I}{I_A \gamma}}$$

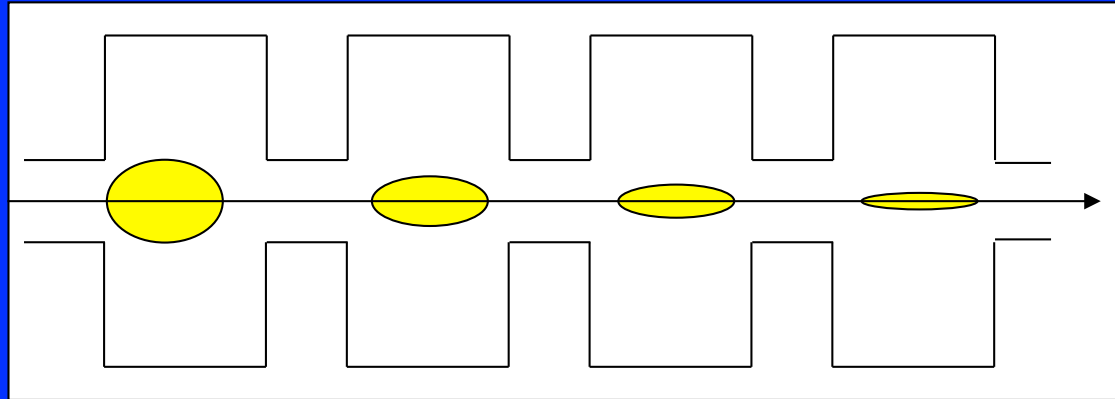


## Emittance dominated beam (Thermal)

$$\sigma_\varepsilon = \sqrt{\frac{2\varepsilon_n}{\gamma'}}$$

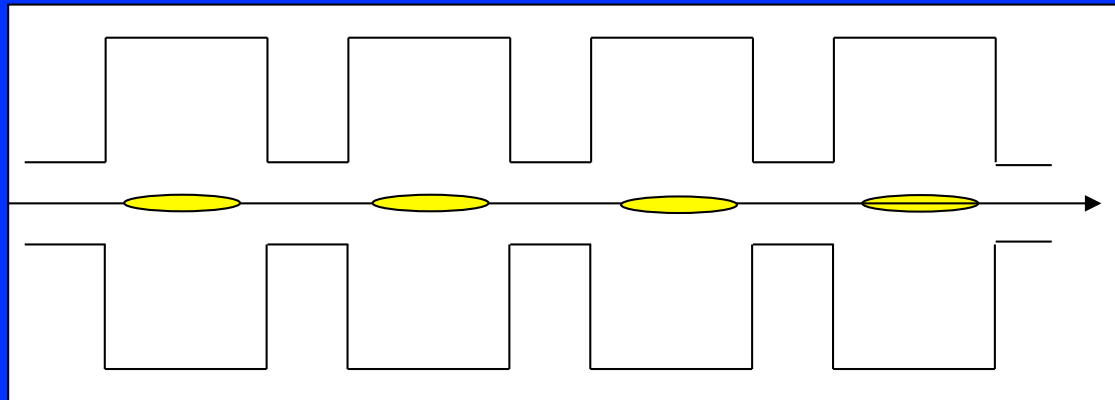

$$\sigma_q = \frac{l}{\gamma'} \sqrt{\frac{2I}{I_A \gamma}}$$

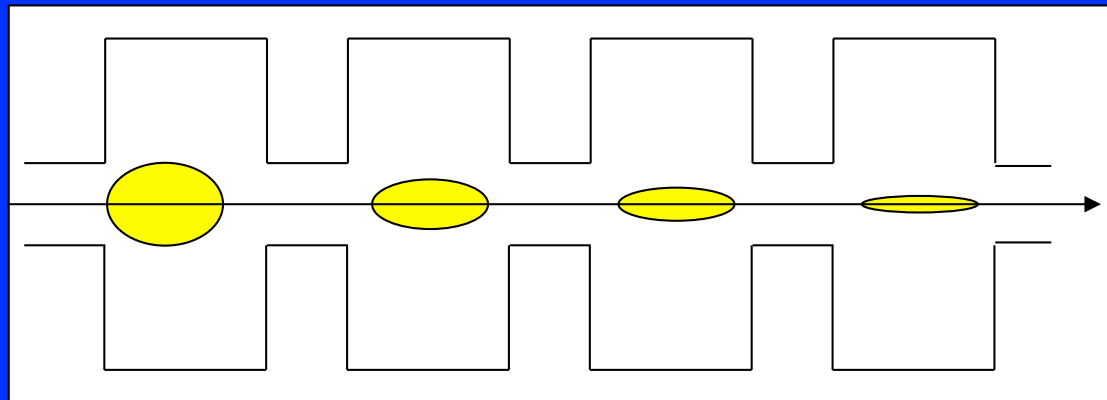

This solution represents a **beam equilibrium mode** that turns out to be the transport mode for achieving minimum emittance at the end of the **emittance correction process**




## An important property of the laminar beam

$$\sigma_q = \frac{l}{\gamma'} \sqrt{\frac{2I}{I_A \gamma}}$$

$$\sigma'_q = -\sqrt{\frac{2I}{I_A \gamma^3}}$$

Constant phase space angle:  $\delta = \frac{\gamma \sigma'_q}{\sigma_q} = -\frac{\gamma'}{2}$

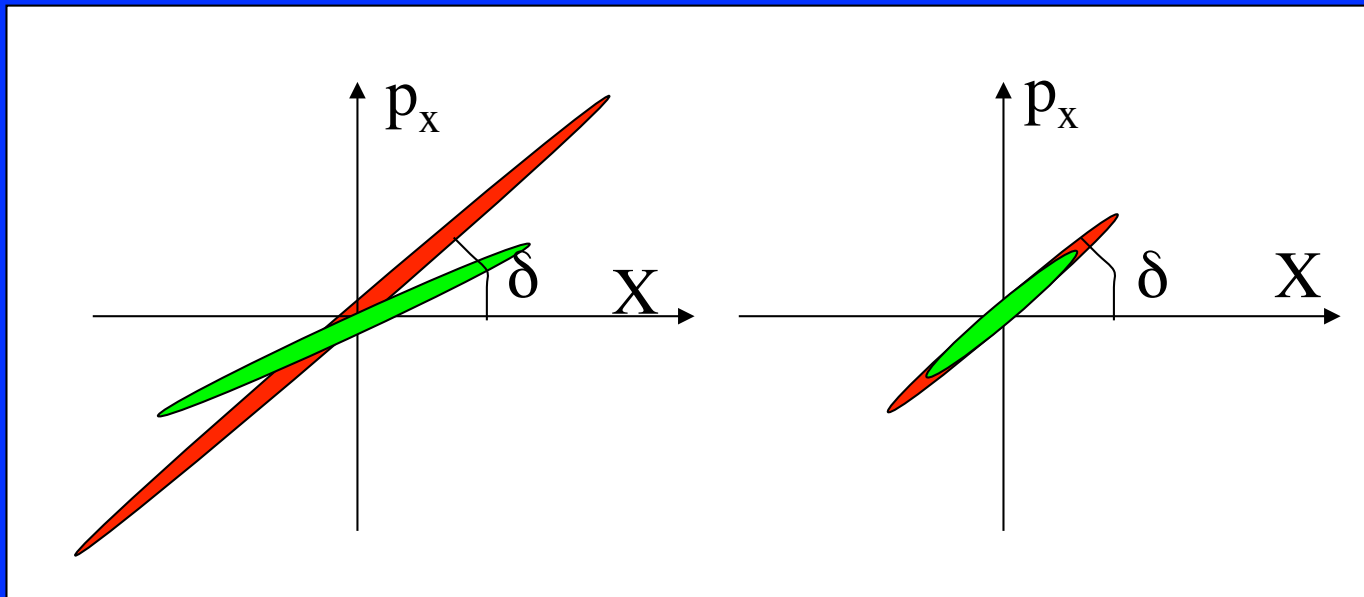


## Laminarity parameter


$$\rho = \frac{2I\sigma^2}{\gamma I_A \varepsilon_n^2} \equiv \frac{2I\sigma_q^2}{\gamma I_A \varepsilon_n^2} = \frac{4I^2}{\gamma'^2 I_A^2 \varepsilon_n^2 \gamma^2}$$






## Transition Energy ( $\rho=1$ )

$$\gamma_{tr} = \frac{2I}{\gamma' I_A \varepsilon_n}$$


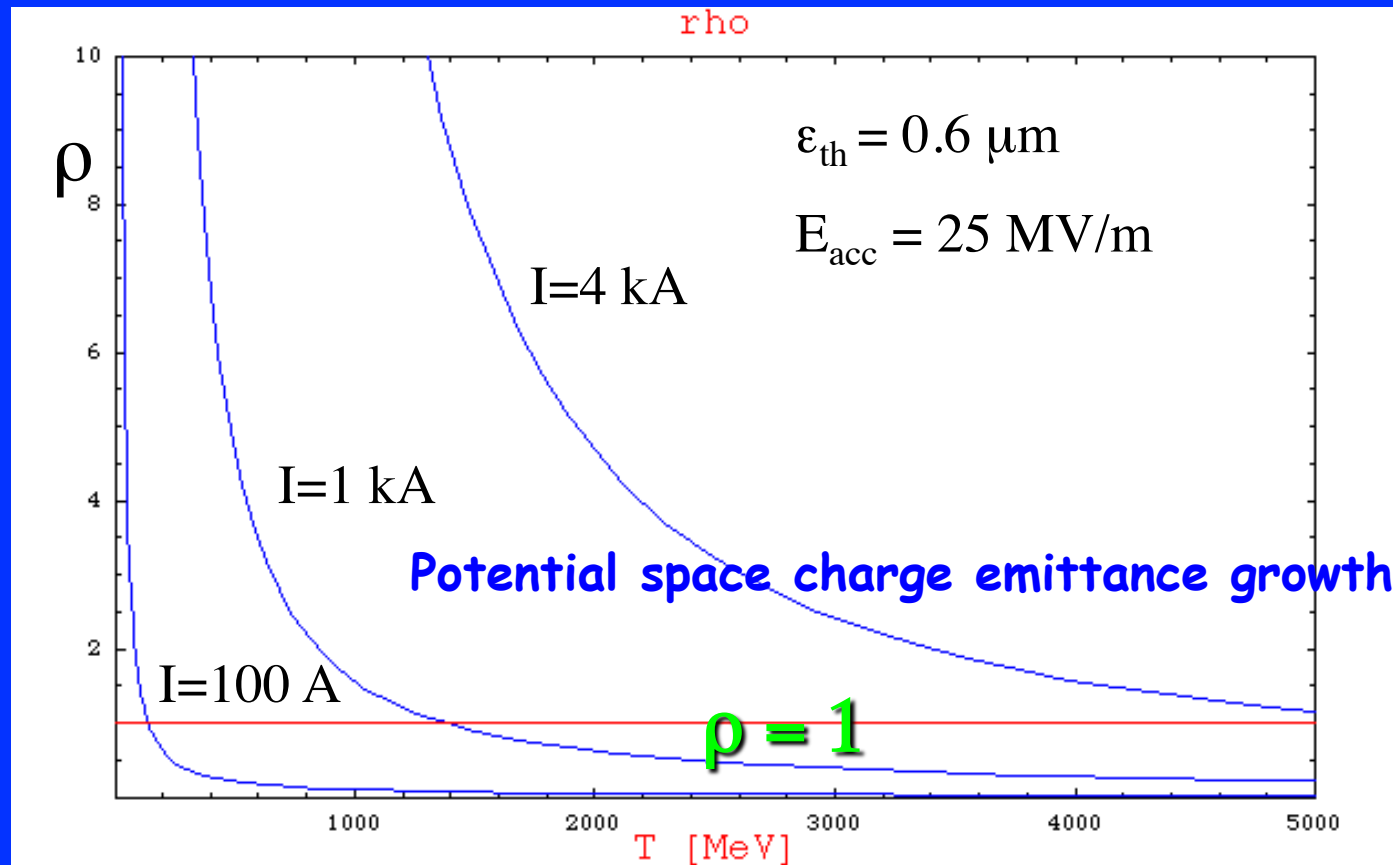











# Matching Conditions with a TW Linac

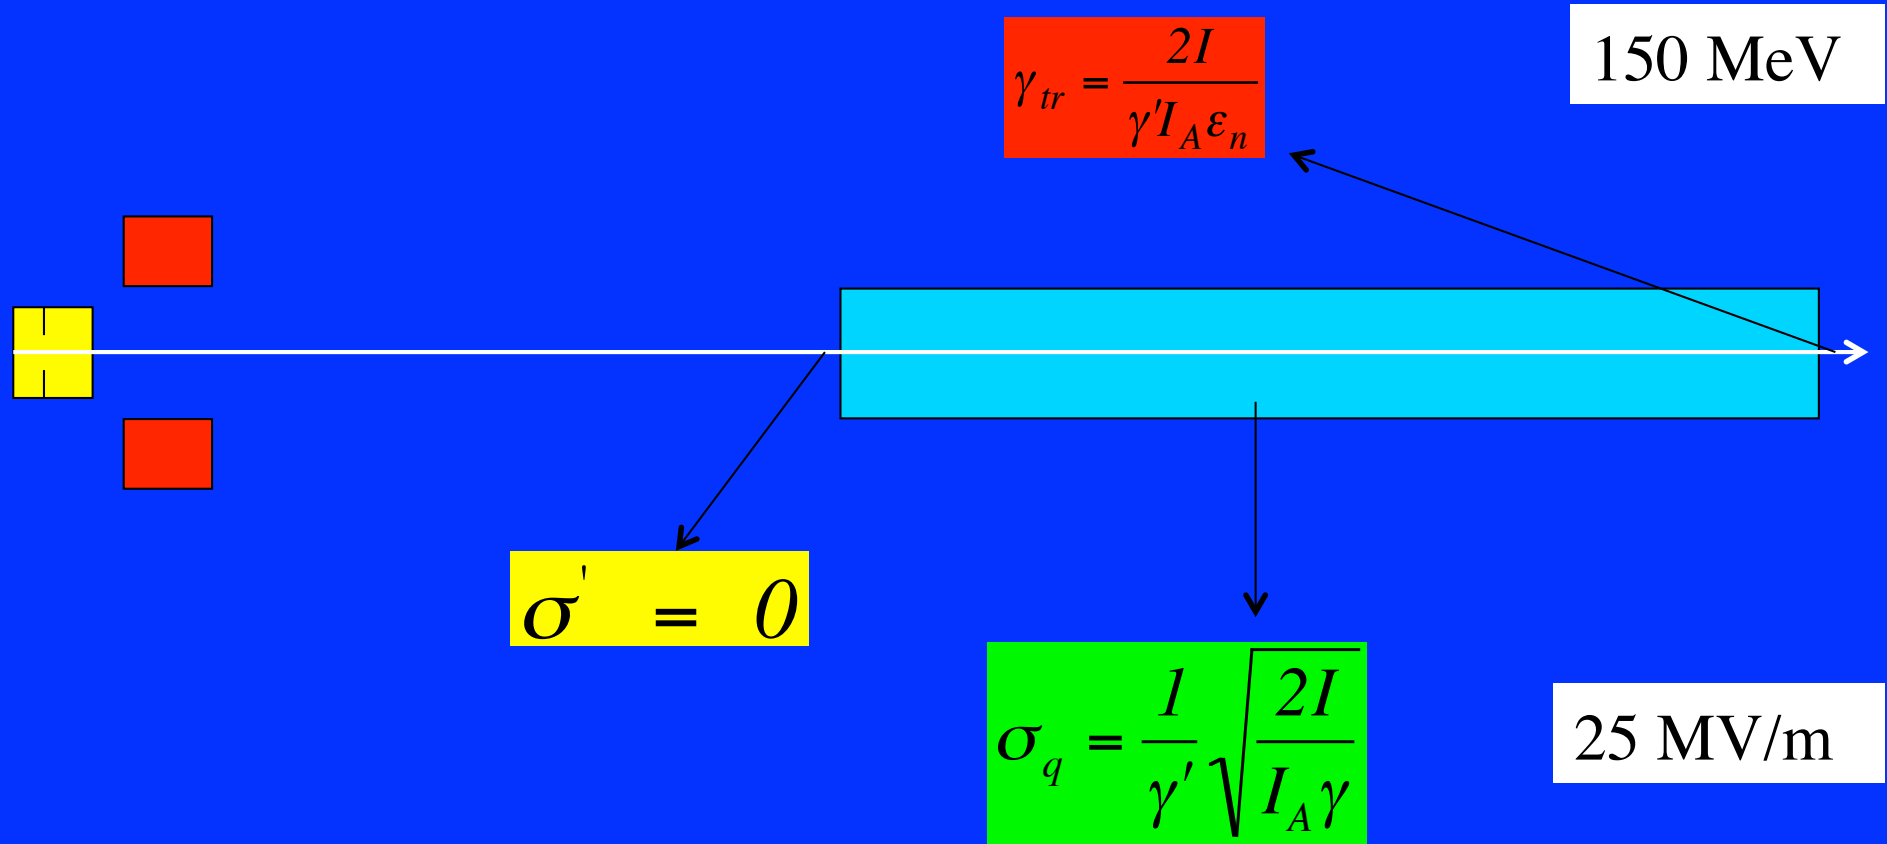

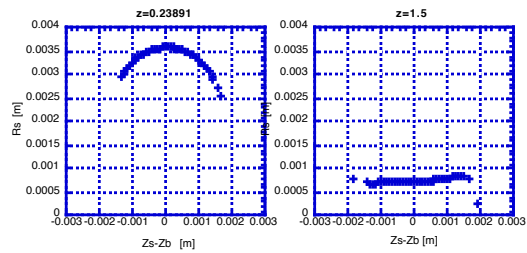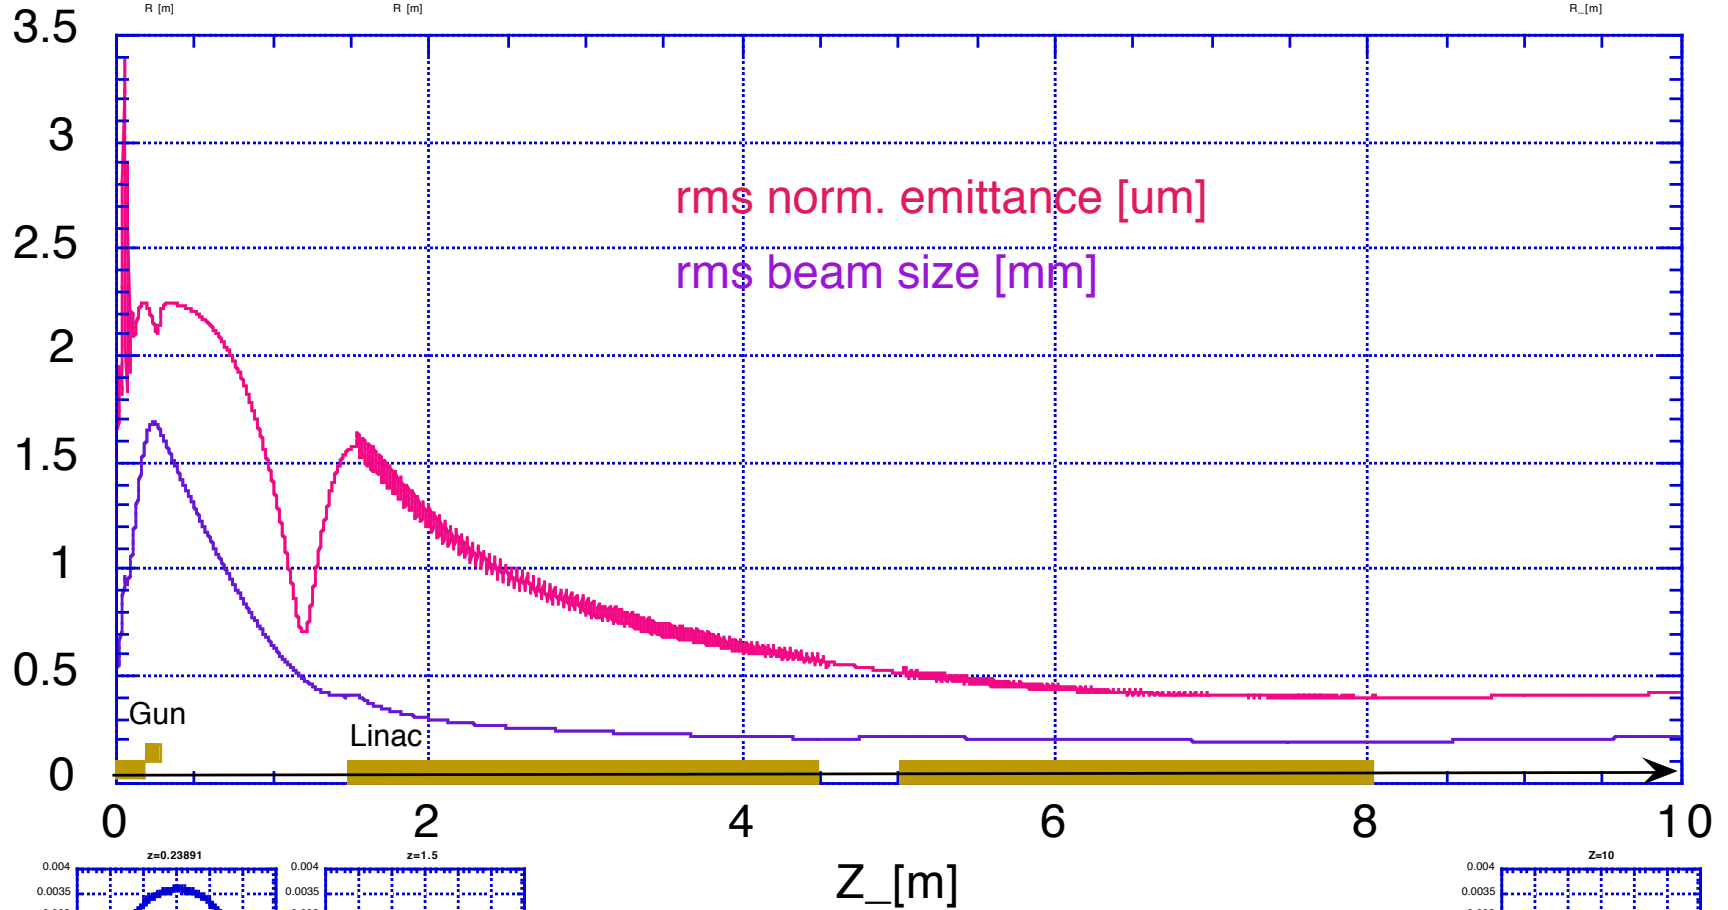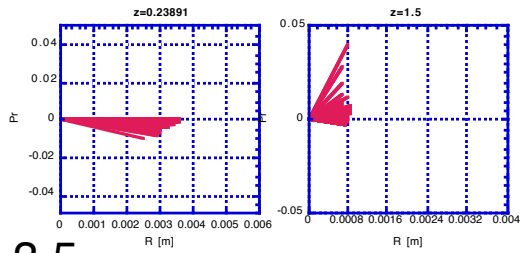

# Energy spread induces decoherence

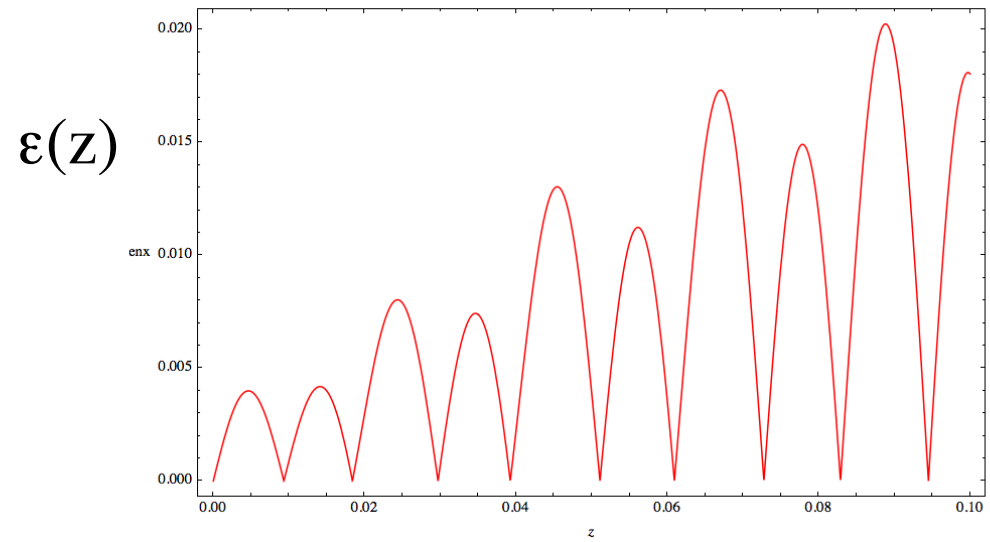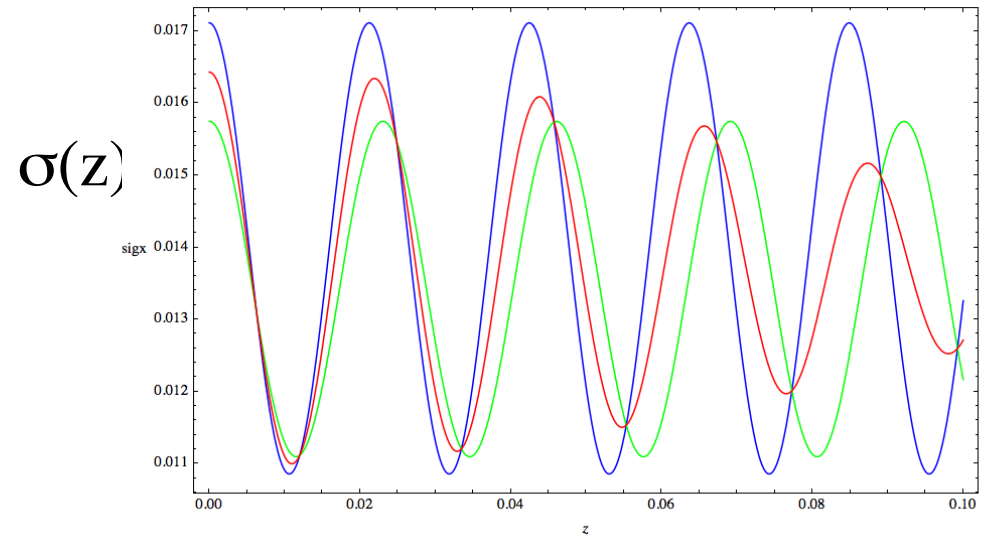

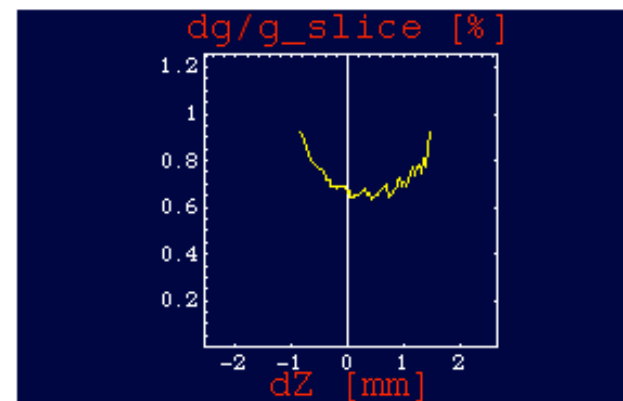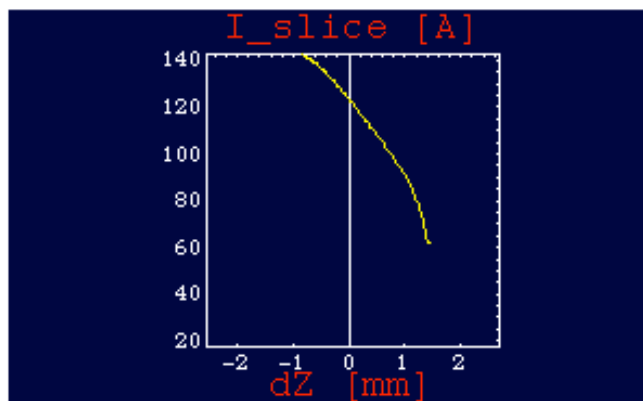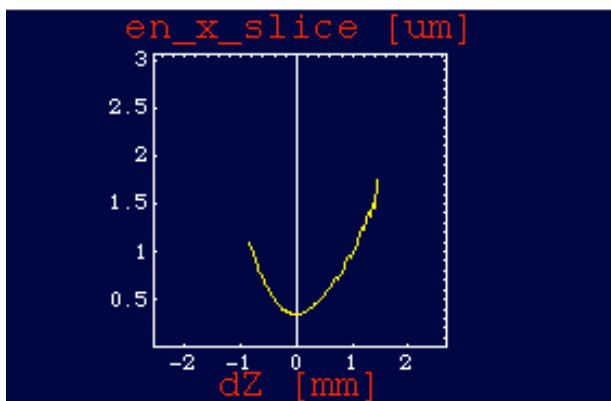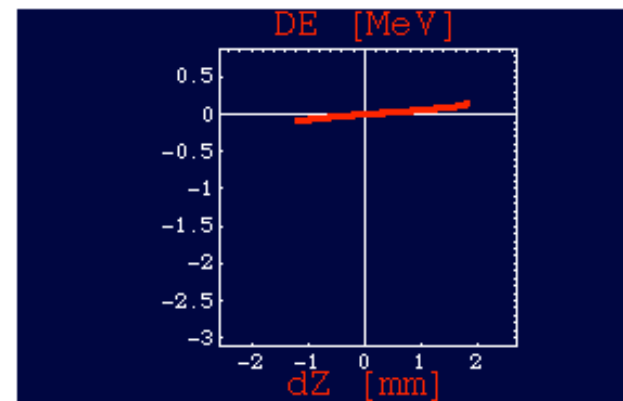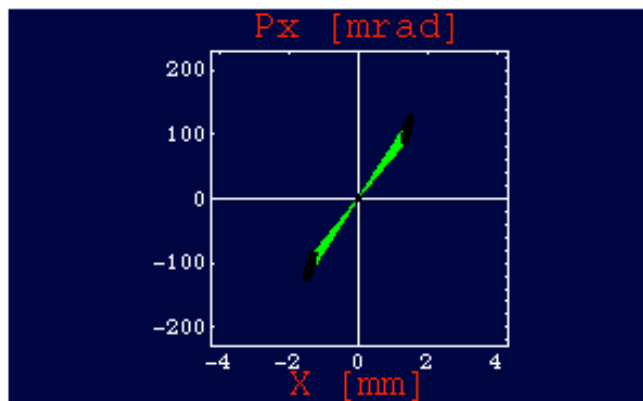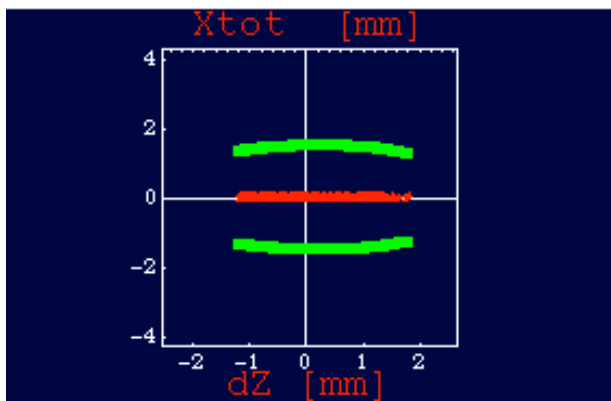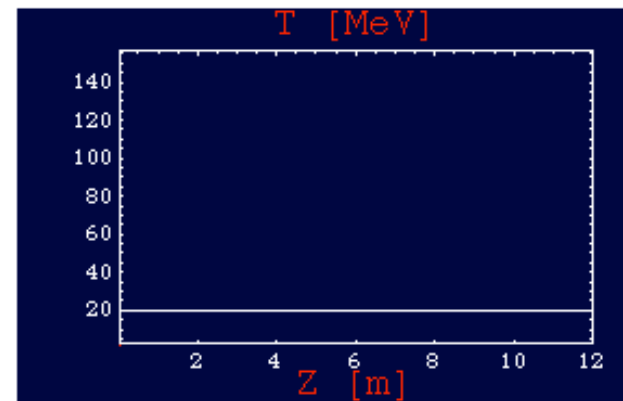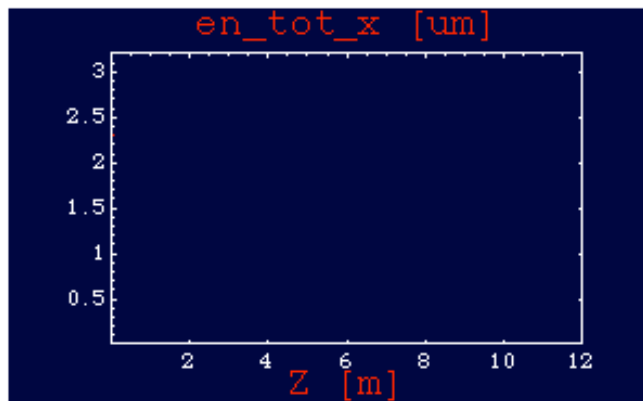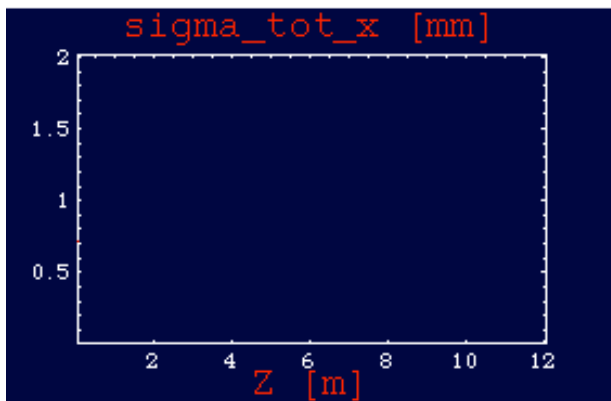

## Emittance Compensation for a SC dominated beam: Controlled Damping of Plasma Oscillations

- $\varepsilon_n$  oscillations are driven by Space Charge
- propagation close to the laminar solution allows control of  $\varepsilon_n$  oscillation “phase”
- $\varepsilon_n$  sensitive to SC up to the transition energy

# References:

- [1] T. Shintake, Proc. of the 22nd Particle Accelerator Conference, June 25-29, 2007, Albuquerque, NM (IEEE, New York, 2007), p. 89.
- [2] L. Serafini, J. B. Rosenzweig, PR E55 (1997) 7565
- [3] M. Reiser, “Theory and Design of Charged Particle Beams” , Wiley, New York, 1994
- [4] J. B. Rosenzweig, “Fundamentals of beam physics”, Oxford University Press, New York, 2003
- [5] T. Wangler, “Principles of RF linear accelerators”, Wiley, New York, 1998
- [6] S. Humphries, “Charged particle beams”, Wiley, New York, 2002
- [7] F. J. Sacherer, F. J., IEEE Trans. Nucl. Sci. NS-18, 1105 (1971).
- [8] M. Ferrario et al., Int. Journal of Modern Physics A, Vol 22, No. 23, 4214 (2007)
- [9] J. Buon, “Beam phase space and emittance”, in CERN 94-01



**THE END**