


# LONGITUDINAL beam DYNAMICS RECAP



Frank Tecker  
CERN, BE-OP

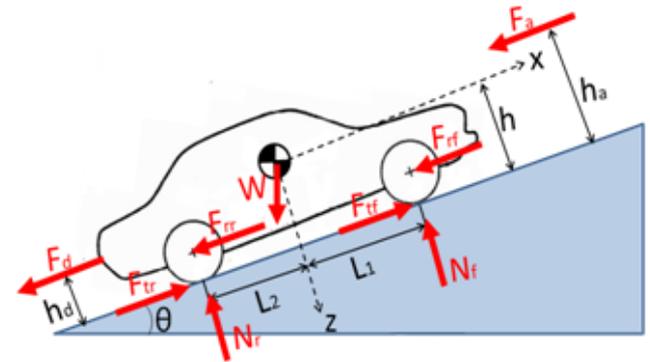

**Beam Instrumentation**  
**Tuusula, Finland, 2-15/6/2018**

# Summary of the lecture:

- Introduction
- Linac: Phase stability
- Synchrotron:
  - Synchronous Phase
  - Dispersion Effects in Synchrotron
  - Stability and Longitudinal Phase Space Motion
  - Equations of motion
- Injection Matching
- Hamiltonian of Longitudinal Motion
  
- Appendices: some derivations and details

# Particle types and acceleration

- The accelerating system will depend upon the **evolution** of the **particle velocity**:
- **electrons** reach a **constant velocity** (~speed of light) at relatively low energy
  - **heavy particles** reach a constant velocity only at very high energy
    - > we need different types of resonators, optimized for different velocities
    - > the **revolution frequency will vary**, so the **RF frequency** will be **changing**

Particle rest mass:

**electron** 0.511 MeV

**proton** 938 MeV

**<sup>239</sup>U** ~220000 MeV


Total Energy:  $E = \gamma m_0 c^2$

Relativistic  
gamma factor:

$$\gamma = \frac{E}{E_0} = \frac{m}{m_0} = \frac{1}{\sqrt{1 - \beta^2}}$$

Momentum:

$$p = mv = \frac{E}{c^2} \beta c = \beta \frac{E}{c} = \beta \gamma m_0 c$$

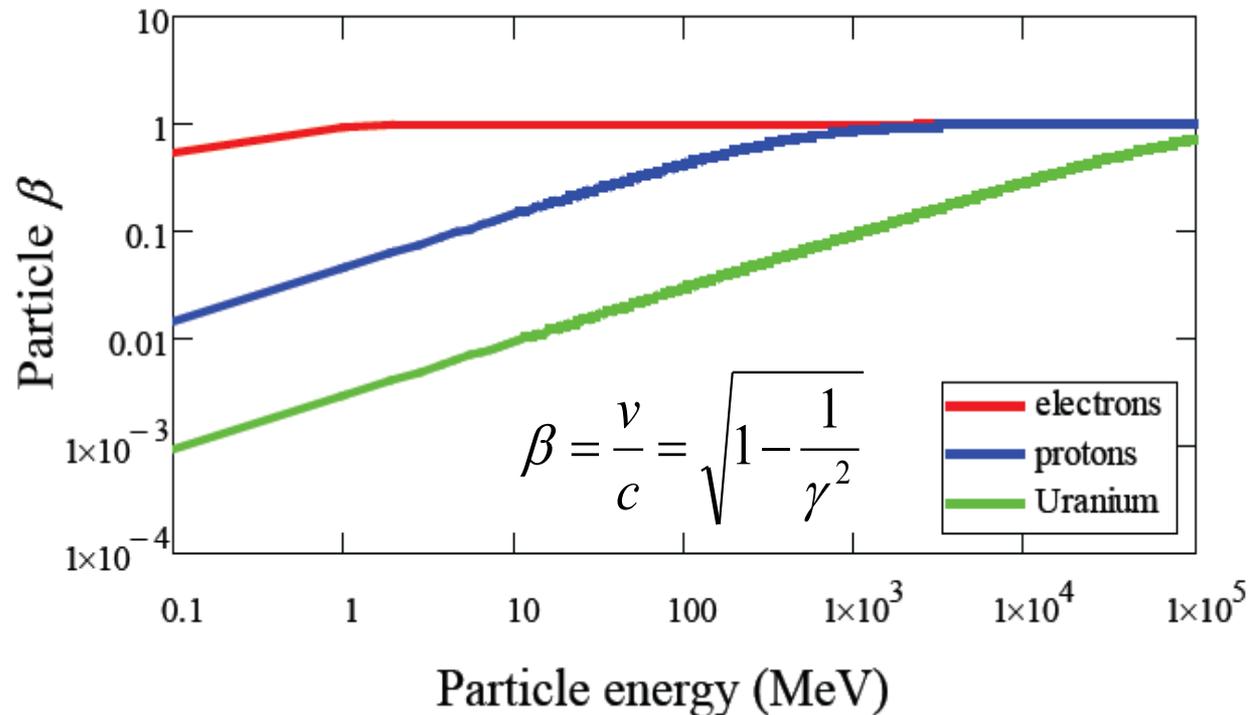

# Acceleration + Energy Gain

May the force  
be with you!



To accelerate, we need a **force in the direction of motion!**

Newton-Lorentz Force  
on a charged particle:

$$\vec{F} = \frac{d\vec{p}}{dt} = e \left( \vec{E} + \vec{v} \times \vec{B} \right)$$

2<sup>nd</sup> term always perpendicular  
to motion  $\Rightarrow$  **no acceleration**

Hence, it is necessary to have an **electric field E**  
(preferably) **along the direction of the initial momentum (z)**,  
which changes the momentum  $p$  of the particle.

$$\frac{dp}{dt} = eE_z$$

In relativistic dynamics, total **energy E** and **momentum p** are **linked by**

$$E^2 = E_0^2 + p^2 c^2 \quad \Rightarrow \quad dE = v dp \quad (2E dE = 2c^2 p dp \Leftrightarrow dE = c^2 mv / E dp = v dp)$$

The rate of **energy gain per unit length** of acceleration (along z) is then:

$$\frac{dE}{dz} = v \frac{dp}{dz} = \frac{dp}{dt} = eE_z$$

and the kinetic **energy gained** from the field along the z path is:

$$dW = dE = qE_z dz \quad \rightarrow \quad W = q \int E_z dz = qV \quad \begin{array}{l} - V \text{ is a potential} \\ - q \text{ the charge} \end{array}$$

# Summary: Relativity + Energy Gain

**Newton-Lorentz Force**  $\vec{F} = \frac{d\vec{p}}{dt} = e \left( \vec{E} + \vec{v} \times \vec{B} \right)$

2<sup>nd</sup> term always perpendicular to motion => no acceleration

## Relativistic Dynamics

$$\beta = \frac{v}{c} = \sqrt{1 - \frac{1}{\gamma^2}} \quad \gamma = \frac{E}{E_0} = \frac{m}{m_0} = \frac{1}{\sqrt{1 - \beta^2}}$$

$$p = mv = \frac{E}{c^2} \beta c = \beta \frac{E}{c} = \beta \gamma m_0 c$$

$$E^2 = E_0^2 + p^2 c^2 \quad \longrightarrow \quad dE = v dp$$

$$\frac{dE}{dz} = v \frac{dp}{dz} = \frac{dp}{dt} = e E_z$$

$$dE = dW = e E_z dz \quad \rightarrow \quad W = e \int E_z dz$$

## RF Acceleration

$$E_z = \hat{E}_z \sin \omega_{RF} t = \hat{E}_z \sin \phi(t)$$

$$\int \hat{E}_z dz = \hat{V}$$

$$W = e \hat{V} \sin \phi$$

**(neglecting transit time factor)**


The field will change during the passage of the particle through the cavity  
=> effective energy gain is lower

# Radio Frequency (RF) acceleration: Alvarez Structure

Electrostatic acceleration limited by insulation possibilities => use **RF** fields

$g$

Used for protons, ions (50 - 200 MeV,  $f \sim 200$  MHz)

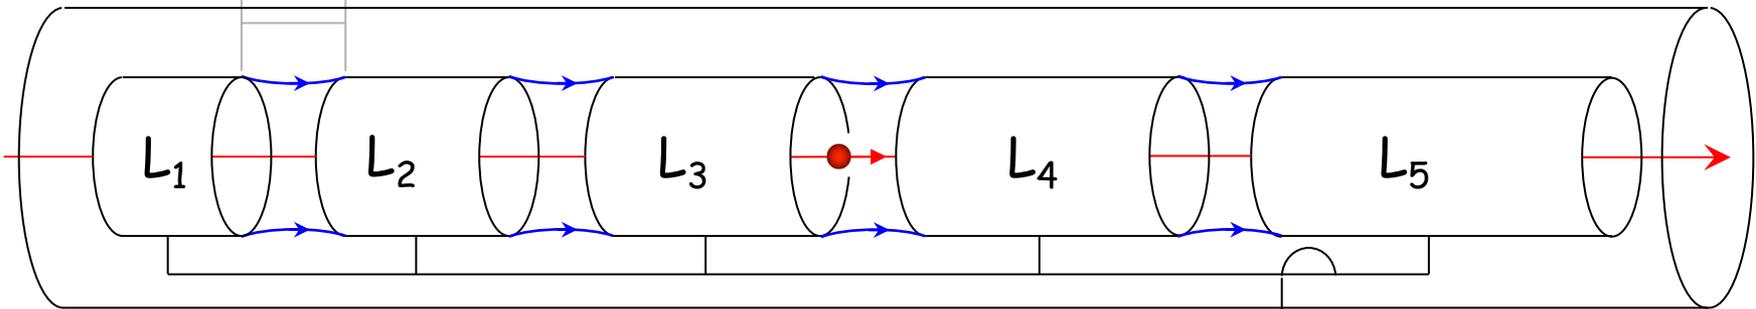

Synchronism condition ( $g \ll L$ )




$$L = v_s T_{RF} = \beta_s \lambda_{RF}$$

RF generator 

$$\omega_{RF} = 2\pi \frac{v_s}{L}$$



Note: - Drift tubes become longer for higher velocity  
- Acceleration only for bunched beam (not continuous)

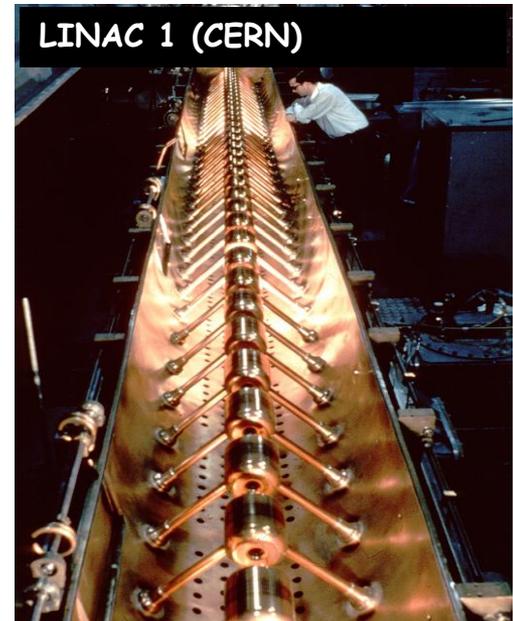

# Common Phase Conventions

1. For **circular accelerators**, the origin of time is taken at the **zero crossing** of the RF voltage with positive slope
2. For **linear accelerators**, the origin of time is taken at the positive **crest** of the RF voltage

Time  $t=0$  chosen such that:

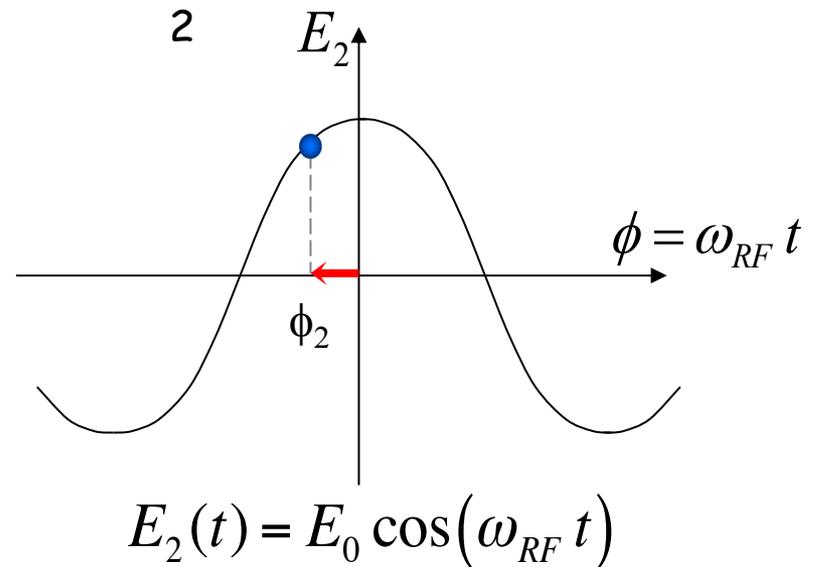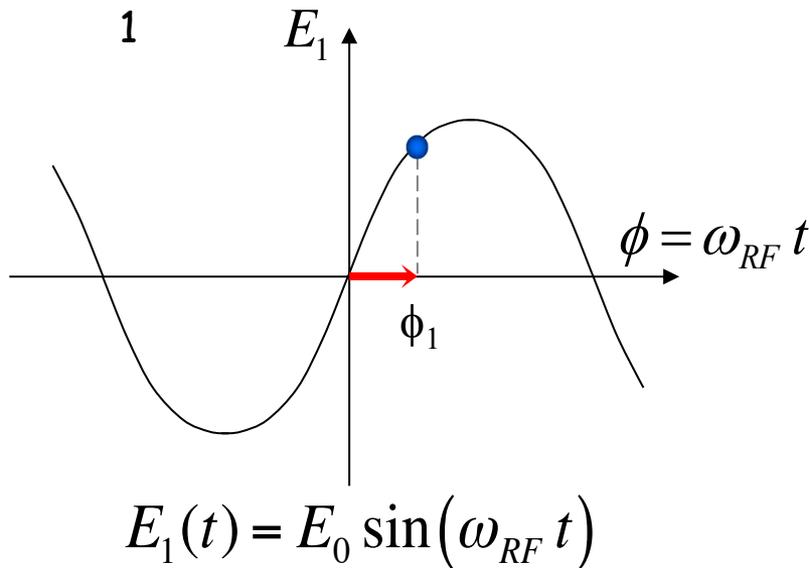


3. I will stick to **convention 1** in the following to avoid confusion

# Principle of Phase Stability (Linac)

Let's consider a succession of accelerating gaps, operating in the  $2\pi$  mode, for which the synchronism condition is fulfilled for a phase  $\Phi_s$ .

$eV_s = e\hat{V} \sin \Phi_s$  is the energy gain in one gap for the particle to reach the next gap with the same RF phase:  $P_1, P_2, \dots$  are fixed points.

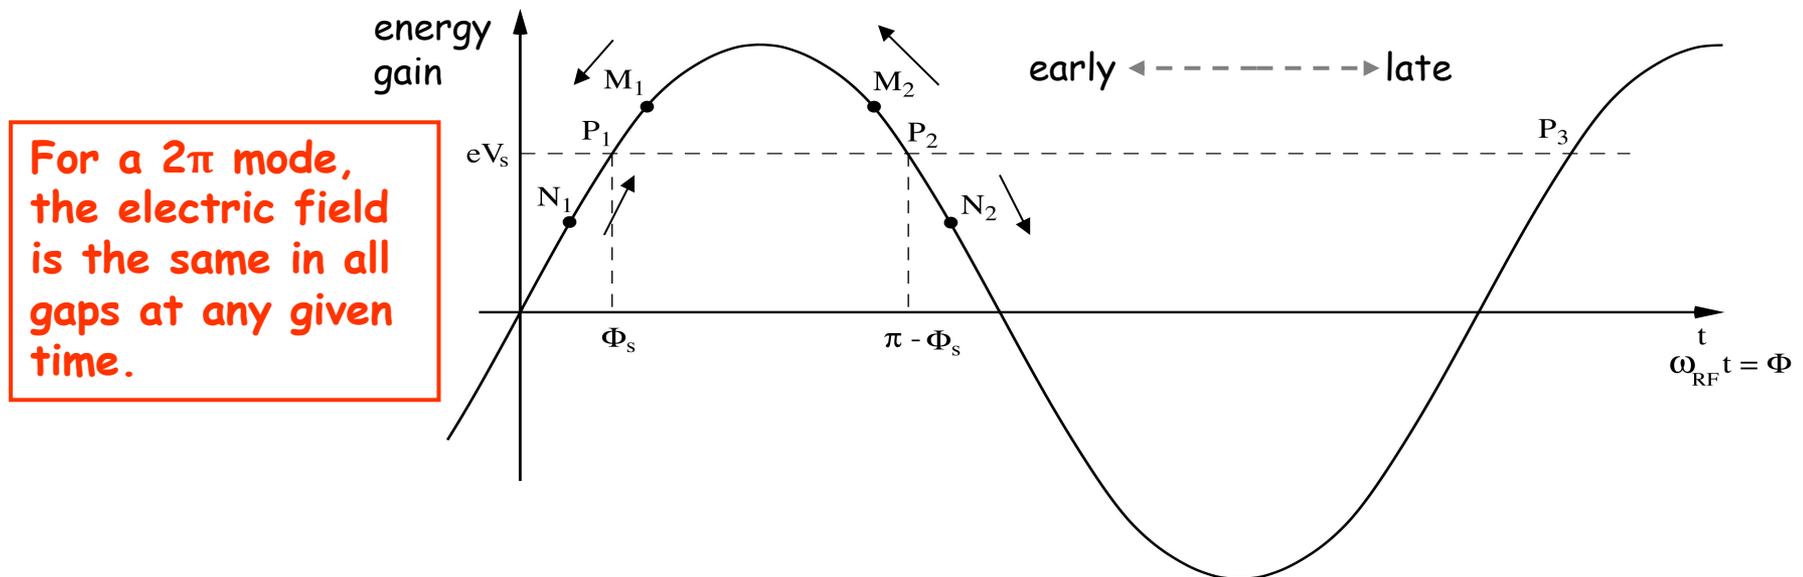


If an **energy increase** is transferred into a **velocity increase**  $\Rightarrow$   
 **$M_1$  &  $N_1$**  will move towards  $P_1$   $\Rightarrow$  **stable**  
 **$M_2$  &  $N_2$**  will go away from  $P_2$   $\Rightarrow$  **unstable**  
 (Highly relativistic particles have no significant velocity change)

# Circular accelerators

Cyclotron (not covered here)

Synchrotron

# Circular accelerators: The Synchrotron

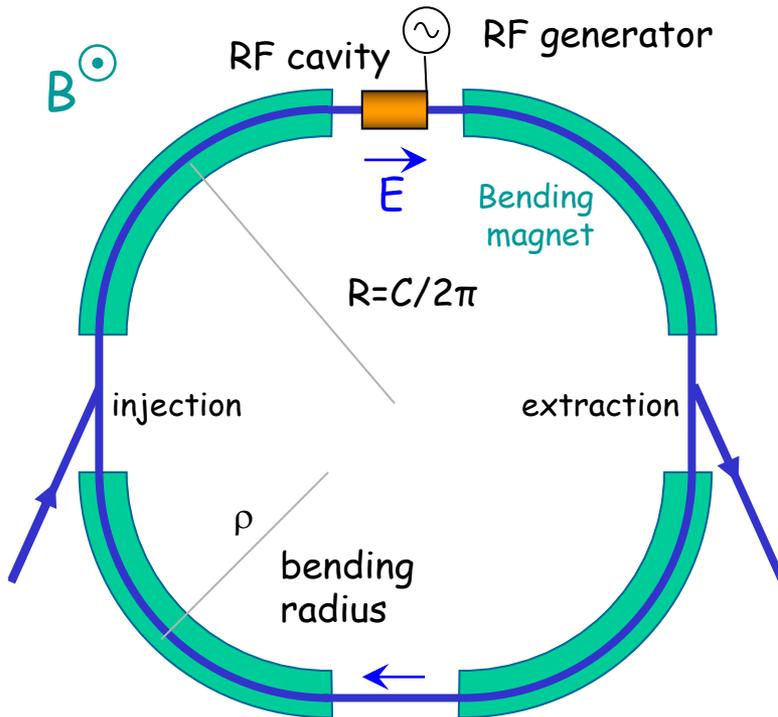

Synchronism condition



1. Constant orbit during acceleration
2. To keep particles on the closed orbit,  $B$  should increase with time
3.  $\omega$  and  $\omega_{RF}$  increase with energy

RF frequency can be multiple of revolution frequency

$$\omega_{RF} = h\omega$$


$$T_s = h T_{RF}$$

$$\frac{2\pi R}{v_s} = h T_{RF}$$


$h$  integer,  
**harmonic number:**  
 number of RF cycles  
 per revolution

# Circular accelerators: The Synchrotron

LEAR (CERN)  
Low Energy Antiproton Ring

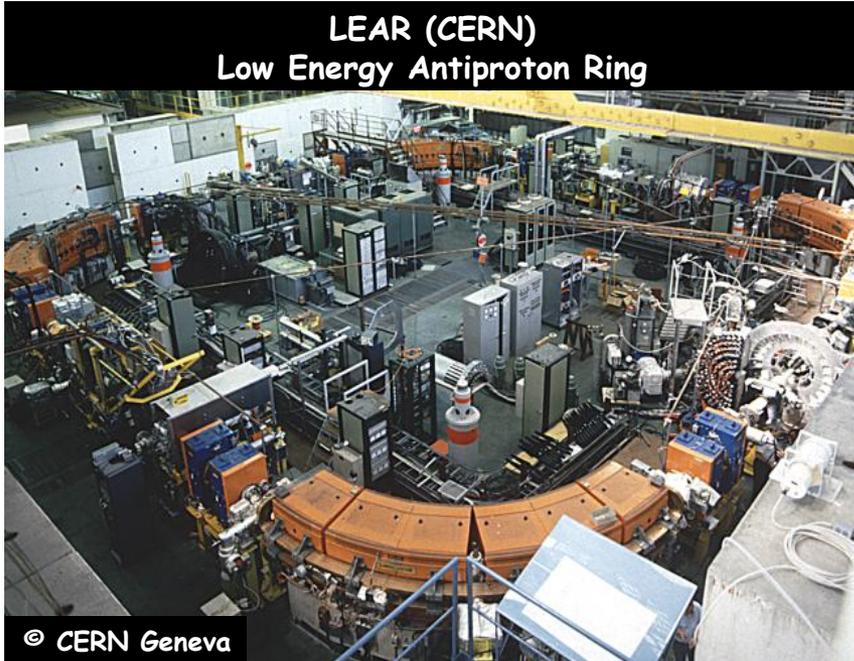


EPA (CERN)  
Electron Positron Accumulator

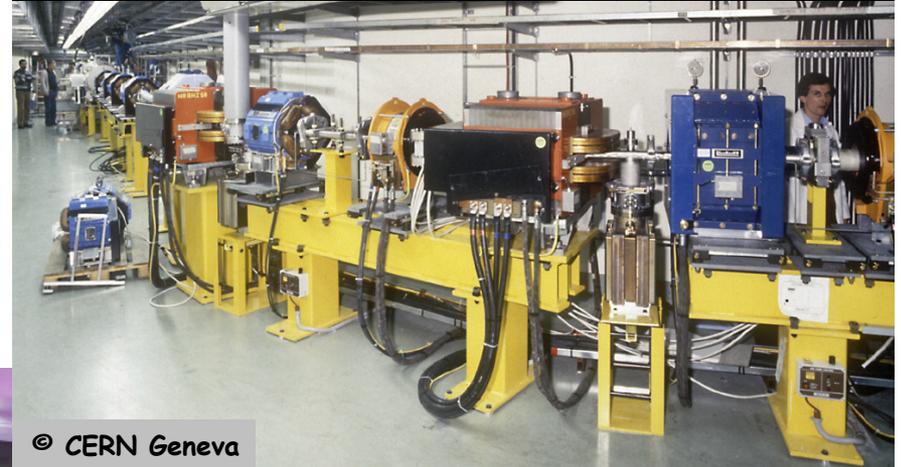


Examples of different  
proton and electron  
synchrotrons at CERN

+ LHC (of course!)

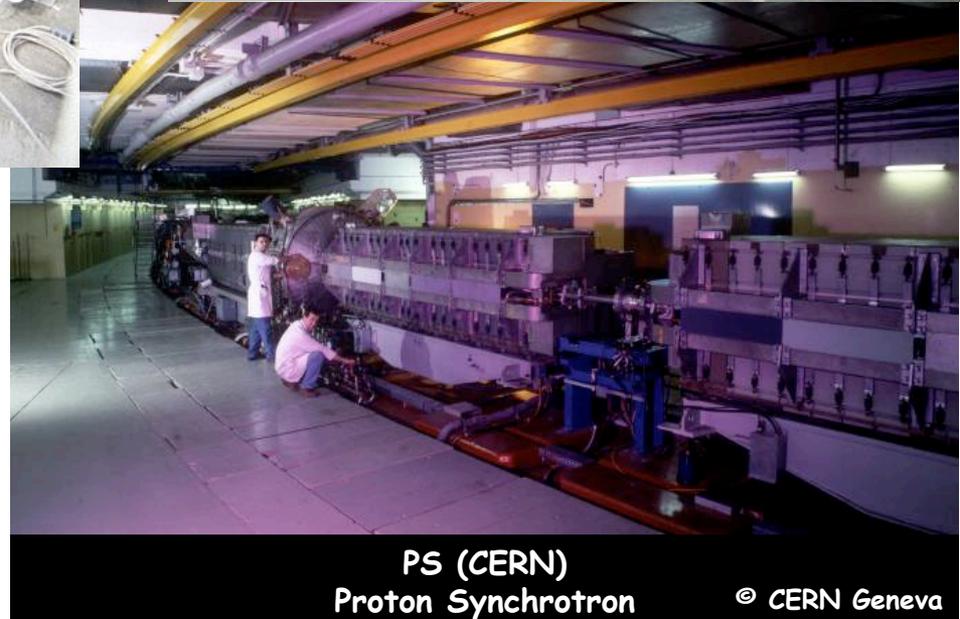

# The Synchrotron - LHC Operation Cycle

The magnetic **field** (dipole current) is **increased during the acceleration**.

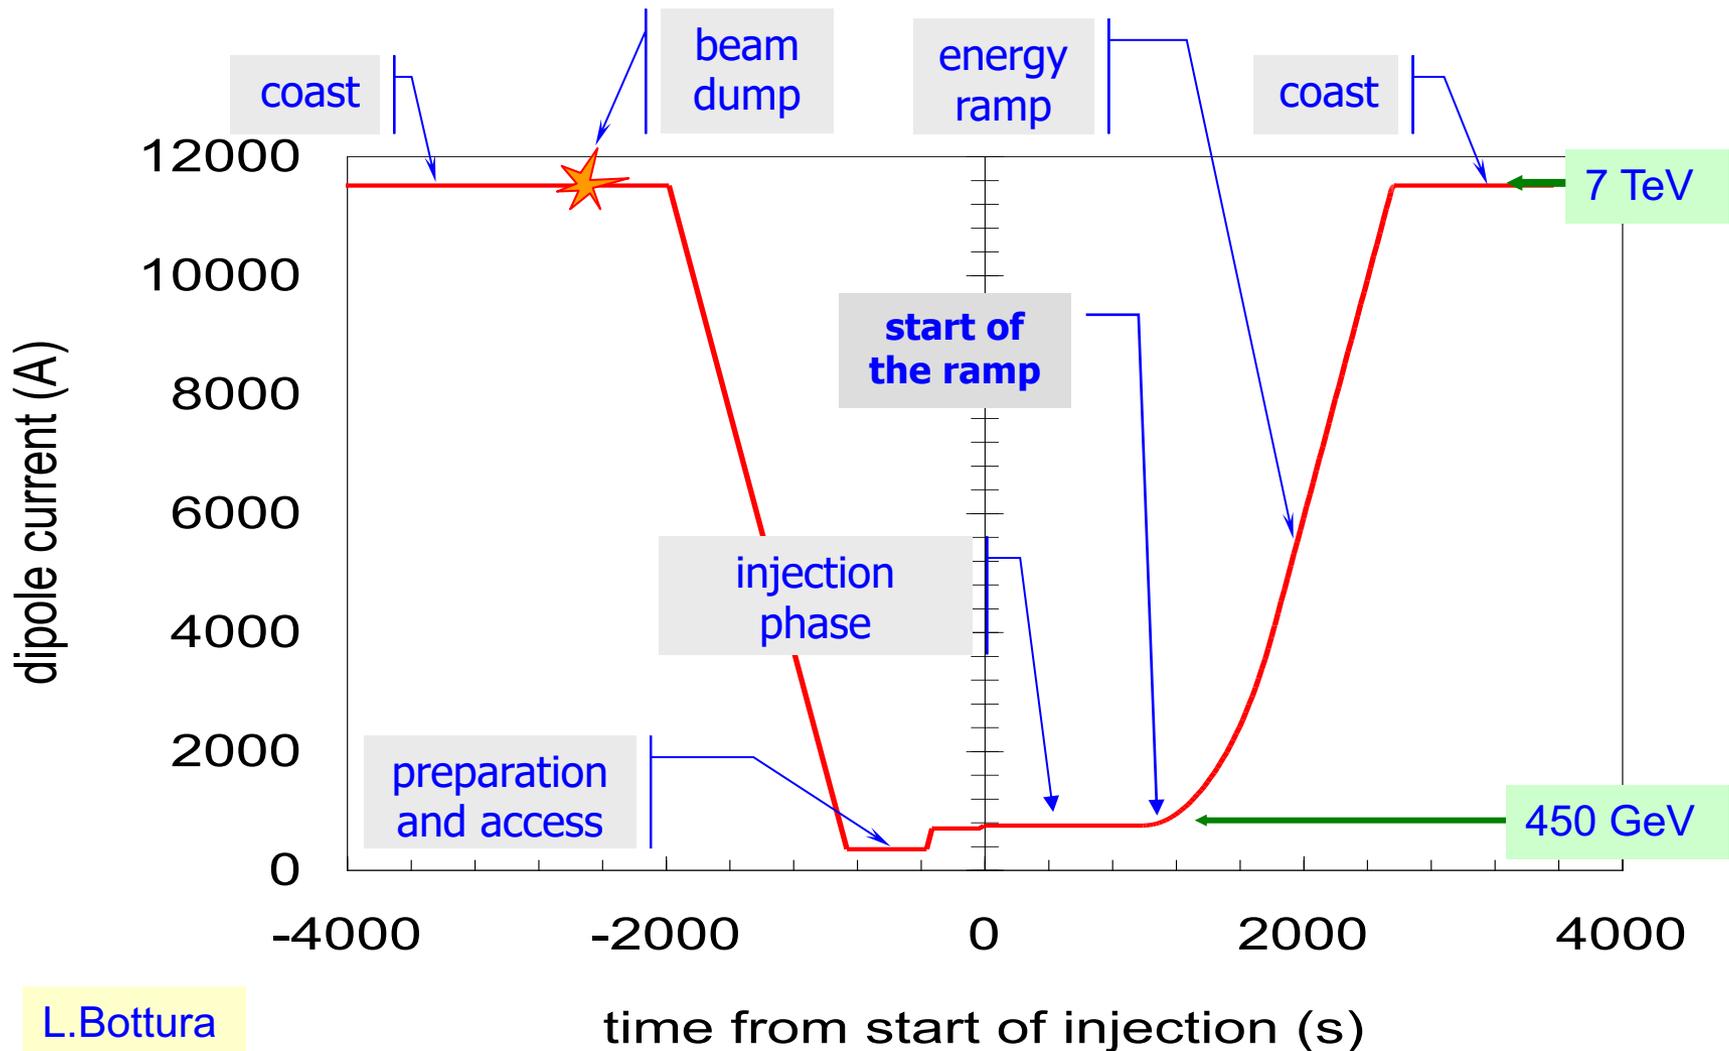

L.Bottura

# The Synchrotron - Energy ramping

Energy ramping by increasing the B field (frequency has to follow  $\nu$ ):

$$p = eB\rho \quad \Rightarrow \quad \frac{dp}{dt} = e\rho \dot{B} \quad \Rightarrow \quad (\Delta p)_{turn} = e\rho \dot{B} T_r = \frac{2\pi e\rho R \dot{B}}{\nu}$$

Since:  $E^2 = E_0^2 + p^2 c^2 \quad \Rightarrow \quad \Delta E = \nu \Delta p$

$$(\Delta E)_{turn} = (\Delta W)_s = 2\pi e\rho R \dot{B} = e\hat{V} \sin\phi_s$$

Stable phase  $\phi_s$  changes during energy ramping!

$$\sin \phi_s = 2\pi \rho R \frac{\dot{B}}{\hat{V}_{RF}} \quad \Rightarrow \quad \phi_s = \arcsin\left(2\pi \rho R \frac{\dot{B}}{\hat{V}_{RF}}\right)$$

- The number of **stable synchronous particles** is equal to the **harmonic number h**. They are equally spaced along the circumference.
- Each synchronous particle satisfies the relation  $p=eB\rho$ . They have the nominal energy and follow the nominal trajectory.

# The Synchrotron - Frequency change

During the energy ramping, **the RF frequency increases** to follow the increase of the revolution frequency :

$$\omega = \frac{\omega_{RF}}{h} = \omega(B, R_s)$$


Hence: 
$$\frac{f_{RF}(t)}{h} = \frac{v(t)}{2\pi R_s} = \frac{1}{2\pi} \frac{ec^2}{E_s(t)} \frac{\rho}{R_s} B(t) \quad (\text{using } p(t) = eB(t)\rho, \quad E = mc^2 \quad )$$

Since  $E^2 = (m_0c^2)^2 + p^2c^2$  the **RF frequency** must **follow** the variation of the **B field** with the law

$$\frac{f_{RF}(t)}{h} = \frac{c}{2\pi R_s} \left\{ \frac{B(t)^2}{(m_0c^2 / ec\rho)^2 + B(t)^2} \right\}^{1/2}$$

This asymptotically tends towards  $f_r \rightarrow \frac{c}{2\pi R_s}$  when B becomes large compared to  $m_0c^2 / (ec\rho)$  which corresponds to  $v \rightarrow c$

# Dispersion Effects in a Synchrotron

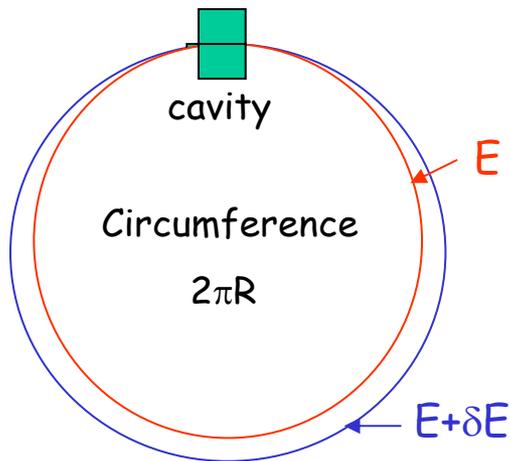

A particle slightly shifted in momentum will have a

- dispersion orbit and a **different orbit length**
- a **different velocity**.

As a result of both effects the revolution frequency changes with a "**slip factor η**":

$$\eta = \frac{d f_r / f_r}{d p / p} \Rightarrow$$

p=particle momentum

R=synchrotron physical radius

f<sub>r</sub>=revolution frequency

**Note: you also find η defined with a minus sign!**

Effect from orbit defined by **Momentum compaction factor:**

$$\alpha_c = \frac{dL/L}{dp/p}$$

Property of the beam optics:  
(derivation in Appendix)

$$\alpha_c = \frac{1}{L} \int_C \frac{D_x(s)}{\rho(s)} ds_0$$

# Dispersion Effects - Revolution Frequency

The **two effects** of the **orbit length** and the particle **velocity** change the revolution frequency as:

$$f_r = \frac{\beta c}{2\pi R} \quad \Rightarrow \quad \frac{df_r}{f_r} = \frac{d\beta}{\beta} - \frac{dR}{R} \stackrel{\substack{\uparrow \\ \text{definition of momentum} \\ \text{compaction factor}}}{=} \frac{d\beta}{\beta} - \alpha_c \frac{dp}{p}$$

$$\frac{df_r}{f_r} = \left( \frac{1}{\gamma^2} - \alpha_c \right) \frac{dp}{p}$$


$$p = mv = \beta\gamma \frac{E_0}{c} \quad \Rightarrow \quad \frac{dp}{p} = \frac{d\beta}{\beta} + \frac{d(1-\beta^2)^{-1/2}}{(1-\beta^2)^{-1/2}} = \underbrace{(1-\beta^2)^{-1}}_{\gamma^2} \frac{d\beta}{\beta}$$

**Slip factor:**  $\eta = \frac{1}{\gamma^2} - \alpha_c$     or     $\eta = \frac{1}{\gamma^2} - \frac{1}{\gamma_t^2}$     with     $\gamma_t = \frac{1}{\sqrt{\alpha_c}}$

At **transition energy**,  $\eta = 0$ , the velocity change and the path length change with momentum compensate each other. So the revolution frequency there is independent from the momentum deviation.

# Phase Stability in a Synchrotron

- From the definition of  $\eta$  it is clear that an **increase in momentum** gives
- **below transition** ( $\eta > 0$ ) a **higher revolution frequency** (increase in velocity dominates) while
  - **above transition** ( $\eta < 0$ ) a **lower revolution frequency** ( $v \approx c$  and longer path) where the momentum compaction (generally  $> 0$ ) dominates.

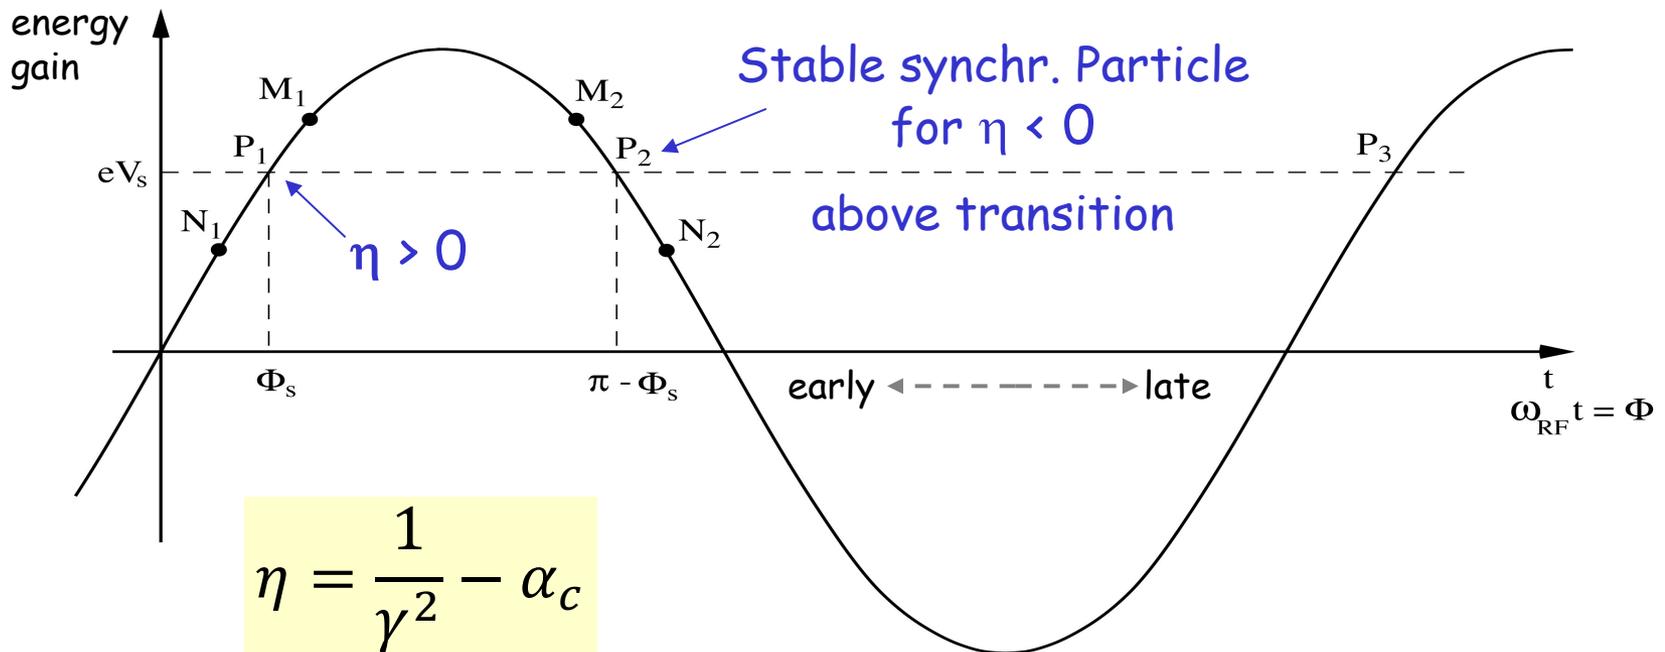


# Crossing Transition

At **transition**, the velocity change and the path length change with momentum compensate each other. So the revolution frequency there is independent from the momentum deviation.

Crossing transition during acceleration makes the previous stable synchronous phase unstable. The RF system needs to make a rapid change of the RF phase, a '**phase jump**'.

$$\alpha_c \sim \frac{1}{Q_x^2}$$

$$\gamma_t = \frac{1}{\sqrt{\alpha_c}} \sim Q_x$$

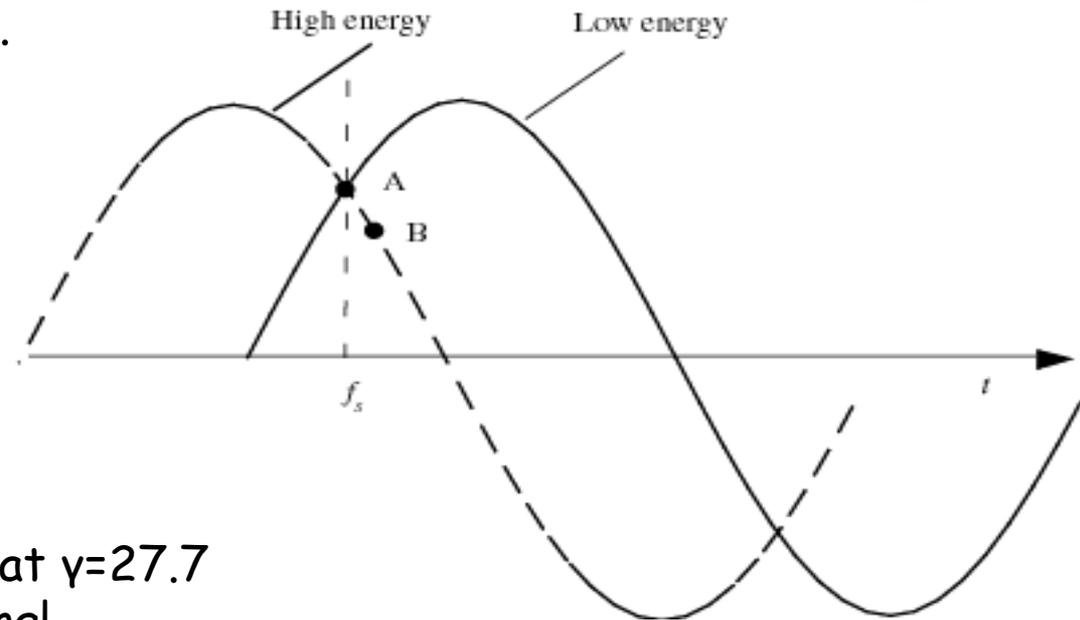

In the PS:  $\gamma_t$  is at  $\sim 6$  GeV

In the SPS:  $\gamma_t = 22.8$ , injection at  $\gamma = 27.7$

=> no transition crossing!

In the LHC:  $\gamma_t$  is at  $\sim 55$  GeV, also far below injection energy


Transition crossing not needed in leptons machines, why?

# Dynamics: Synchrotron oscillations

Simple case (no accel.):  $B = \text{const.}$ , below transition  $\gamma < \gamma_t$


The phase of the synchronous particle must therefore be  $\phi_0 = 0$ .

- $\Phi_1$
- The particle **B** is accelerated
  - Below transition, an energy increase means an increase in revolution frequency
  - The particle arrives earlier - tends toward  $\phi_0$

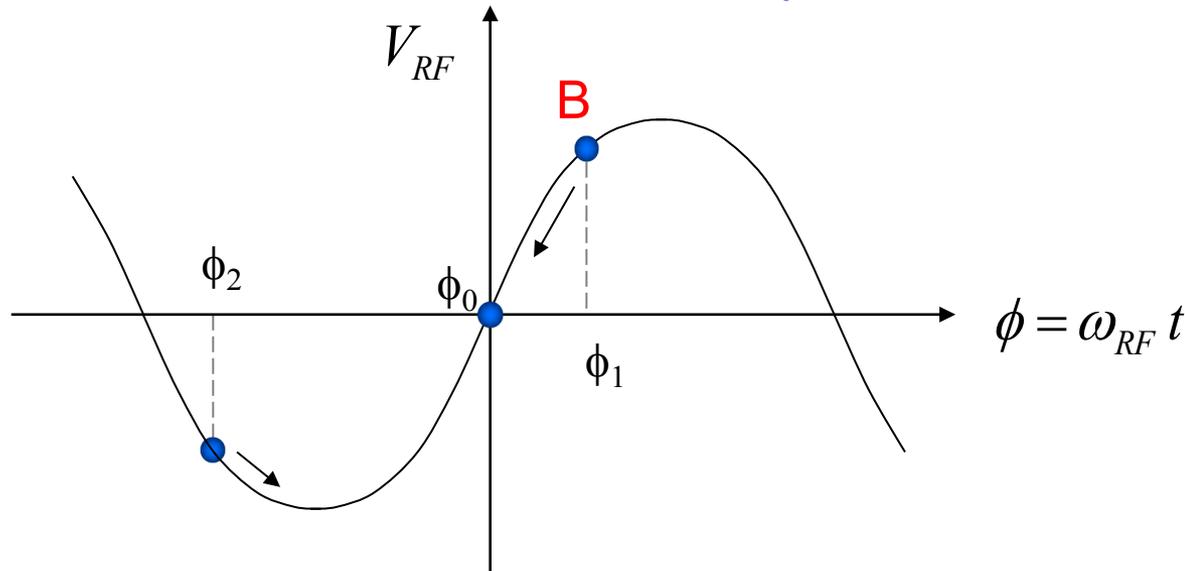

- $\phi_2$
- The particle is decelerated
  - decrease in energy - decrease in revolution frequency
  - The particle arrives later - tends toward  $\phi_0$

# Synchrotron oscillations

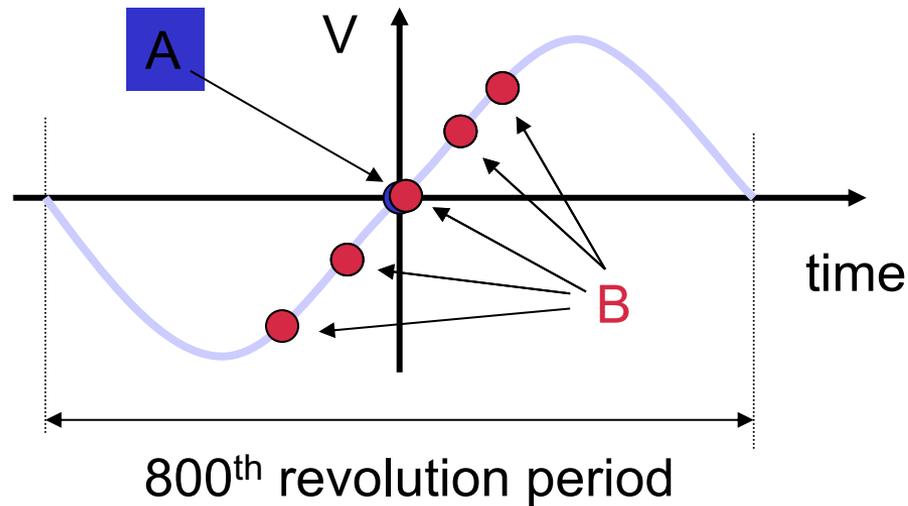


Particle **B** is performing **Synchrotron Oscillations** around synchronous particle **A**.

The amplitude depends on the initial phase and energy.

The **oscillation frequency** is much **slower than** in the **transverse** plane. It takes a large number of revolutions for one complete oscillation. Restoring electric force smaller than magnetic force.

# The Potential Well

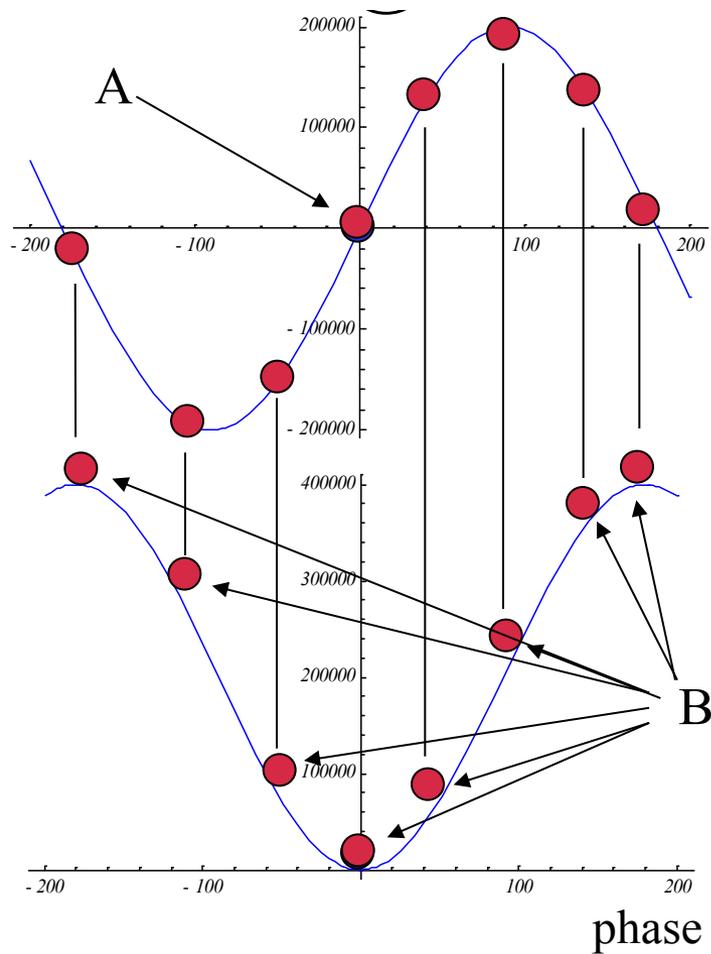


Cavity voltage


Potential well

# Longitudinal phase space

The **energy - phase oscillations** can be drawn in **phase space**:

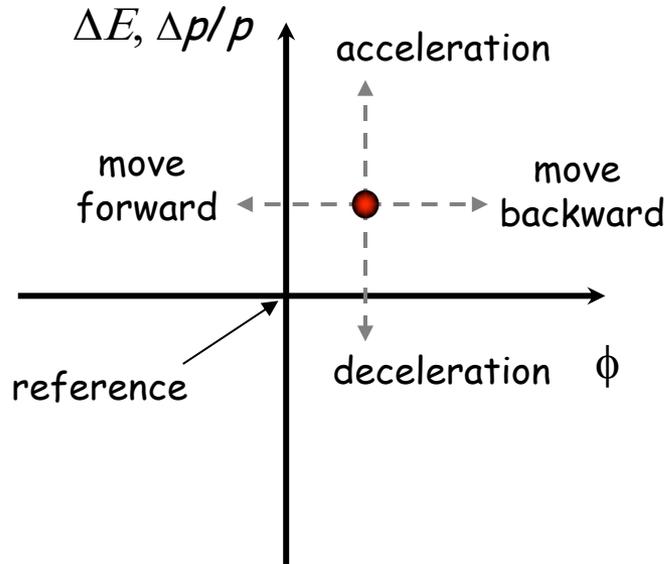

The particle trajectory in the phase space ( $\Delta p/p, \phi$ ) describes its longitudinal motion.

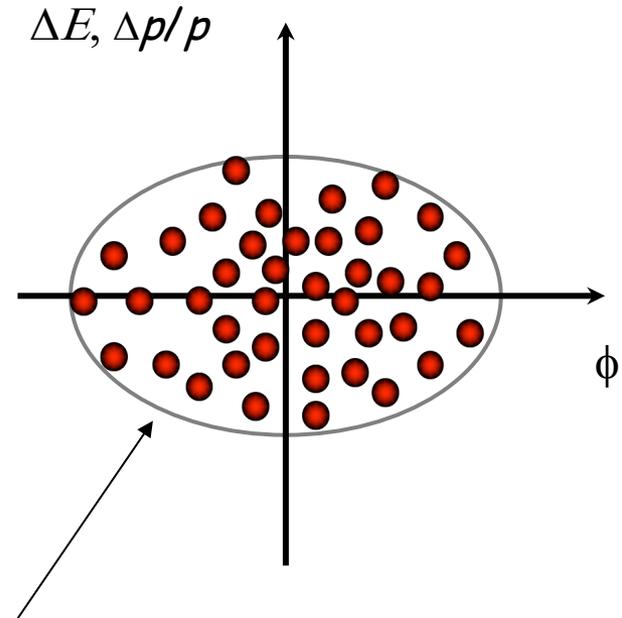


Emittance: phase space area including all the particles


NB: if the emittance contour correspond to a possible orbit in phase space, its shape does not change with time (matched beam)

# Longitudinal Phase Space Motion


Particle **B** performs a synchrotron oscillation around synchronous particle **A**.  
Plotting this motion in longitudinal phase space gives:

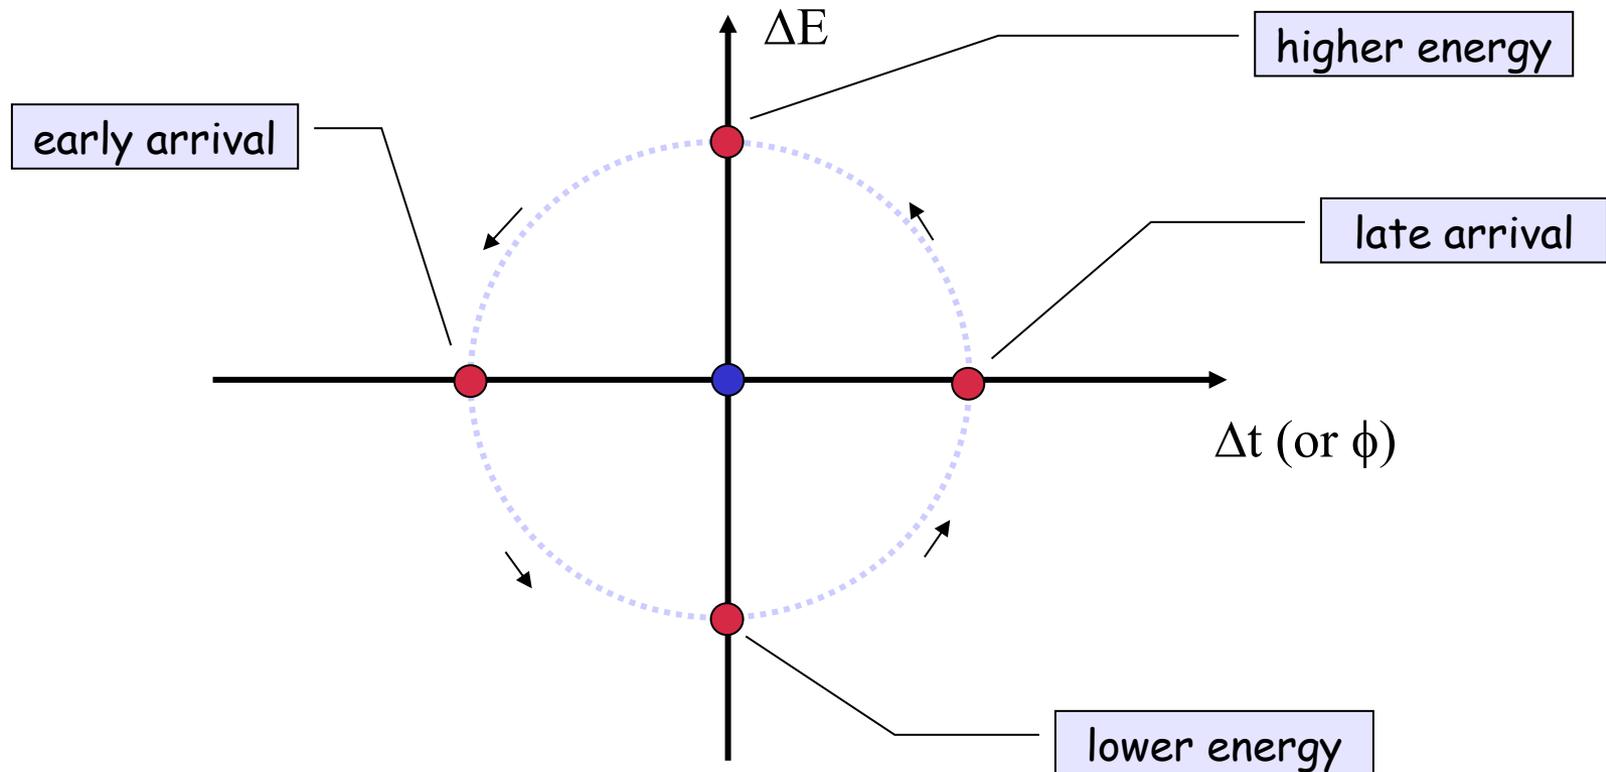

# Synchrotron oscillations - No acceleration

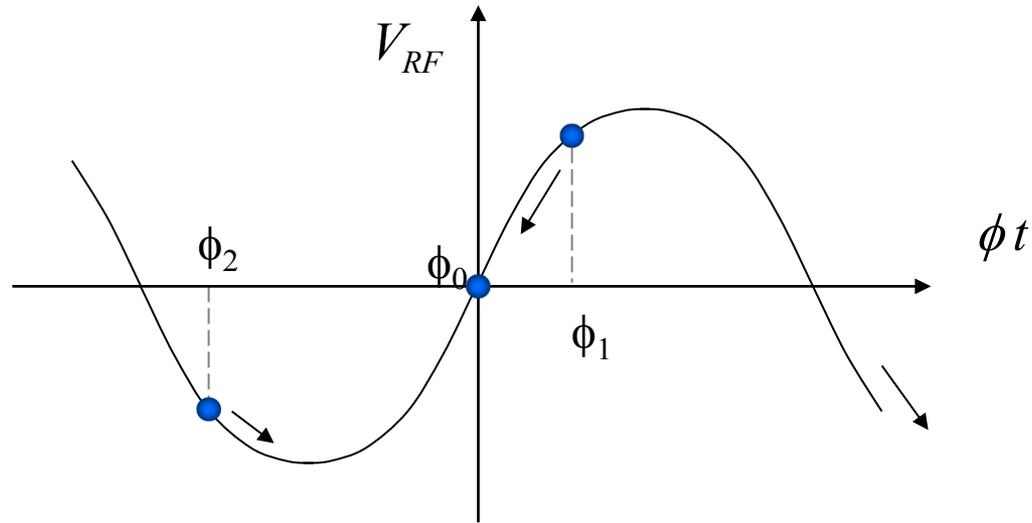

Phase space picture

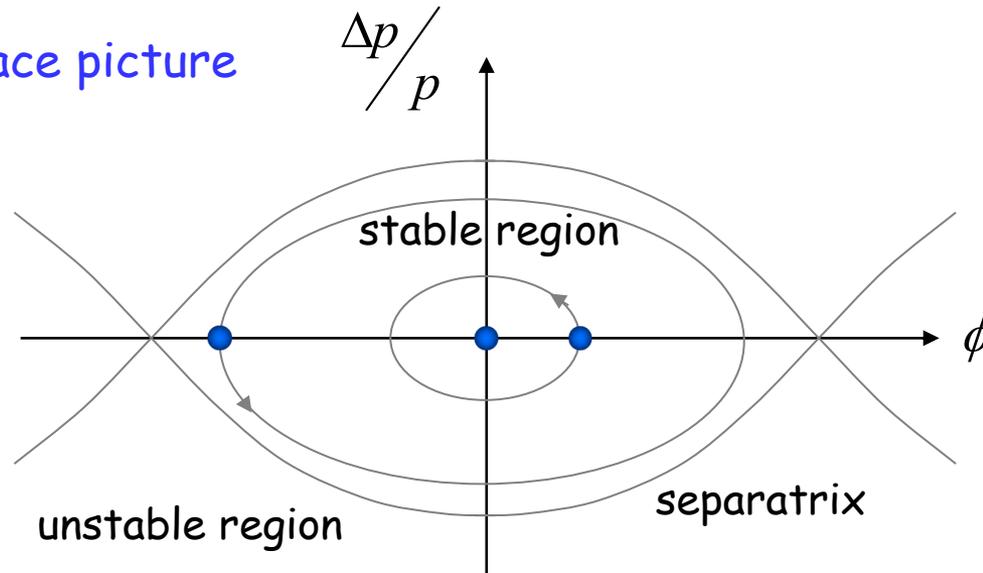


# Synchrotron motion in phase space

The restoring force is **non-linear**.


⇒ speed of motion depends on position in phase-space

(here shown for a stationary bucket)

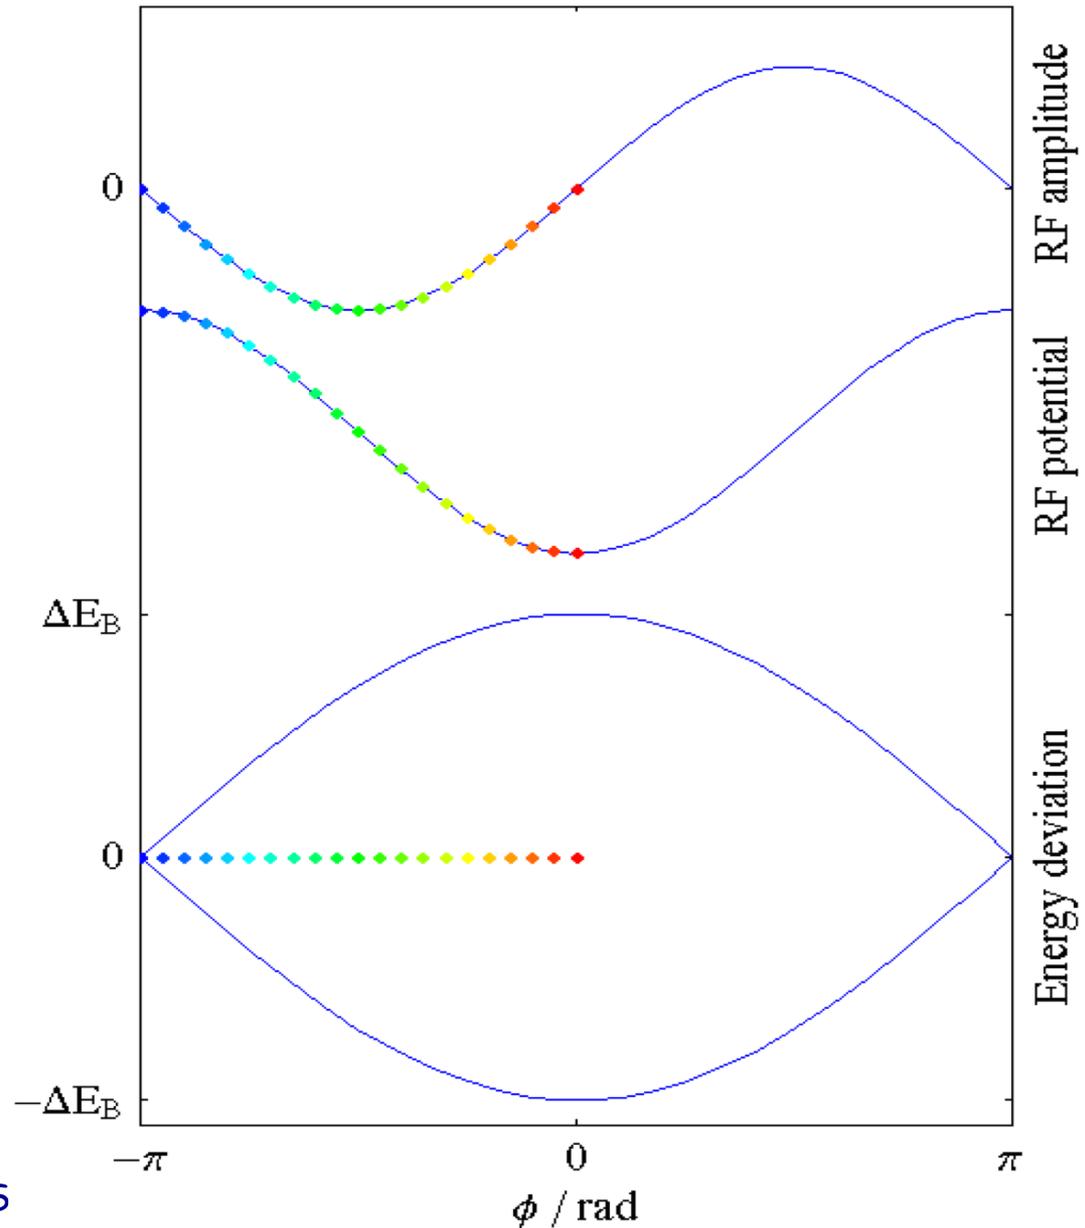

# Synchrotron motion in phase space


$\Delta E$ - $\phi$  phase space of a **stationary bucket**  
(when there is **no acceleration**)

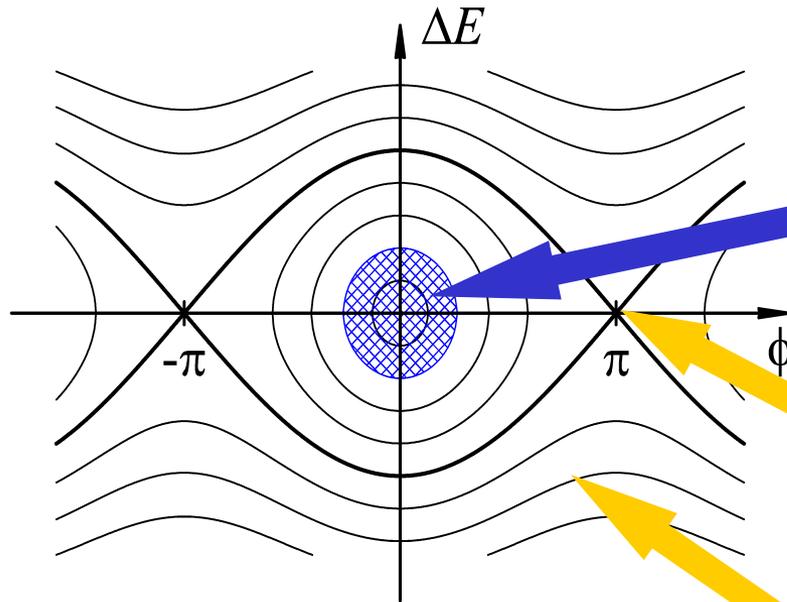

**Bucket area:** area enclosed by the separatrix  
The area covered by particles is the longitudinal emittance.

**Dynamics of a particle**  
Non-linear, conservative oscillator → e.g. pendulum


Particle inside the separatrix:



Particle at the unstable fix-point:




Particle outside the separatrix:



# (Stationary) Bunch & Bucket

The **bunches** of the beam **fill** usually **a part of** the **bucket** area.

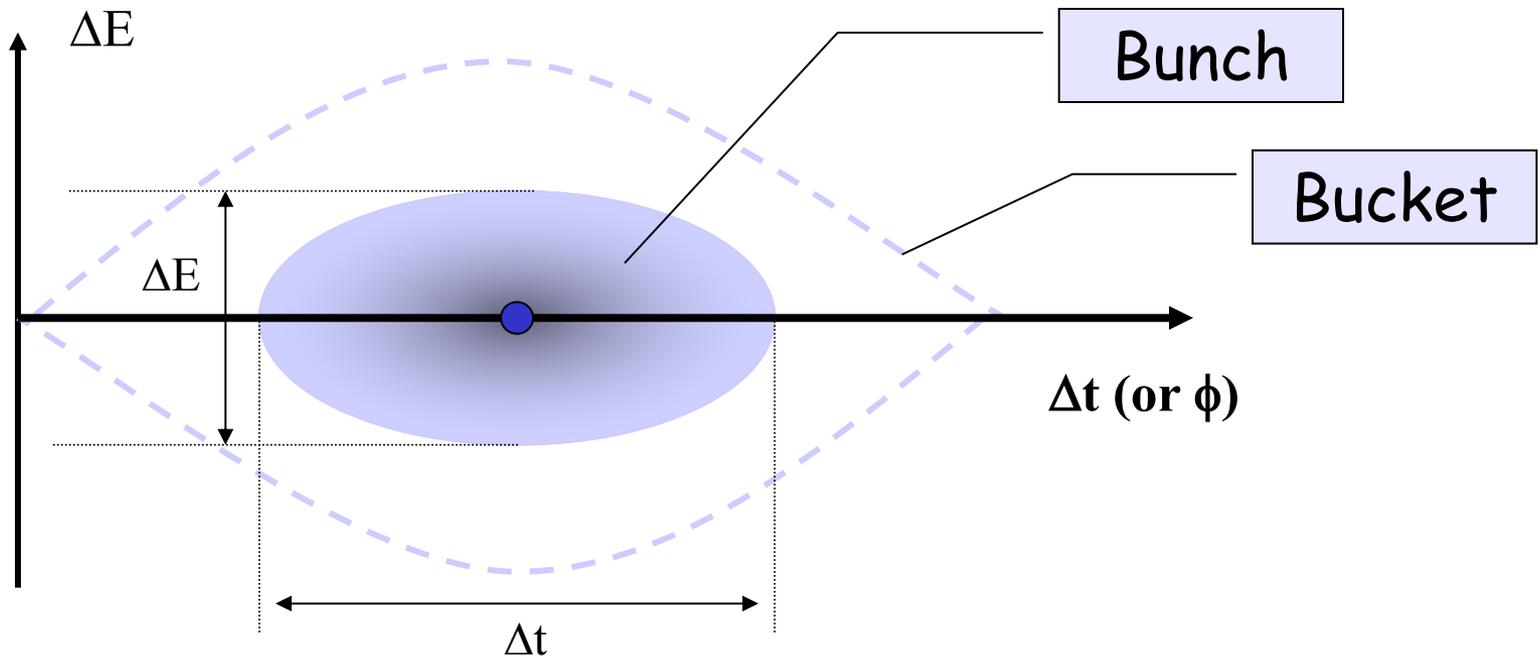

Bucket area = longitudinal Acceptance [eVs]


Bunch area = longitudinal beam emittance =  $4\pi \sigma_E \sigma_t$  [eVs]

Attention: Different definitions are used!


# Synchrotron oscillations (with acceleration)

Case with acceleration  $B$  increasing

$$\gamma < \gamma_t$$

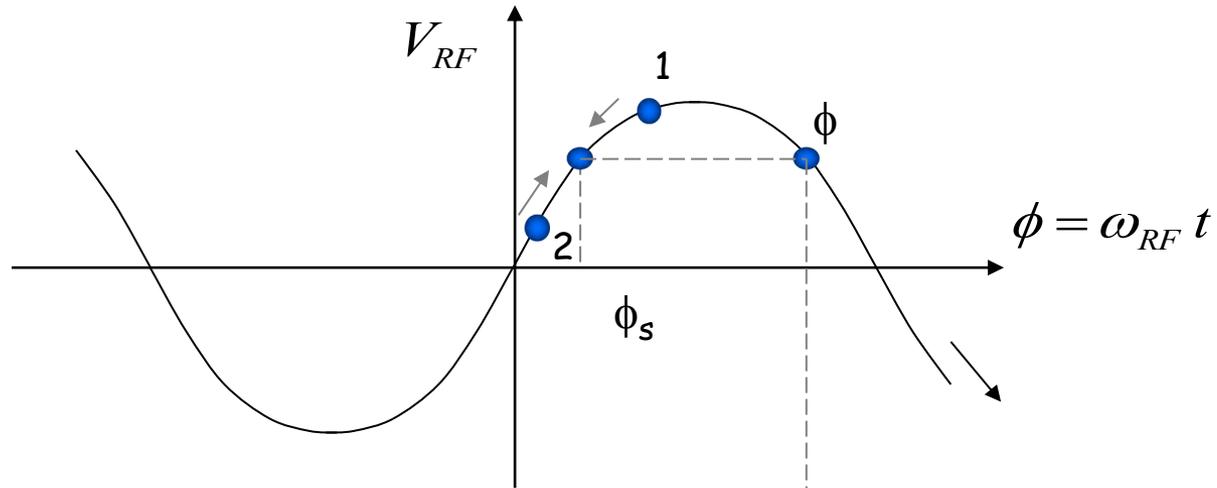


Phase space picture

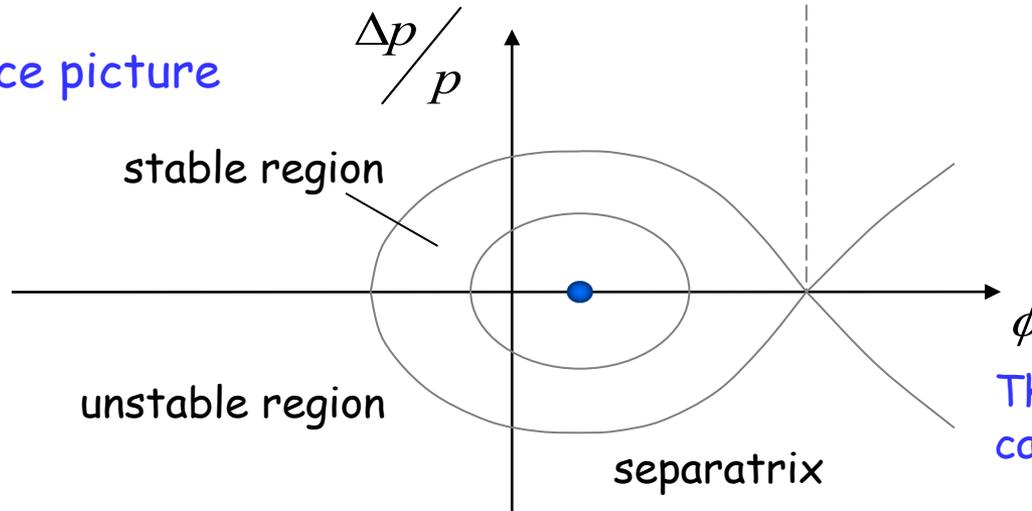

$$\phi_s < \phi < \pi - \phi_s$$

The symmetry of the case  $B = \text{const.}$  is lost

# RF Acceptance versus Synchronous Phase

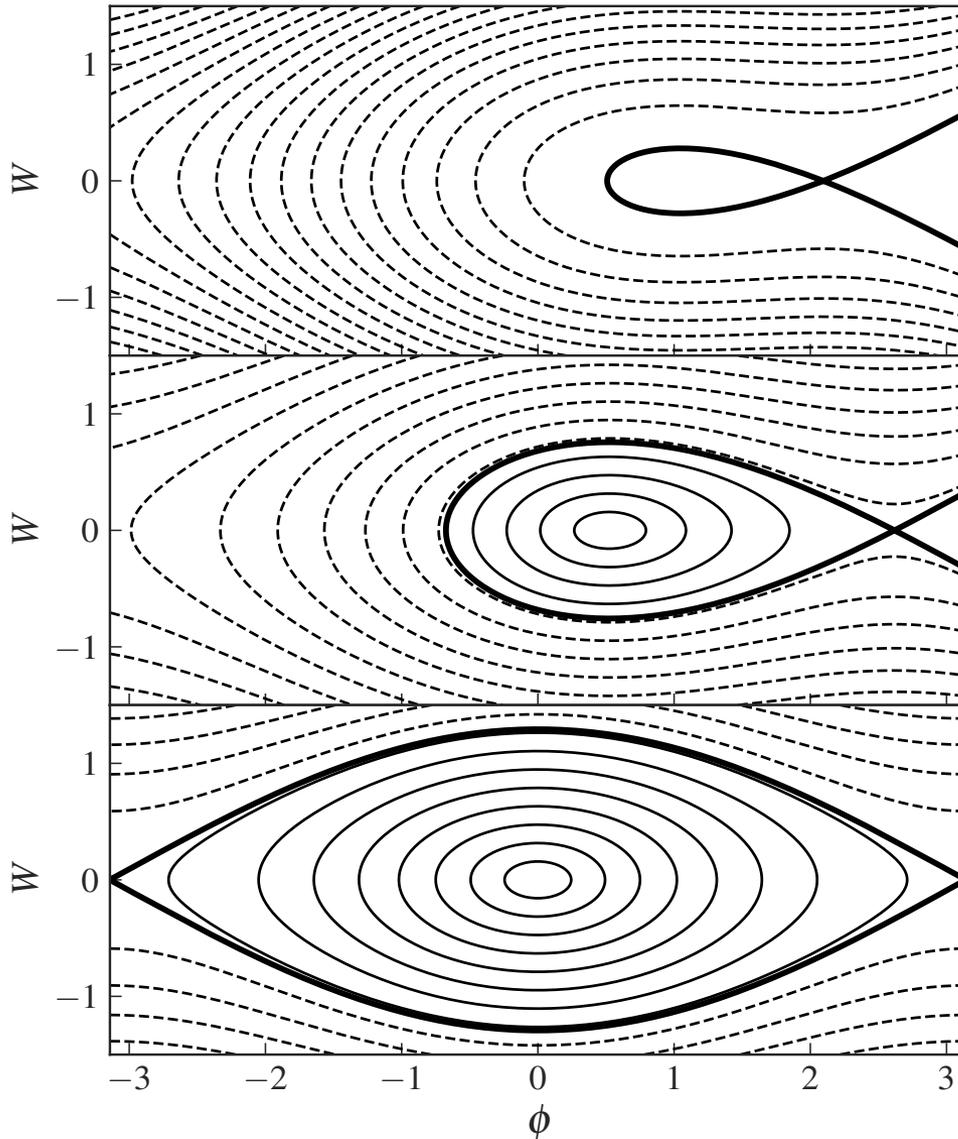

The **areas of stable motion** (closed trajectories) are called "**BUCKET**". The number of circulating buckets is equal to "h".

The phase extension of the **bucket is maximum** for  $\phi_s = 180^\circ$  (or  $0^\circ$ ) which means **no acceleration**.

During **acceleration**, the buckets get **smaller**, both in length and **energy acceptance** (see appendix).

**=> Injection preferably without acceleration.**


# Longitudinal Motion with Synchrotron Radiation

Synchrotron radiation energy-loss energy dependant:

$$U_0 = \frac{4}{3} \pi \frac{r_e}{(m_0 c^2)^3} \frac{E^4}{\rho}$$

During one period of synchrotron oscillation:

- when the particle is in the upper half-plane, it loses more energy per turn, its energy gradually reduces

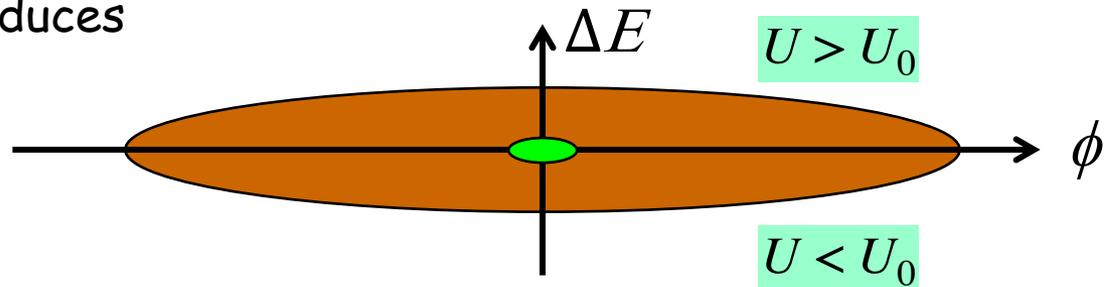

- when the particle is in the lower half-plane, it loses less energy per turn, but receives  $U_0$  on the average, so its energy deviation gradually reduces

The phase space trajectory spirals towards the origin (limited by quantum excitations)

=> The **synchrotron motion** is **damped** toward an **equilibrium bunch length** and **energy spread**.

$$\sigma_\tau = \frac{\alpha}{\Omega_s} \left( \frac{\sigma_\varepsilon}{E} \right)$$

# Longitudinal Dynamics in Synchrotrons

Now we will look more quantitatively at the "synchrotron motion".

The RF acceleration process clearly emphasizes two coupled variables, the **energy** gained by the particle and the **RF phase** experienced by the same particle.

Since there is a **well defined synchronous particle** which has always the same **phase**  $\phi_s$ , and the nominal **energy**  $E_s$ , it is sufficient to follow other particles with respect to that particle.

So let's introduce the following reduced variables:

$$\text{revolution frequency : } \Delta f_r = f_r - f_{rs}$$

$$\text{particle RF phase : } \Delta\phi = \phi - \phi_s$$

$$\text{particle momentum : } \Delta p = p - p_s$$

$$\text{particle energy : } \Delta E = E - E_s$$

$$\text{azimuth angle : } \Delta\theta = \theta - \theta_s$$

# Equations of Longitudinal Motion

In these reduced variables, the **equations of motion** are (see Appendix):

$$\frac{\Delta E}{\omega_{rs}} = -\frac{p_s R_s}{h \eta \omega_{rs}} \frac{d(\Delta \phi)}{dt} = -\frac{p_s R_s}{h \eta \omega_{rs}} \dot{\phi}$$

$$2\pi \frac{d}{dt} \left( \frac{\Delta E}{\omega_{rs}} \right) = e \hat{V} (\sin \phi - \sin \phi_s)$$

deriving and combining

$$\frac{d}{dt} \left[ \frac{R_s p_s}{h \eta \omega_{rs}} \frac{d\phi}{dt} \right] + \frac{e \hat{V}}{2\pi} (\sin \phi - \sin \phi_s) = 0$$

This second order equation is non linear. Moreover the parameters within the bracket are in general slowly varying with time.

We will simplify in the following...

# Small Amplitude Oscillations

Let's assume constant parameters  $R_s$ ,  $p_s$ ,  $\omega_s$  and  $\eta$ :

$$\ddot{\phi} + \frac{\Omega_s^2}{\cos\phi_s} (\sin\phi - \sin\phi_s) = 0$$

with

$$\Omega_s^2 = \frac{h\eta\omega_{rs}e\hat{V}\cos\phi_s}{2\pi R_s p_s}$$

Consider now **small phase deviations** from the reference particle:

$$\sin\phi - \sin\phi_s = \sin(\phi_s + \Delta\phi) - \sin\phi_s \cong \cos\phi_s \Delta\phi \quad (\text{for small } \Delta\phi)$$

and the corresponding linearized motion reduces to a **harmonic oscillation**:

$$\ddot{\phi} + \Omega_s^2 \Delta\phi = 0 \quad \text{where } \Omega_s \text{ is the } \text{synchrotron angular frequency}.$$



The **synchrotron tune**  $\nu_s$  is the number of synchrotron oscillations per revolution:

$$\nu_s = \Omega_s / \omega_r$$


See Appendix for large amplitude treatment and further details.

# Injection: Effect of a Mismatch


Injected bunch: short length and large energy spread  
 after 1/4 synchrotron period: longer bunch with a smaller energy spread.

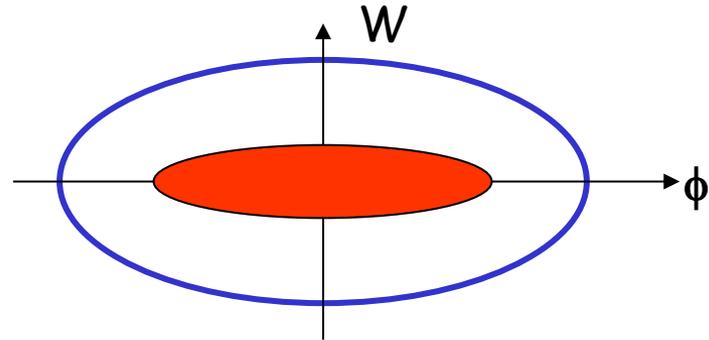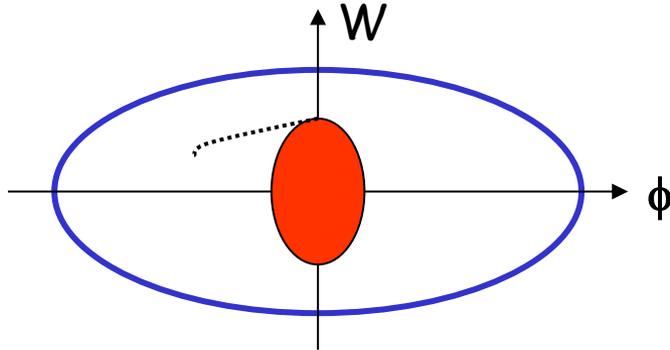


For **larger amplitudes**, the angular phase space motion is slower  
 (1/8 period shown below)  $\Rightarrow$  can lead to **filamentation** and **emittance growth**

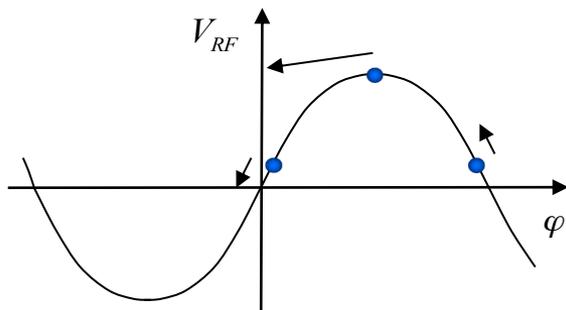

restoring force is non-linear

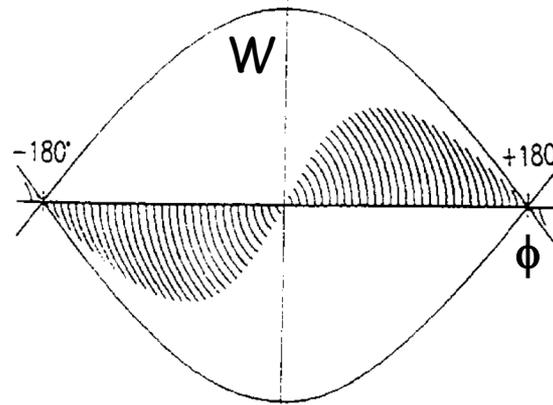

stationary bucket

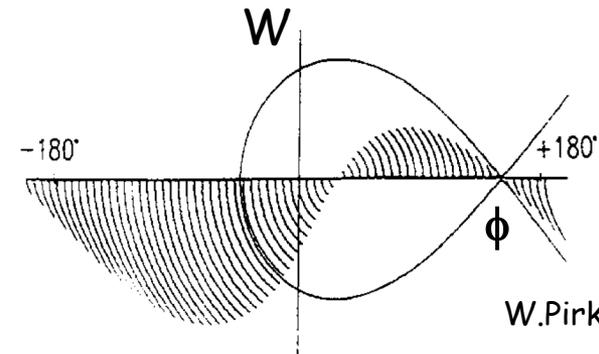


accelerating bucket

W.Pirkel

## Effect of a Mismatch (2)


- Long. emittance is only preserved for **correct RF voltage**

Matched case

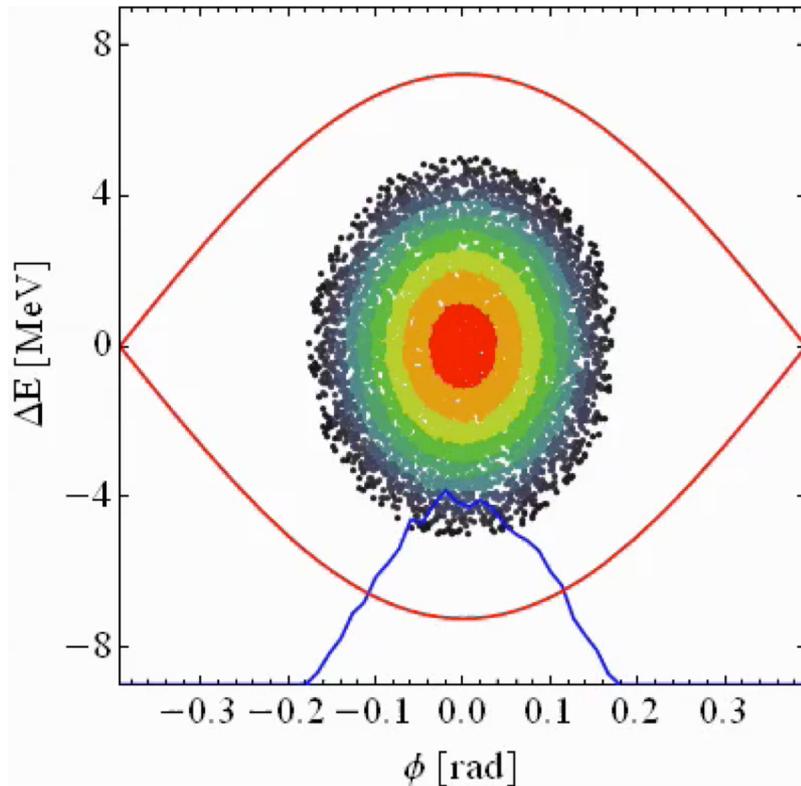

→ Bunch is fine, longitudinal emittance remains constant

Longitudinal mismatch

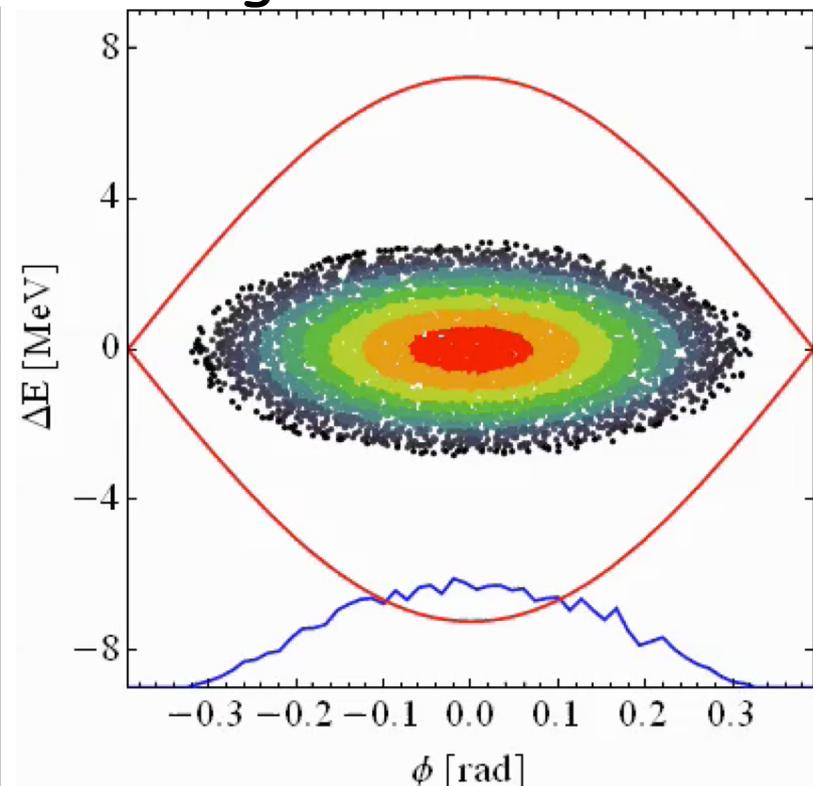


→ Dilution of bunch results in increase of long. emittance


## Effect of a Mismatch (3)

Evolution of an injected beam for the first 100 turns.

For a mismatched transfer, the emittance increases (right).

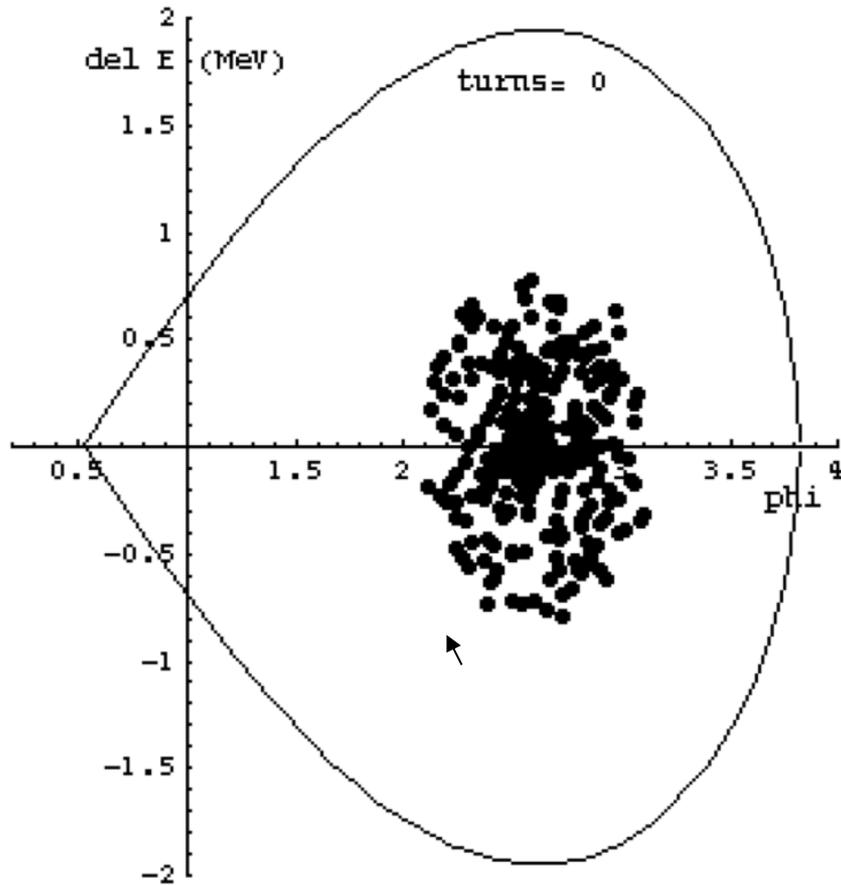

matched beam

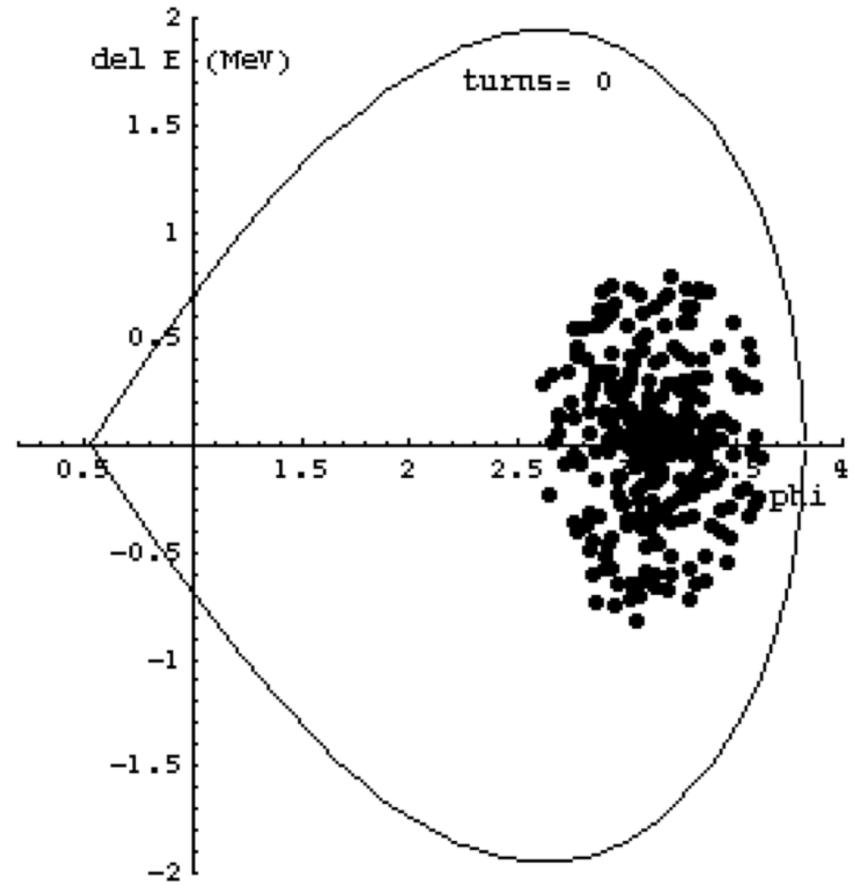


mismatched beam - **phase error**


# Phase Space Tomography

We can reconstruct the phase space distribution of the beam.


- Longitudinal bunch profiles over a number of turns
- Parameters determining  $\Omega_s$

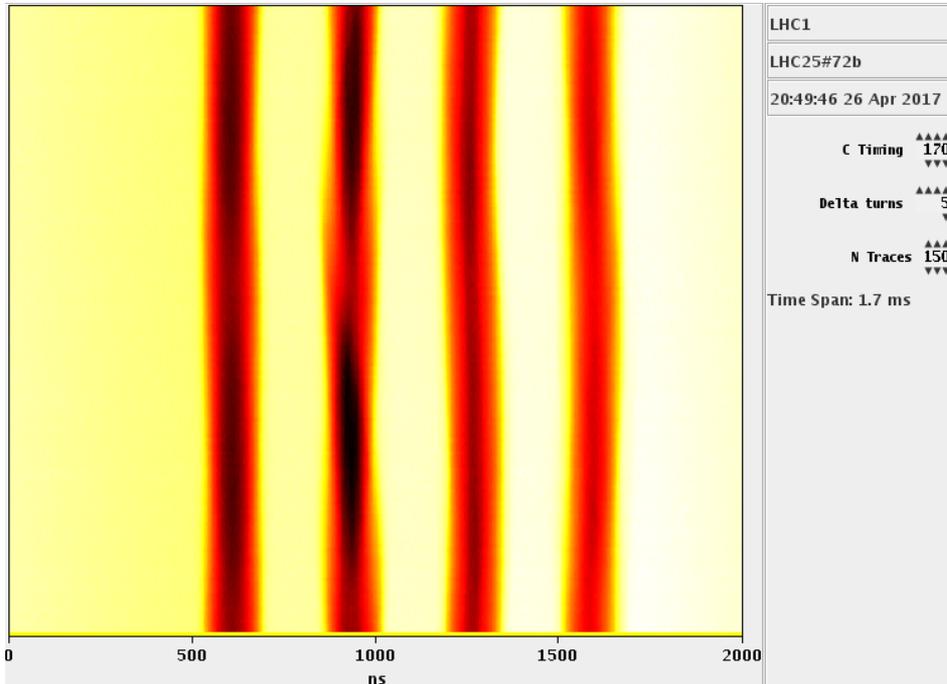

1st  
bunch

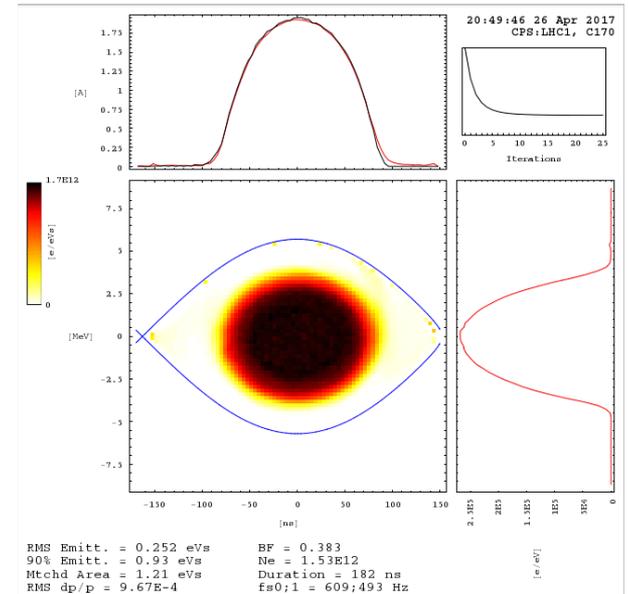


2nd  
bunch

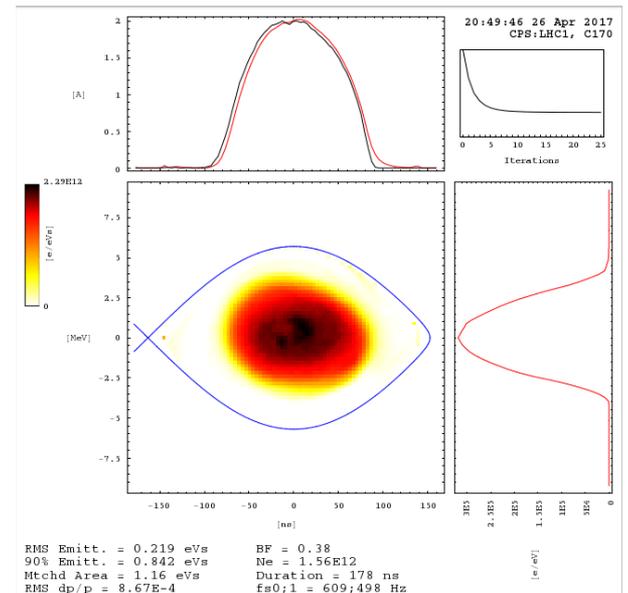

# Bunch Rotation



Phase space motion can be used to make short bunches.

Start with a long bunch and extract or recapture when it's short.


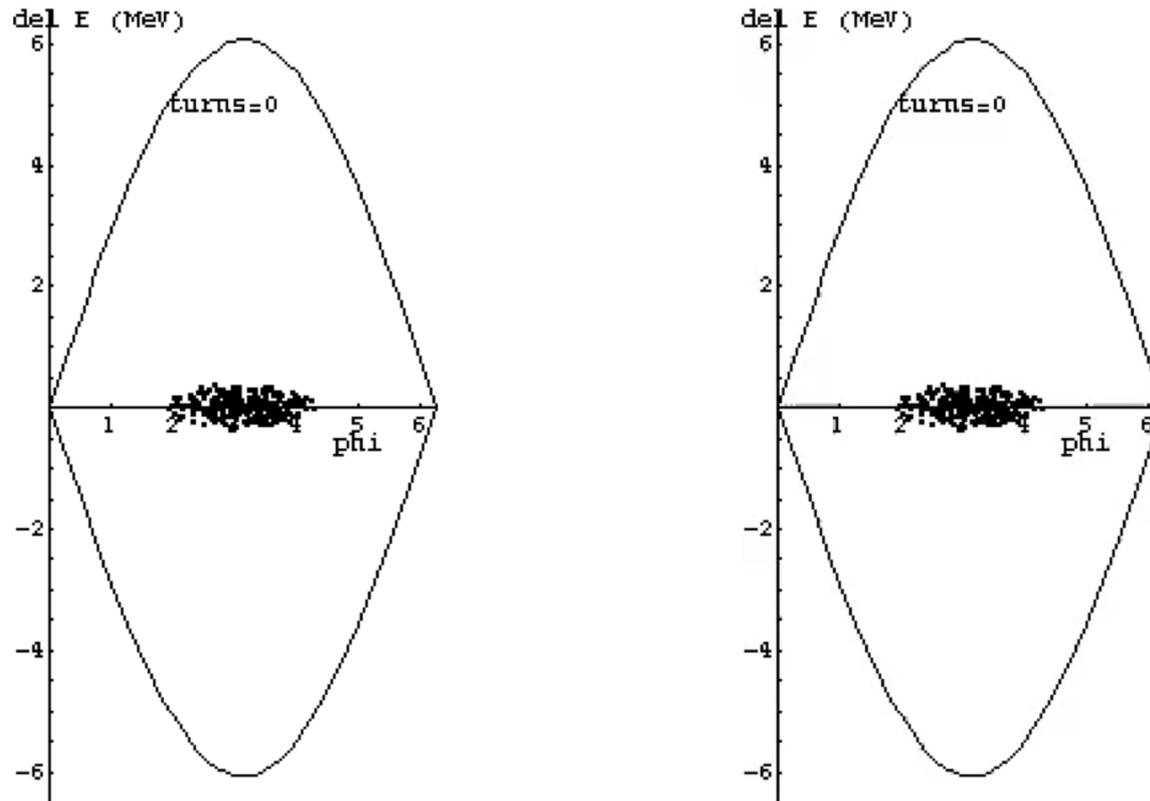


initial beam

# Capture of a Debunched Beam with Fast Turn-On

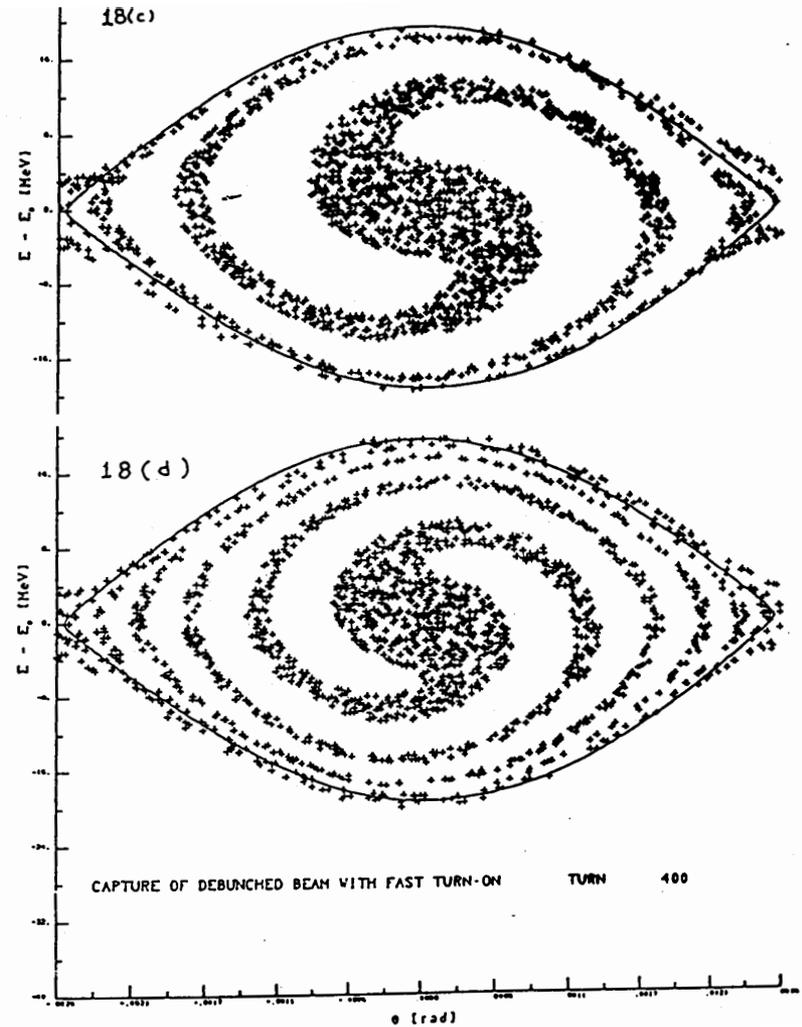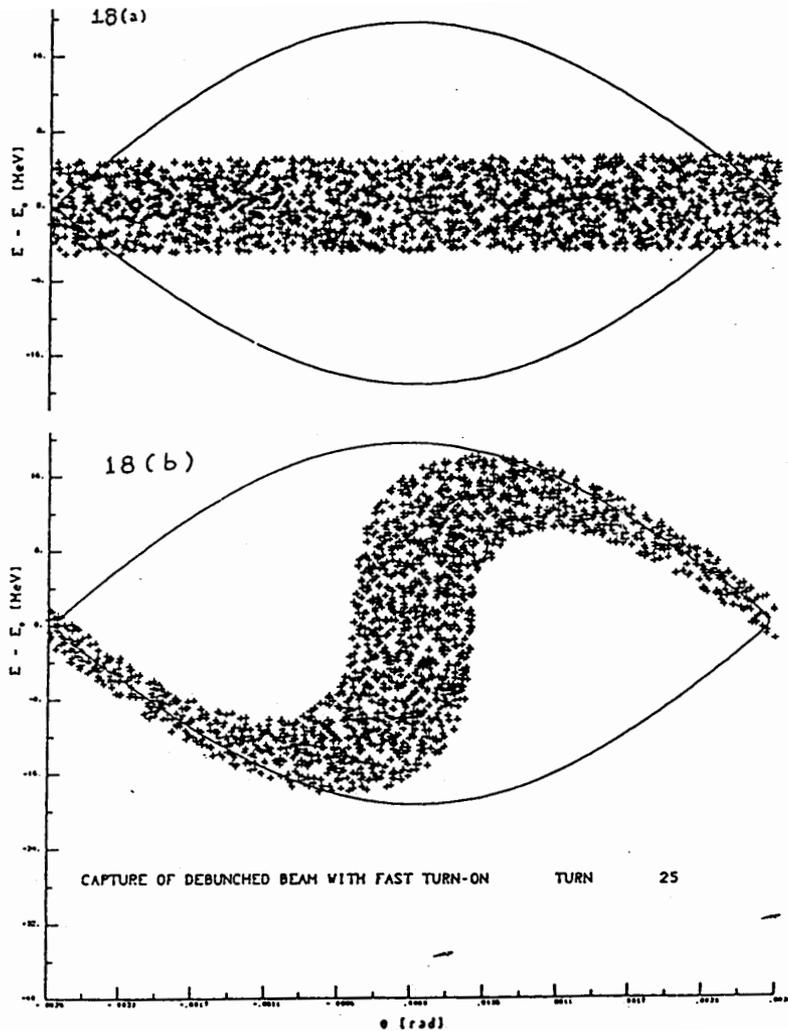

# Capture of a Debunched Beam with Adiabatic Turn-On

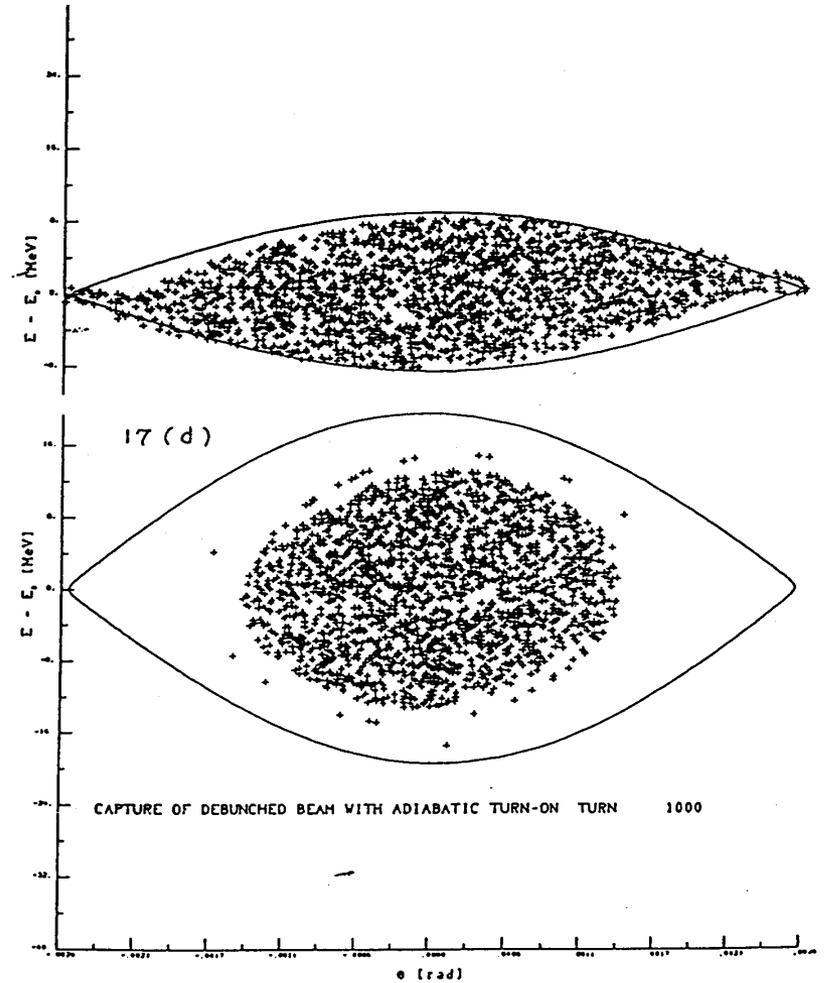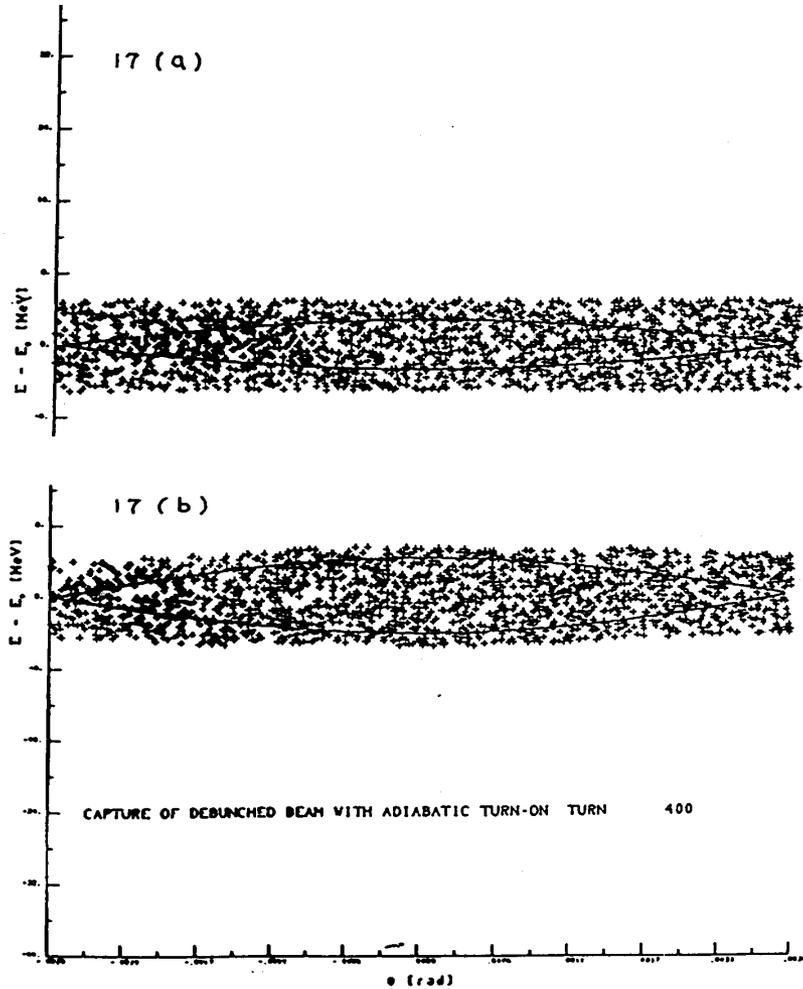


# Potential Energy Function

The longitudinal motion is produced by a force that can be derived from a scalar potential:

$$\frac{d^2\phi}{dt^2} = F(\phi) \qquad F(\phi) = -\frac{\partial U}{\partial \phi}$$

$$U = -\int_0^\phi F(\phi) d\phi = -\frac{\Omega_s^2}{\cos\phi_s} (\cos\phi + \phi \sin\phi_s) - F_0$$

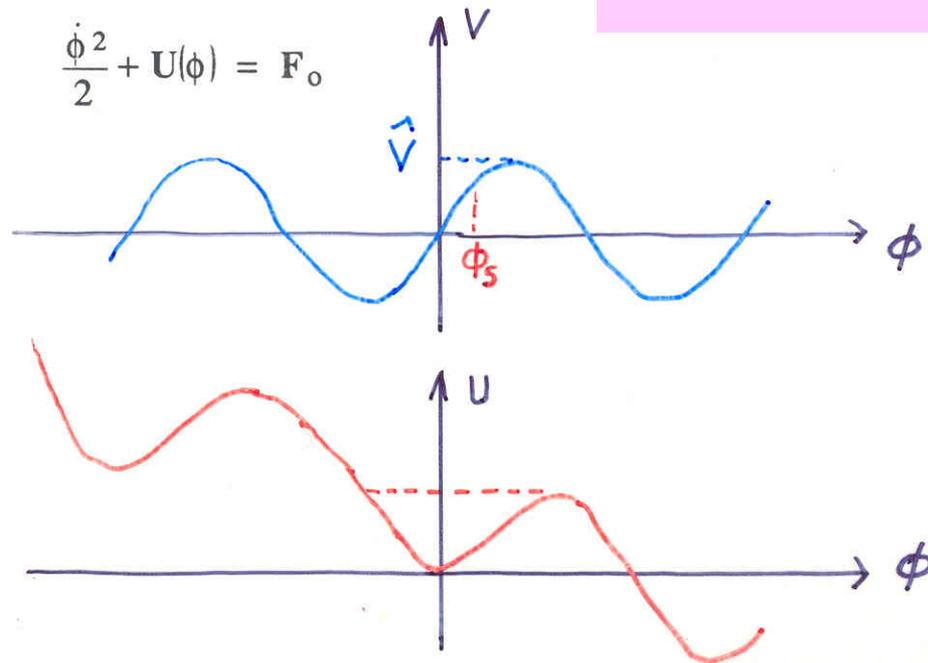

The sum of the potential energy and kinetic energy is constant and by analogy represents the total energy of a non-dissipative system.

## Hamiltonian of Longitudinal Motion

Introducing a new convenient variable,  $W$ , leads to the 1<sup>st</sup> order equations:

$$W = \frac{\Delta E}{\omega_{rs}} \longrightarrow \begin{aligned} \frac{d\phi}{dt} &= -\frac{h\eta\omega_{rs}}{pR} W \\ \frac{dW}{dt} &= \frac{e\hat{V}}{2\pi} (\sin\phi - \sin\phi_s) \end{aligned}$$

The two variables  $\phi, W$  are canonical since these equations of motion can be derived from a Hamiltonian  $H(\phi, W, t)$ :


$$\frac{d\phi}{dt} = \frac{\partial H}{\partial W} \qquad \frac{dW}{dt} = -\frac{\partial H}{\partial \phi}$$

$$H(\phi, W) = -\frac{1}{2} \frac{h\eta\omega_{rs}}{pR} W^2 + \frac{e\hat{V}}{2\pi} [\cos\phi - \cos\phi_s + (\phi - \phi_s) \sin\phi_s]$$


# Hamiltonian of Longitudinal Motion

What does it represent? The total energy of the system!

Surface of  $H(\varphi, W)$

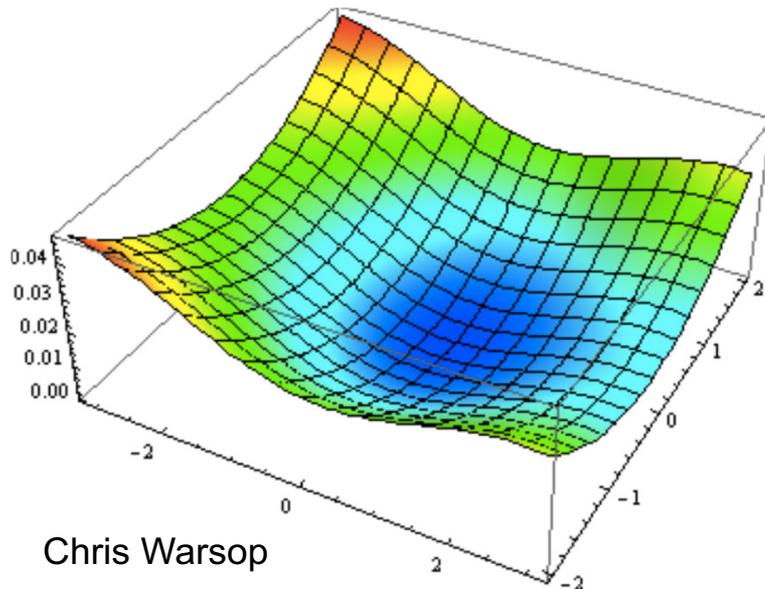

Contours of  $H(\varphi, W)$

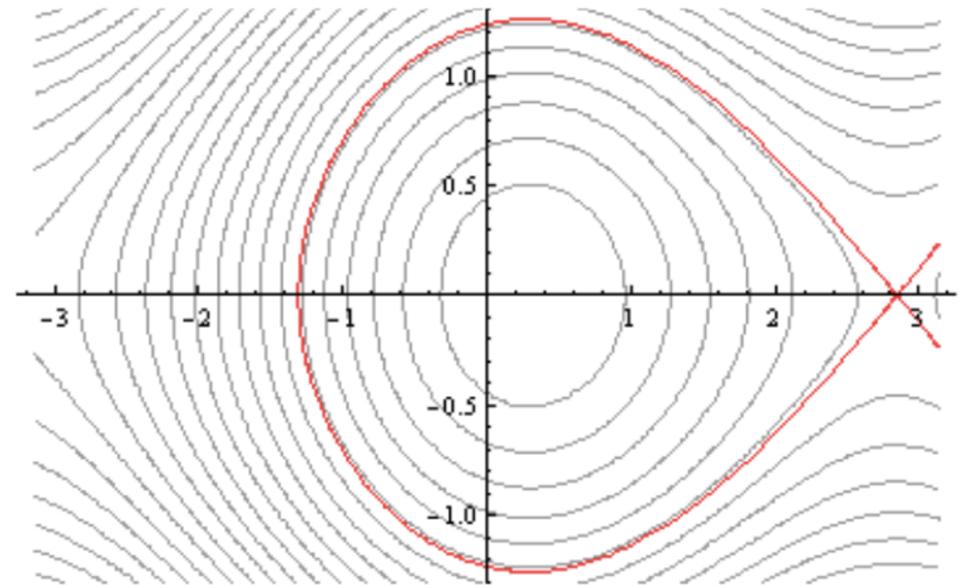

Contours of constant  $H$  are particle trajectories in phase space!  
( $H$  is conserved)

Hamiltonian Mechanics can help us understand some fairly complicated dynamics (multiple harmonics, bunch splitting, ...)

## Summary

- **Synchrotron oscillations** in the longitudinal phase space ( $E, \phi$ )
- Particles perform **oscillations around synchronous phase**
  - synchronous phase depending on acceleration
  - below or above transition
- **Bucket** is the stable region in phase space inside the **separatrix**
  - Bucket size is the **largest without acceleration**
- to **avoid filamentation** and emittance increase it is important to
  - **match the shape** of the bunch to the bucket and
  - inject with the **correct phase and energy**
- **Hamiltonian** approach can deal with fairly complicated dynamics

# Bibliography

- M. Conte, W.W. Mac Kay **An Introduction to the Physics of particle Accelerators**  
(World Scientific, 1991)
- P. J. Bryant and K. Johnsen **The Principles of Circular Accelerators and Storage Rings**  
(Cambridge University Press, 1993)
- D. A. Edwards, M. J. Syphers **An Introduction to the Physics of High Energy Accelerators**  
(J. Wiley & sons, Inc, 1993)
- H. Wiedemann **Particle Accelerator Physics**  
(Springer-Verlag, Berlin, 1993)
- M. Reiser **Theory and Design of Charged Particles Beams**  
(J. Wiley & sons, 1994)
- A. Chao, M. Tigner **Handbook of Accelerator Physics and Engineering**  
(World Scientific 1998)
- K. Wille **The Physics of Particle Accelerators: An Introduction**  
(Oxford University Press, 2000)
- E.J.N. Wilson **An introduction to Particle Accelerators**  
(Oxford University Press, 2001)



And CERN Accelerator Schools (CAS) Proceedings  
In particular: CERN-2014-009  
Advanced Accelerator Physics - CAS

## Acknowledgements

I would like to thank everyone for the material that I have used.

In particular (hope I don't forget anyone):

- Joël Le Duff (from whom I inherited the course)
- Rende Steerenberg
- Gerald Dugan
- Heiko Damerau
- Werner Pirkl
- Mike Syphers
- Roberto Corsini
- Roland Garoby
- Luca Bottura
- Chris Warsop

# Appendix: Momentum Compaction Factor


$$\alpha_c = \frac{p dL}{L dp}$$

$$ds_0 = \rho d\theta$$

$$ds = (\rho + x) d\theta$$

The elementary path difference from the two orbits is:

$$\frac{dl}{ds_0} = \frac{ds - ds_0}{ds_0} = \frac{x}{\rho} \stackrel{\text{definition of dispersion } D_x}{=} \frac{D_x}{\rho} \frac{dp}{p}$$

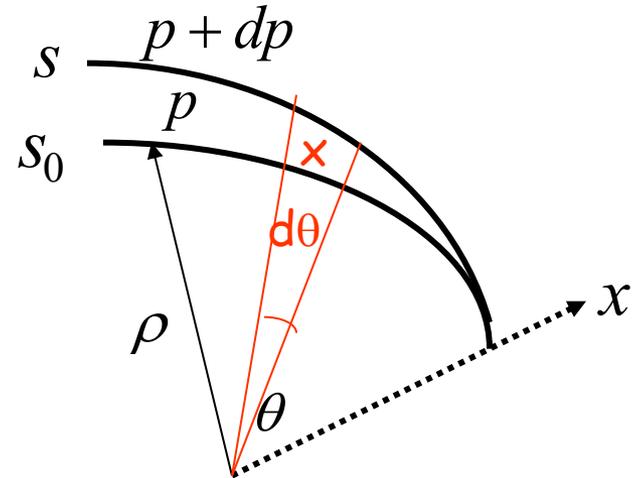

leading to the total change in the circumference:

$$dL = \int_C dl = \int \frac{x}{\rho} ds_0 = \int \frac{D_x}{\rho} \frac{dp}{p} ds_0$$


$$\alpha_c = \frac{1}{L} \int_C \frac{D_x(s)}{\rho(s)} ds_0$$

With  $\rho = \infty$  in straight sections we get:

$$\alpha_c = \frac{\langle D_x \rangle_m}{R}$$

$\langle \rangle_m$  means that the average is considered over the bending magnet only

# Appendix: First Energy-Phase Equation

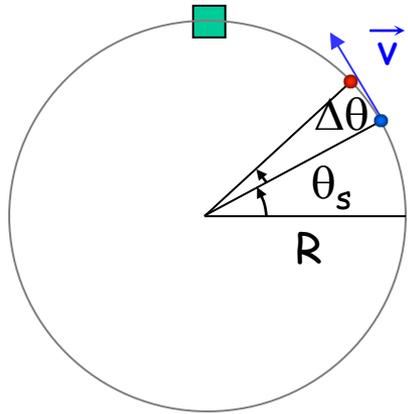

$$f_{RF} = h f_r \Rightarrow \Delta\phi = -h \Delta\theta \quad \text{with} \quad \theta = \int \omega dt$$

particle ahead arrives earlier  
 $\Rightarrow$  smaller RF phase

For a given particle with respect to the reference one:

$$\Delta\omega = \frac{d}{dt} (\Delta\theta) = -\frac{1}{h} \frac{d}{dt} (\Delta\phi) = -\frac{1}{h} \frac{d\phi}{dt}$$

Since:  $\eta = \frac{p_s}{\omega_{rs}} \left( \frac{d\omega}{dp} \right)_s$  and

$$E^2 = E_0^2 + p^2 c^2$$

$$\Delta E = v_s \Delta p = \omega_{rs} R_s \Delta p$$

one gets:

$$\frac{\Delta E}{\omega_{rs}} = -\frac{p_s R_s}{h \eta \omega_{rs}} \frac{d(\Delta\phi)}{dt} = -\frac{p_s R_s}{h \eta \omega_{rs}} \dot{\phi}$$

## Appendix: Second Energy-Phase Equation

The rate of energy gained by a particle is:  $\frac{dE}{dt} = e\hat{V}\sin\phi \frac{\omega_r}{2\pi}$

The rate of relative energy gain with respect to the reference particle is then:

$$2\pi\Delta\left(\frac{\dot{E}}{\omega_r}\right) = e\hat{V}(\sin\phi - \sin\phi_s)$$

Expanding the left-hand side to first order:

$$\Delta(\dot{E}T_r) \cong \dot{E}\Delta T_r + T_{rs}\Delta\dot{E} = \Delta E\dot{T}_r + T_{rs}\Delta\dot{E} = \frac{d}{dt}(T_{rs}\Delta E)$$


leads to the second energy-phase equation:

$$2\pi\frac{d}{dt}\left(\frac{\Delta E}{\omega_{rs}}\right) = e\hat{V}(\sin\phi - \sin\phi_s)$$

# Appendix: Stability condition for $\phi_s$

Stability is obtained when  $\Omega_s$  is real and so  $\Omega_s^2$  positive:

$$\Omega_s^2 = \frac{e \hat{V}_{RF} \eta h \omega_s}{2\pi R_s p_s} \cos \phi_s \Rightarrow \Omega_s^2 > 0 \Leftrightarrow \eta \cos \phi_s > 0$$

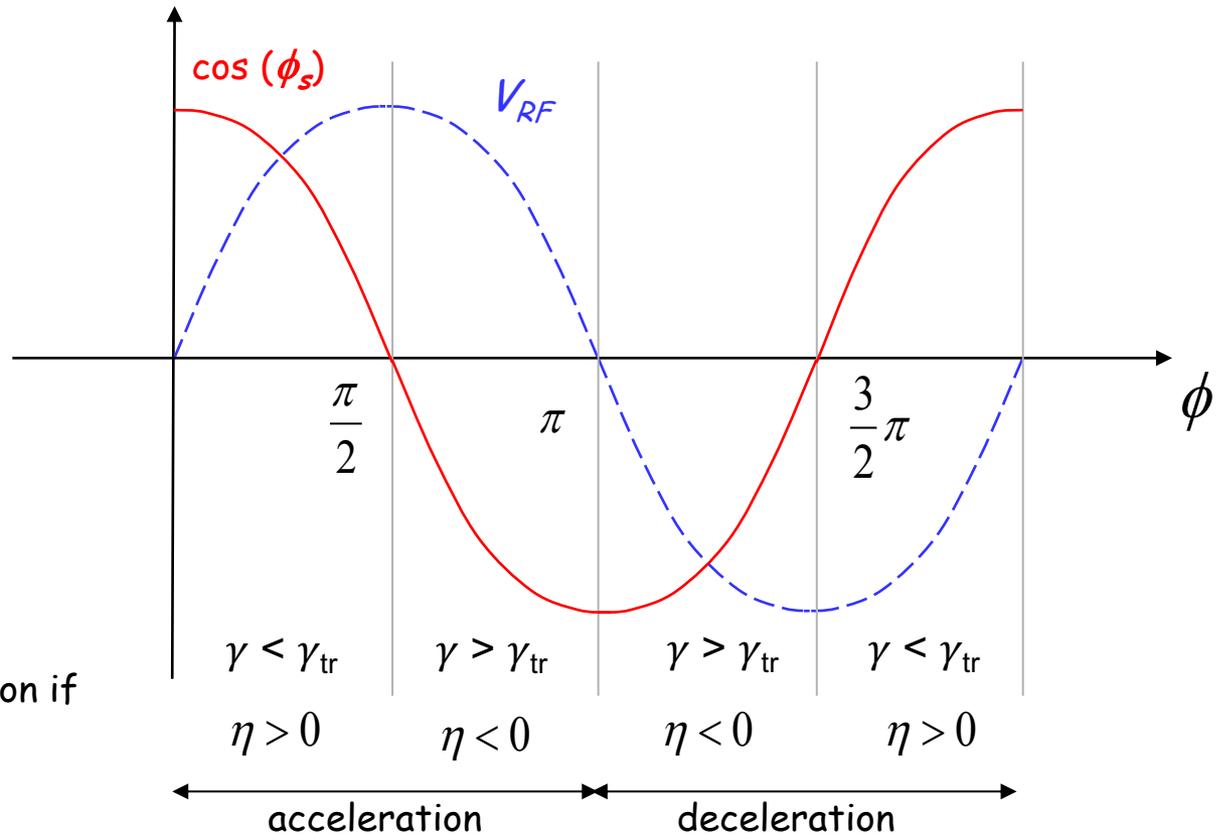

Stable in the region if


# Appendix: Stationary Bucket - Separatrix

This is the case  $\sin\phi_s=0$  (no acceleration) which means  $\phi_s=0$  or  $\pi$ . The equation of the separatrix for  $\phi_s= \pi$  (above transition) becomes:

$$\frac{\dot{\phi}^2}{2} + \Omega_s^2 \cos\phi = \Omega_s^2$$

$$\frac{\dot{\phi}^2}{2} = 2\Omega_s^2 \sin^2 \frac{\phi}{2}$$

Replacing the phase derivative by the (canonical) variable  $W$ :

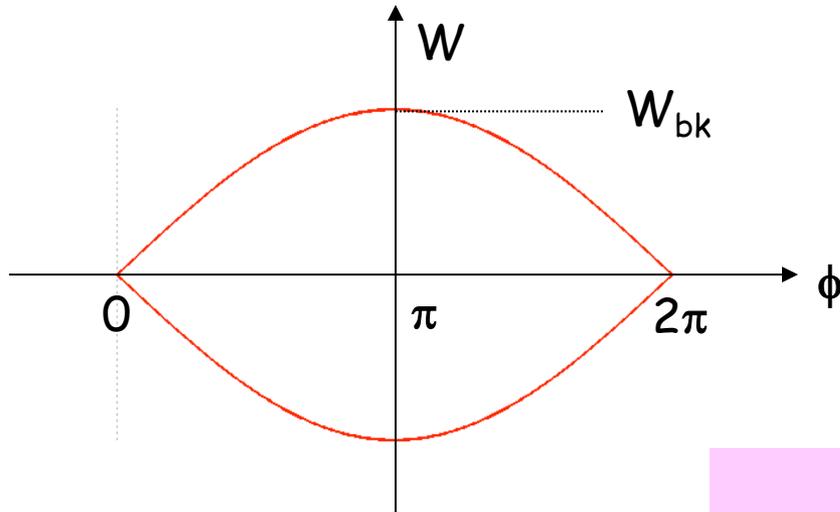

with  $C=2\pi R_s$

$$W = \frac{\Delta E}{\omega_{rf}} = -\frac{p_s R_s}{h\eta \omega_{rf}} \dot{\phi}$$

and introducing the expression for  $\Omega_s$  leads to the following equation for the separatrix:

$$W = \pm \frac{C}{\pi h c} \sqrt{\frac{-e \hat{V} E_s}{2\pi h \eta}} \sin \frac{\phi}{2} = \pm W_{bk} \sin \frac{\phi}{2}$$

## Stationary Bucket (2)

Setting  $\phi=\pi$  in the previous equation gives the height of the bucket:

$$W_{bk} = \frac{C}{\pi h c} \sqrt{\frac{-e \hat{V} E_s}{2 \pi h \eta}}$$

This results in the **maximum energy acceptance**:

$$\Delta E_{\max} = \omega_{rf} W_{bk} = \beta_s \sqrt{2 \frac{-e \hat{V}_{RF} E_s}{\pi \eta h}}$$

The area of the bucket is:  $A_{bk} = 2 \int_0^{2\pi} W d\phi$

Since:  $\int_0^{2\pi} \sin \frac{\phi}{2} d\phi = 4$

one gets:  $A_{bk} = 8W_{bk} = 8 \frac{C}{\pi h c} \sqrt{\frac{-e \hat{V} E_s}{2 \pi h \eta}} \longrightarrow W_{bk} = \frac{A_{bk}}{8}$

## Appendix: Large Amplitude Oscillations

For larger phase (or energy) deviations from the reference the second order differential equation is non-linear:

$$\ddot{\phi} + \frac{\Omega_s^2}{\cos \phi_s} (\sin \phi - \sin \phi_s) = 0 \quad (\Omega_s \text{ as previously defined})$$

Multiplying by  $\dot{\phi}$  and integrating gives an invariant of the motion:

$$\frac{\dot{\phi}^2}{2} - \frac{\Omega_s^2}{\cos \phi_s} (\cos \phi + \phi \sin \phi_s) = I$$

which for small amplitudes reduces to:


$$\frac{\dot{\phi}^2}{2} + \Omega_s^2 \frac{(\Delta\phi)^2}{2} = I' \quad (\text{the variable is } \Delta\phi, \text{ and } \phi_s \text{ is constant})$$

Similar equations exist for the second variable :  $\Delta E \propto d\phi/dt$

## Large Amplitude Oscillations (2)

When  $\phi$  reaches  $\pi - \phi_s$  the force goes to zero and beyond it becomes non restoring.

Hence  $\pi - \phi_s$  is an extreme amplitude for a stable motion which in the phase space  $(\frac{\dot{\phi}}{\Omega_s}, \Delta\phi)$  is shown as closed trajectories.

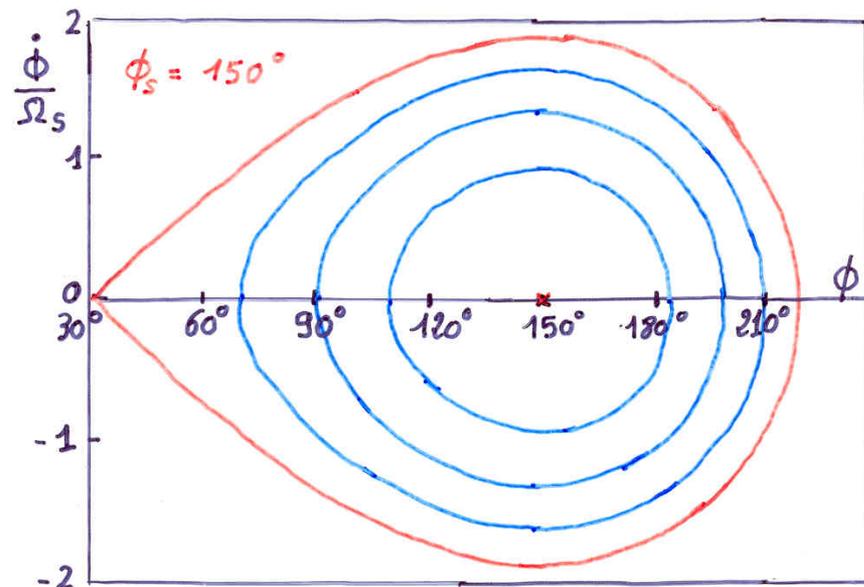

Equation of the **separatrix**:

$$\frac{\dot{\phi}^2}{2} - \frac{\Omega_s^2}{\cos \phi_s} (\cos \phi + \phi \sin \phi_s) = -\frac{\Omega_s^2}{\cos \phi_s} (\cos(\pi - \phi_s) + (\pi - \phi_s) \sin \phi_s)$$

Second value  $\phi_m$  where the separatrix crosses the horizontal axis:

$$\cos \phi_m + \phi_m \sin \phi_s = \cos(\pi - \phi_s) + (\pi - \phi_s) \sin \phi_s$$

## Appendix: Energy Acceptance


From the equation of motion it is seen that  $\dot{\phi}$  reaches an extreme at  $\phi = \phi_s$ .  
Introducing this value into the equation of the separatrix gives:

$$\dot{\phi}_{\max}^2 = 2\Omega_s^2 \left\{ 2 + (2\phi_s - \pi) \tan \phi_s \right\}$$

That translates into an **energy acceptance**:

$$\left( \frac{\Delta E}{E_s} \right)_{\max} = \pm \beta \sqrt{\frac{e\hat{V}}{\pi h \eta E_s} G(\phi_s)}$$

$$G(\phi_s) = [2\cos\phi_s + (2\phi_s - \pi)\sin\phi_s]$$

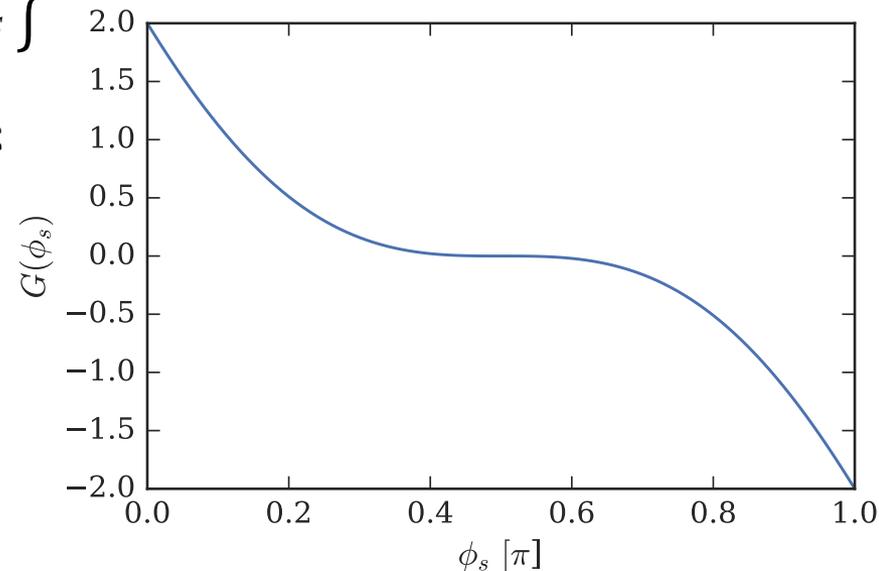

This “**RF acceptance**” depends strongly on  $\phi_s$  and plays an important role for the capture at injection, and the stored beam lifetime.

It's **largest** for  $\phi_s=0$  and  $\phi_s=\pi$  (**no acceleration**, depending on  $\eta$ ).


It becomes smaller during acceleration, when  $\phi_s$  is changing

Need a **higher RF voltage** for **higher acceptance**.

# Bunch Matching into a Stationary Bucket

A particle trajectory inside the separatrix is described by the equation:

$$\frac{\dot{\phi}^2}{2} - \frac{\Omega_s^2}{\cos\phi_s} (\cos\phi + \phi \sin\phi_s) = I \quad \xrightarrow{\phi_s = \pi} \quad \frac{\dot{\phi}^2}{2} + \Omega_s^2 \cos\phi = I$$

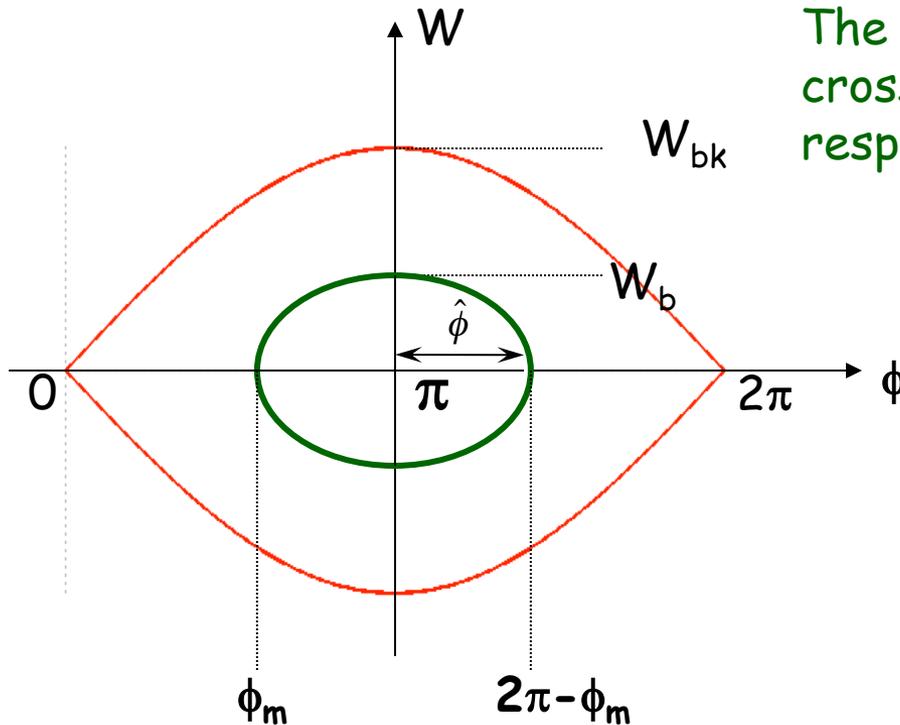

The points where the trajectory crosses the axis are symmetric with respect to  $\phi_s = \pi$

$$\frac{\dot{\phi}^2}{2} + \Omega_s^2 \cos\phi = \Omega_s^2 \cos\phi_m$$

$$\dot{\phi} = \pm \Omega_s \sqrt{2(\cos\phi_m - \cos\phi)}$$

$$W = \pm W_{bk} \sqrt{\cos^2 \frac{\varphi_m}{2} - \cos^2 \frac{\varphi}{2}}$$

$$\cos(\phi) = 2 \cos^2 \frac{\phi}{2} - 1$$

## Bunch Matching into a Stationary Bucket (2)

Setting  $\phi = \pi$  in the previous formula allows to calculate the bunch height:

$$W_b = W_{bk} \cos \frac{\phi_m}{2} = W_{bk} \sin \frac{\hat{\phi}}{2}$$

or:

$$W_b = \frac{A_{bk}}{8} \cos \frac{\phi_m}{2}$$

$$\longrightarrow \left( \frac{\Delta E}{E_s} \right)_b = \left( \frac{\Delta E}{E_s} \right)_{RF} \cos \frac{\phi_m}{2} = \left( \frac{\Delta E}{E_s} \right)_{RF} \sin \frac{\hat{\phi}}{2}$$

This formula shows that for a given bunch energy spread the proper matching of a **shorter bunch** ( $\phi_m$  close to  $\pi$ ,  $\hat{\phi}$  small) will **require** a bigger RF acceptance, hence a **higher voltage**

For small oscillation amplitudes the equation of the ellipse reduces to:

$$W = \frac{A_{bk}}{16} \sqrt{\hat{\phi}^2 - (\Delta\phi)^2} \longrightarrow \left( \frac{16W}{A_{bk}\hat{\phi}} \right)^2 + \left( \frac{\Delta\phi}{\hat{\phi}} \right)^2 = 1$$

Ellipse area is called longitudinal emittance

$$A_b = \frac{\pi}{16} A_{bk} \hat{\phi}^2$$