


LONGITUDINAL beam DYNAMICS in circular accelerators



Frank Tecker
CERN, BE-OP

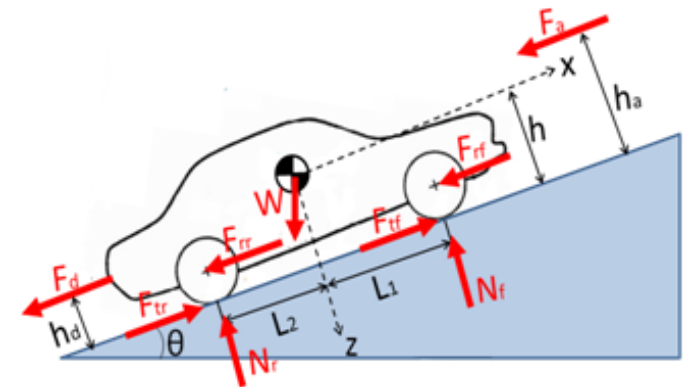

Introduction to Accelerator Physics
Budapest, 2-14/10/2016


Summary of the 2 lectures:

- Introduction
- Circular accelerators: Cyclotron / Synchrotron
- Dispersion Effects in Synchrotron
- Stability and Longitudinal Phase Space Motion
- Stationary Bucket
- Injection Matching
- RF manipulations in the PS

More related lectures:

- Linacs - Davide Alesini
- Cyclotrons - Mike Seidel
- RF Systems - myself
- Electron Beam Dynamics - Lenny Rivkin

The CERN Accelerator Complex

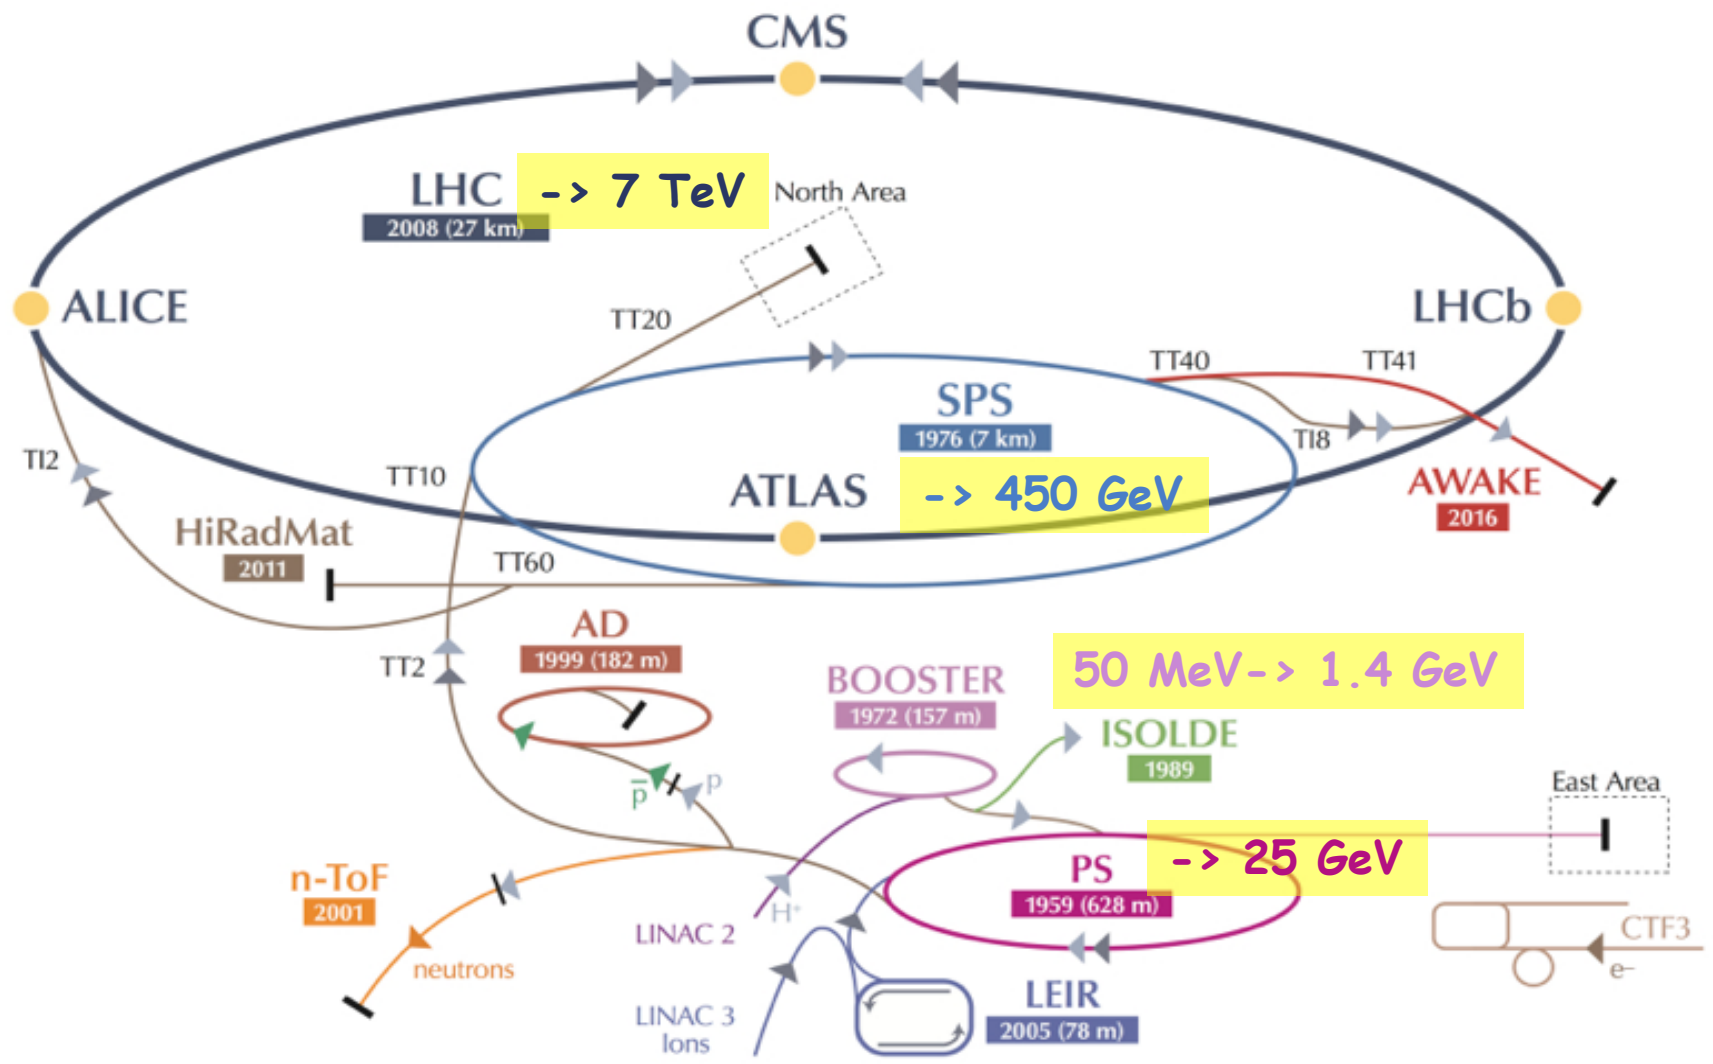

▶ p (proton) ▶ ion ▶ neutrons ▶ \bar{p} (antiproton) ▶ electron ▶ \leftrightarrow proton/antiproton conversion

Particle types and acceleration

The accelerating system will depend upon the **evolution** of the **particle velocity** along the system

- **electrons** reach a **constant velocity** at relatively low energy
- **heavy particles** reach a constant velocity only at very high energy
 - > we need different types of resonators, optimized for different velocities
 - > the revolution frequency will vary, so the **RF frequency** will be **changing**

Particle rest mass:


electron 0.511 MeV

proton 938 MeV

²³⁹U ~220000 MeV

Relativistic
gamma factor:

$$\gamma = \frac{E}{E_0} = \frac{m}{m_0}$$

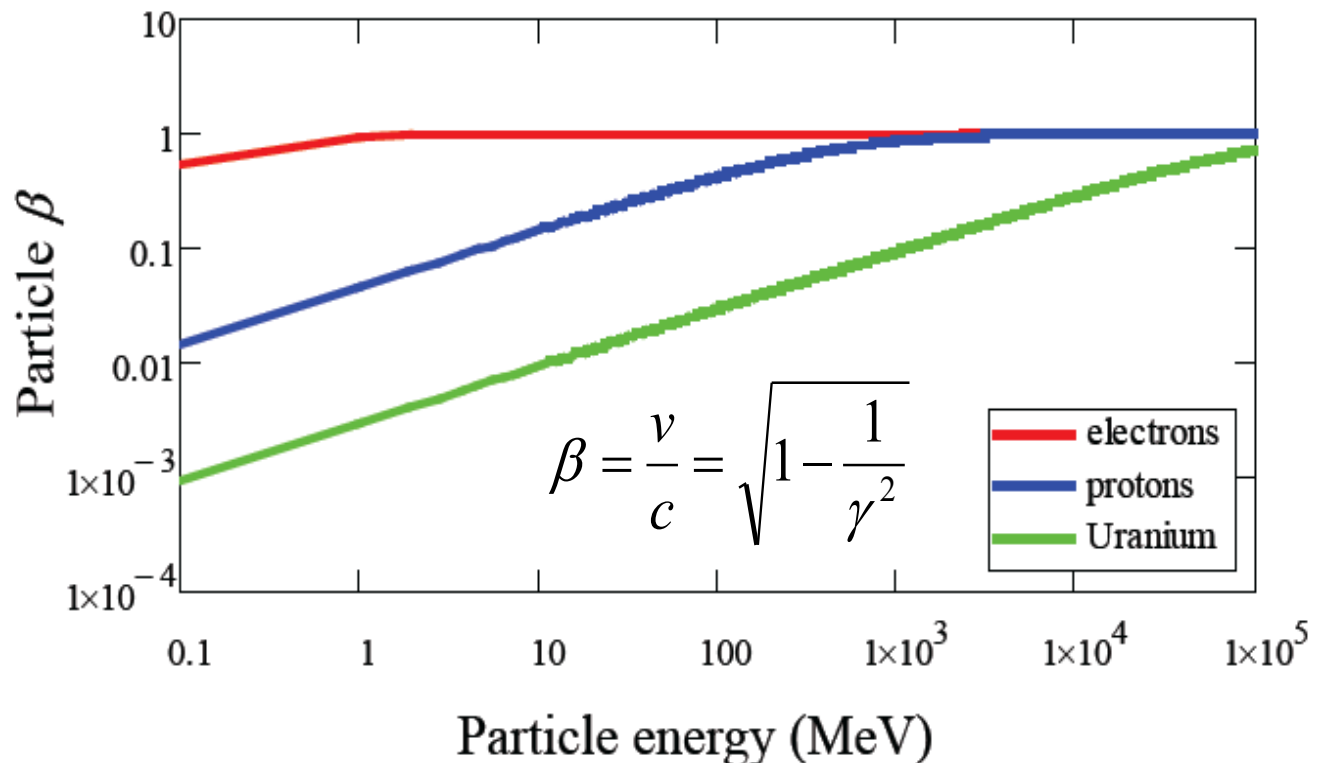

Velocity, Energy and Momentum

normalized velocity $\beta = \frac{v}{c} = \sqrt{1 - \frac{1}{\gamma^2}}$

=> electrons almost reach the speed of light very quickly (few MeV range)



total energy
rest energy

$$E = \gamma m_0 c^2$$

$$\gamma = \frac{E}{E_0} = \frac{m}{m_0} = \frac{1}{\sqrt{1 - \frac{v^2}{c^2}}} = \frac{1}{\sqrt{1 - \beta^2}}$$

Momentum $p = mv = \frac{E}{c^2} \beta c = \beta \frac{E}{c} = \beta \gamma m_0 c$

=> Magnetic field needs to follow the momentum increase

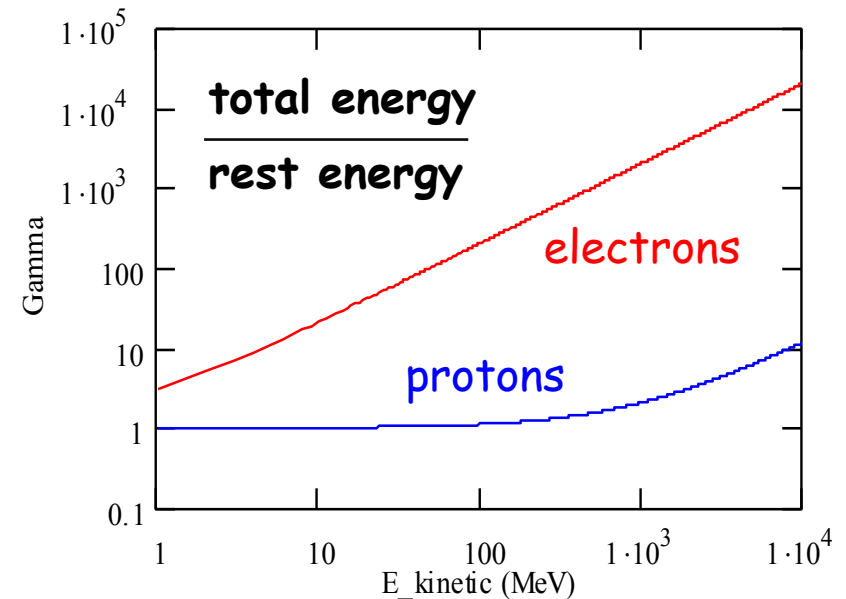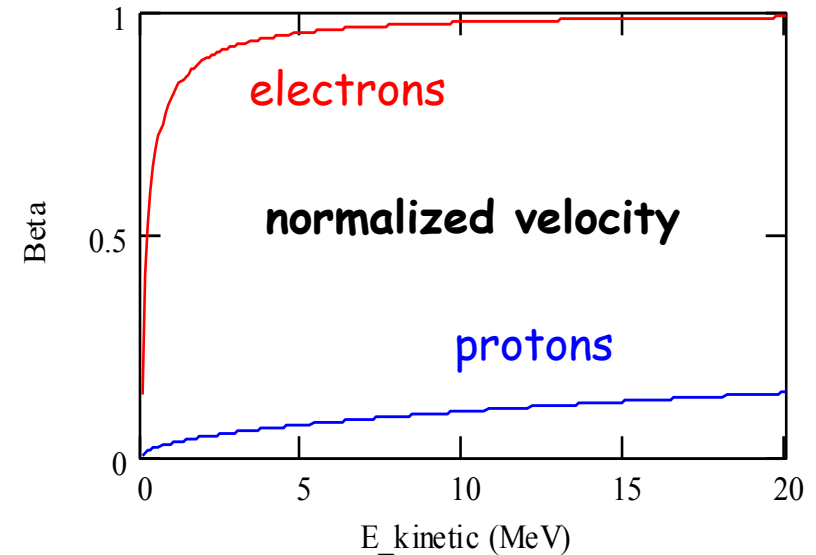

Acceleration: May the force be with you



To accelerate, we need a force in the direction of motion!

Newton-Lorentz Force on a charged particle: $\vec{F} = \frac{d\vec{p}}{dt} = e \left(\vec{E} + \vec{v} \times \vec{B} \right)$ 2nd term always perpendicular to motion => **no acceleration**

Hence, it is necessary to have an **electric field E** (preferably) **along the direction of the initial momentum (z)**, which changes the momentum of the particle.

$$\frac{dp}{dt} = eE_z$$

The 2nd term - larger at high velocities - is used for:

- **BENDING**: generated by a magnetic field perpendicular to the plane of the particle trajectory. The bending radius ρ obeys to the relation :

$$\frac{p}{e} = B\rho$$

in practical units: $B \rho [\text{Tm}] \approx \frac{p [\text{GeV}/c]}{0.3}$

- **FOCUSING**: the bending effect is used to bring the particles trajectory closer to the axis, hence to increase the beam density.

Energy Gain

The acceleration increases the **momentum**, providing **kinetic energy** to the charged particles.

In relativistic dynamics, total **energy** E and **momentum** p are **linked by**

$$E^2 = E_0^2 + p^2 c^2 \quad (E = E_0 + W) \quad W \text{ kinetic energy}$$

Hence: $dE = v dp$ $(2E dE = 2c^2 p dp \Leftrightarrow dE = c^2 mv / E dp = v dp)$

The rate of **energy gain per unit length** of acceleration (along z) is then:

$$\frac{dE}{dz} = v \frac{dp}{dz} = \frac{dp}{dt} = eE_z$$

and the kinetic **energy gained** from the field along the z path is:

$$dW = dE = eE_z dz \quad \rightarrow \quad W = e \int E_z dz = eV$$

where V is just a potential.

Unit of Energy

Today's accelerators and future projects work/aim at the **TeV energy** range.

LHC: 7 TeV -> 14 TeV

CLIC: 3 TeV

HE/VHE-LHC: 33/100 TeV

In fact, this energy unit comes from acceleration:

1 eV (electron Volt) is the energy that 1 elementary charge e (like one electron or proton) gains when it is accelerated in a potential (voltage) difference of 1 Volt.

Basic Unit: eV (electron Volt)


keV = 1000 eV = 10^3 eV

MeV = 10^6 eV

GeV = 10^9 eV

TeV = 10^{12} eV


LHC = ~450 Million km of batteries!!!
3x distance Earth-Sun

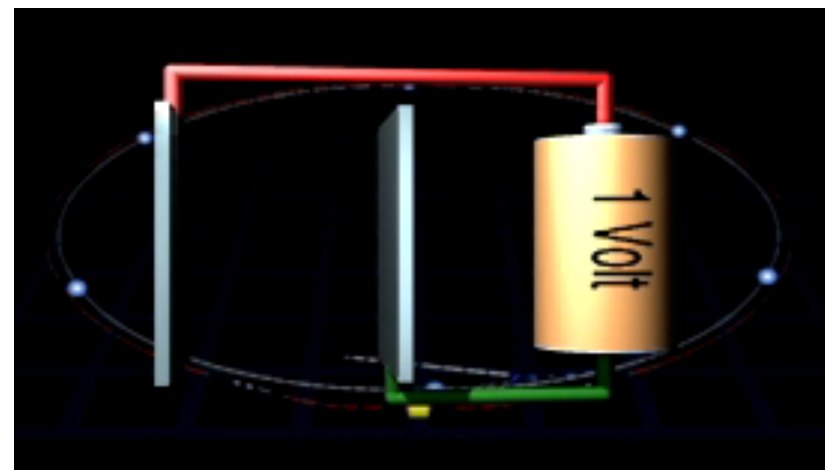

Methods of Acceleration: Time varying fields

Electrostatic field is limited by insulation problems,
the magnetic field does not accelerate at all.

Circular machine: DC acceleration impossible since $\oint \vec{E} \cdot d\vec{s} = 0$

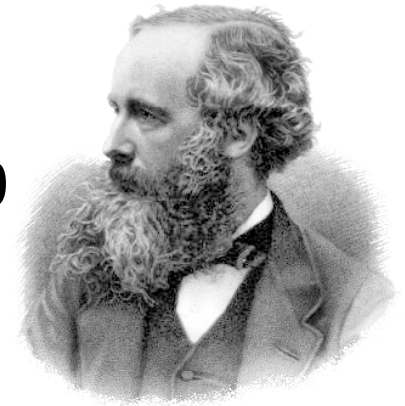

From Maxwell's Equations:

$$\vec{E} = -\vec{\nabla}\phi - \frac{\partial \vec{A}}{\partial t} \quad \text{or} \quad \nabla \times \vec{E} = -\frac{\partial \vec{B}}{\partial t}$$
$$\vec{B} = \mu \vec{H} = \vec{\nabla} \times \vec{A}$$

The electric field is derived from a scalar potential ϕ and a vector potential A
The **time variation** of the **magnetic field** H **generates** an **electric field** E

The solution: => time varying electric fields

- Induction
- RF frequency fields

$$\oint \vec{E} \cdot d\vec{s} = - \iint \frac{\partial \vec{B}}{\partial t} \cdot d\vec{A}$$

Acceleration by Induction: The Betatron


It is based on the principle of a transformer:

- primary side: large electromagnet
- secondary side: electron beam.


The ramping magnetic field is used to guide particles on a circular trajectory as well as for acceleration.

Limited by saturation in iron (~300 MeV e-)

Used in industry and medicine, as they are compact accelerators for electrons

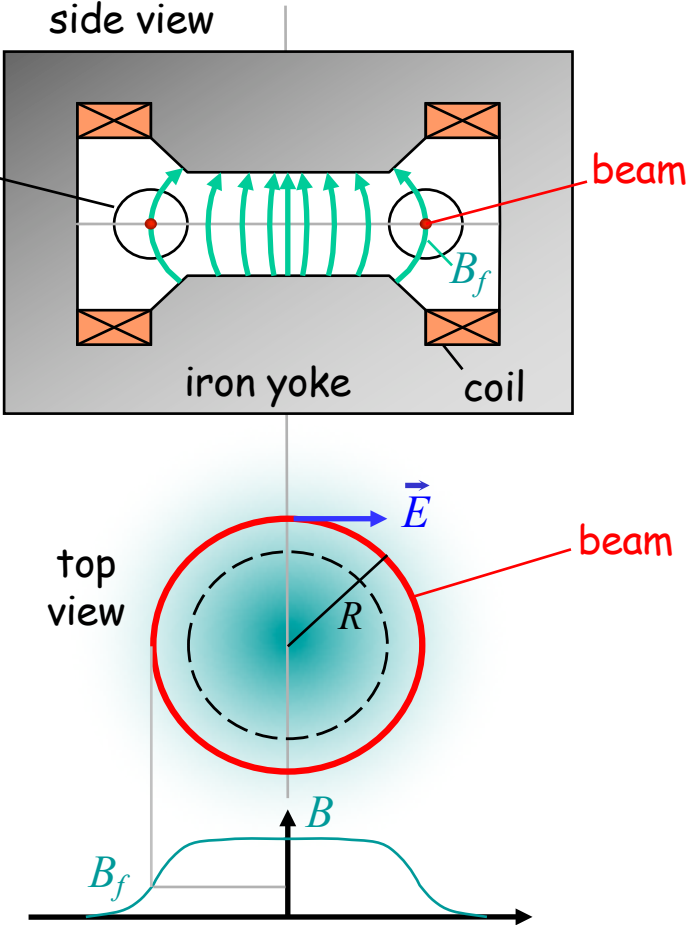

Donald Kerst with the first betatron, invented at the University of Illinois in 1940

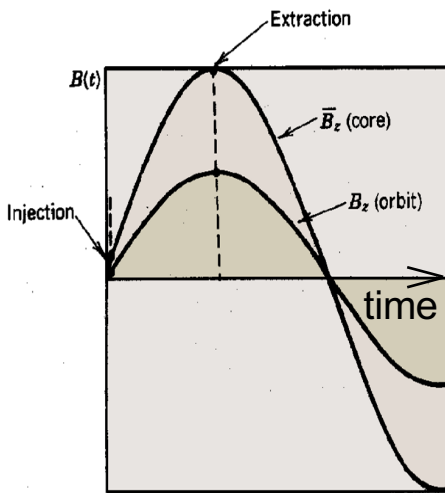

Summary: Relativity + Energy Gain

Newton-Lorentz Force $\vec{F} = \frac{d\vec{p}}{dt} = e \left(\vec{E} + \vec{v} \times \vec{B} \right)$ 2nd term always perpendicular to motion \Rightarrow no acceleration

Relativistic Dynamics

$$\beta = \frac{v}{c} = \sqrt{1 - \frac{1}{\gamma^2}} \quad \gamma = \frac{E}{E_0} = \frac{m}{m_0} = \frac{1}{\sqrt{1 - \beta^2}}$$

$$p = mv = \frac{E}{c^2} \beta c = \beta \frac{E}{c} = \beta \gamma m_0 c$$

$$E^2 = E_0^2 + p^2 c^2 \quad \longrightarrow \quad dE = v dp$$

$$\frac{dE}{dz} = v \frac{dp}{dz} = \frac{dp}{dt} = e E_z$$

$$dE = dW = e E_z dz \quad \rightarrow \quad W = e \int E_z dz$$

RF Acceleration

$$E_z = \hat{E}_z \sin \omega_{RF} t = \hat{E}_z \sin \phi(t)$$

$$\int \hat{E}_z dz = \hat{V}$$

$$W = e \hat{V} \sin \phi$$


(neglecting transit time factor)

The field will change during the passage of the particle through the cavity
 \Rightarrow effective energy gain is lower


Common Phase Conventions

1. For **circular accelerators**, the origin of time is taken at the **zero crossing** of the RF voltage with positive slope
2. For **linear accelerators**, the origin of time is taken at the positive **crest** of the RF voltage

Time $t = 0$ chosen such that:

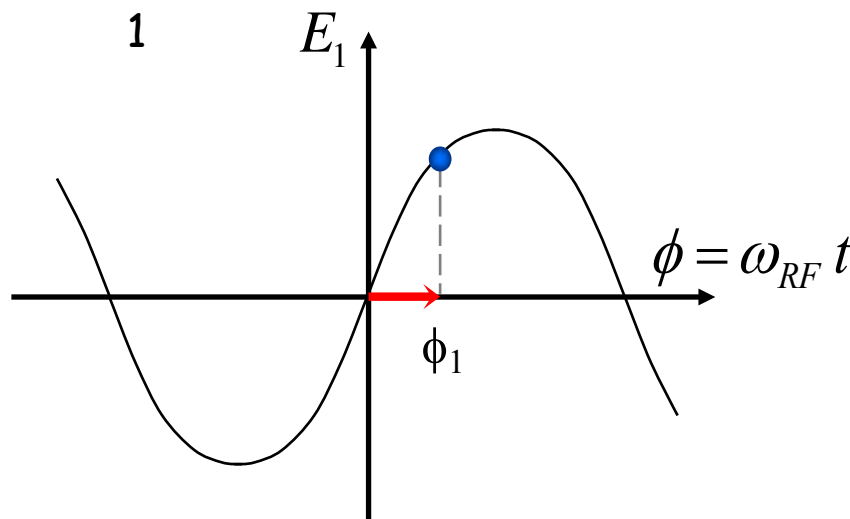

$$E_1(t) = E_0 \sin(\omega_{RF} t)$$

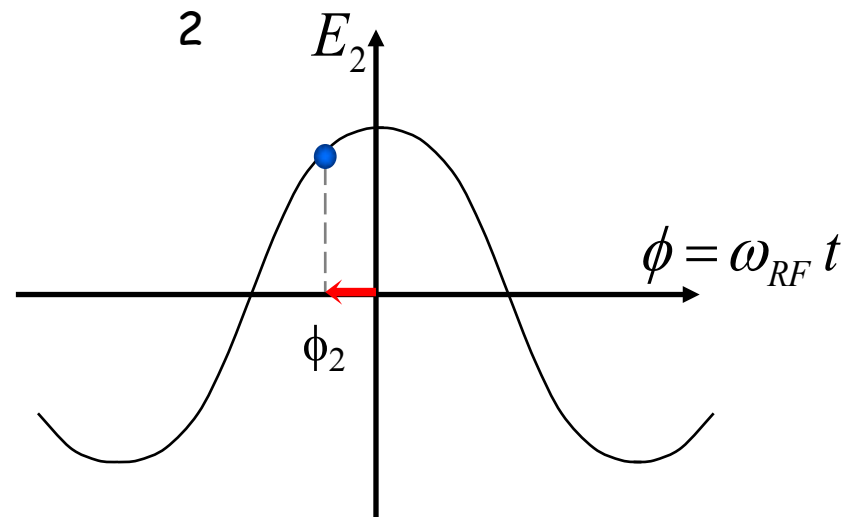


$$E_2(t) = E_0 \cos(\omega_{RF} t)$$


3. I will stick to **convention 1** in the following to avoid confusion

Longitudinal phase space

The **energy - phase oscillations** can be drawn in **phase space**:

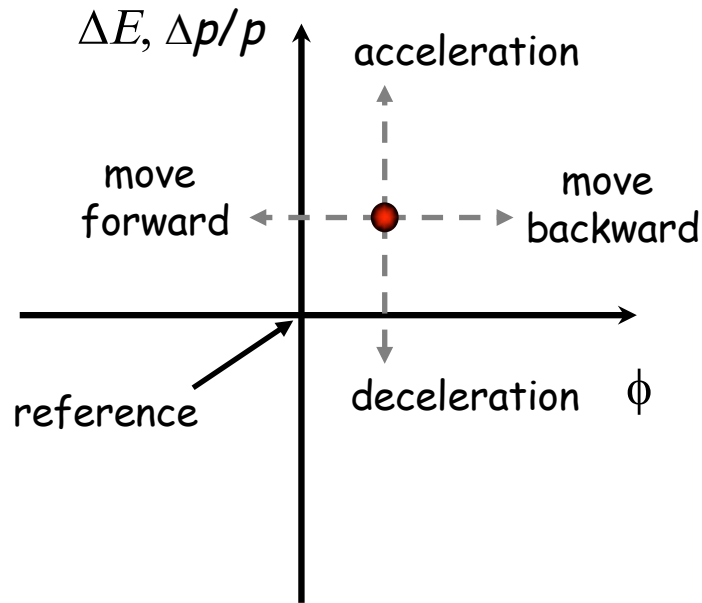

The particle trajectory in the phase space ($\Delta p/p, \phi$) describes its longitudinal motion.

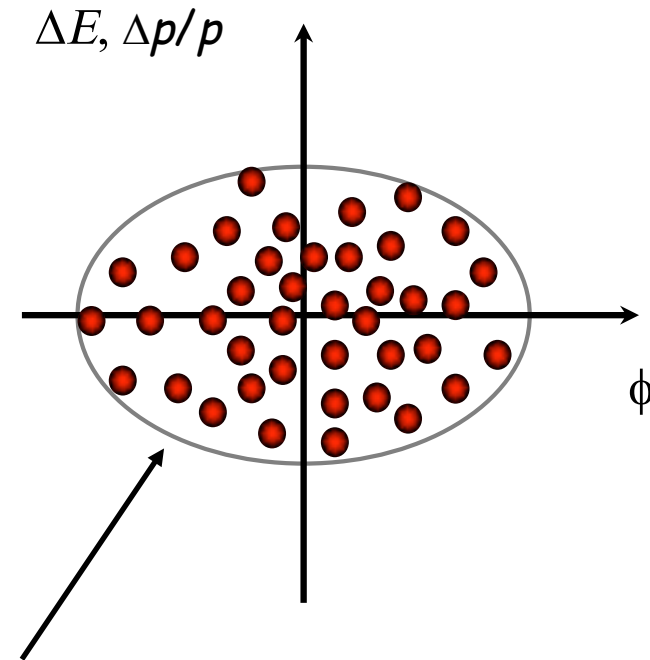

Emittance: phase space area including all the particles

NB: if the emittance contour correspond to a possible orbit in phase space, its shape does not change with time (matched beam)


Circular accelerators

Cyclotron
Synchrotron

Circular accelerators: Cyclotron



Circular accelerators: Cyclotron

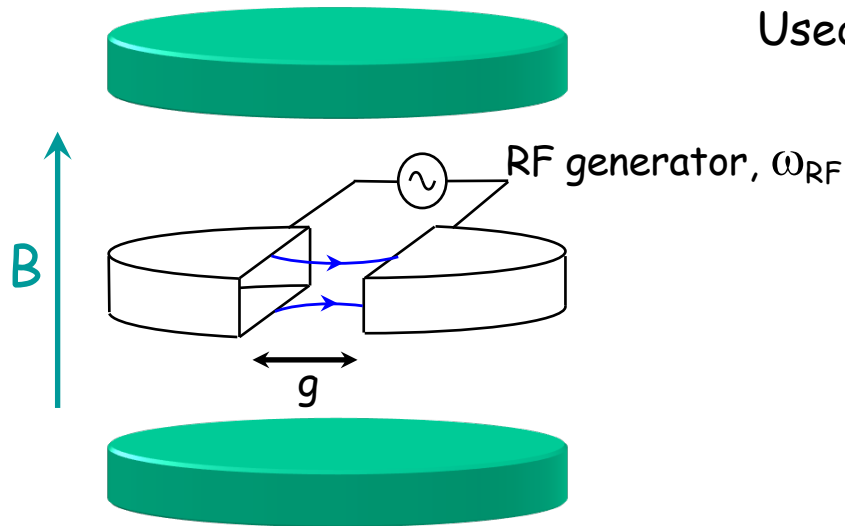

Used for protons, ions

$B = \text{constant}$


$\omega_{RF} = \text{constant}$

Synchronism condition



$$\omega_s = \omega_{RF}$$

$$2\pi \rho = v_s T_{RF}$$

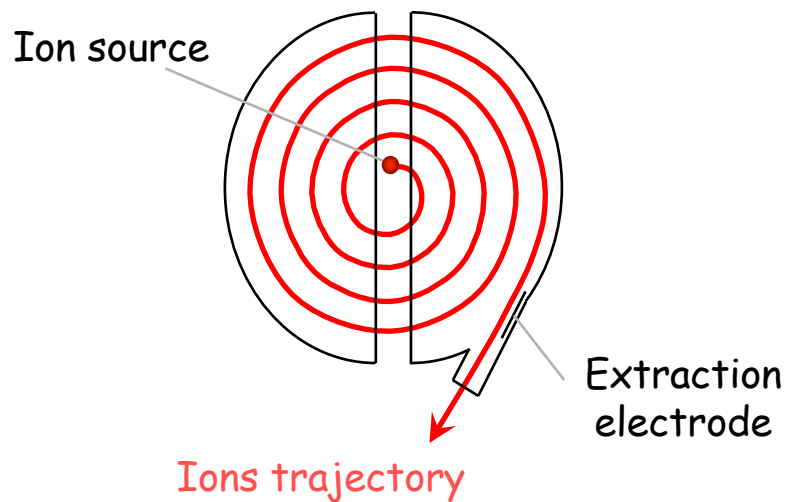

Cyclotron frequency $\omega = \frac{q B}{m_0 \gamma}$

1. γ increases with the energy
 \Rightarrow no exact synchronism
2. if $v \ll c \Rightarrow \gamma \cong 1$

Cyclotron Animation

Animation: http://www.sciences.univ-nantes.fr/sites/genevieve_tulloue/Meca/Charges/cyclotron.html

Circular accelerators: Cyclotron



Cyclotron / Synchrocyclotron



TRIUMF 520 MeV cyclotron

Vancouver - Canada



CERN 600 MeV synchrocyclotron

Synchrocyclotron: Same as cyclotron, except a modulation of ω_{RF}

B = constant

$\gamma \omega_{RF}$ = constant


ω_{RF} decreases with time

The condition:

$$\omega_s(t) = \omega_{RF}(t) = \frac{q B}{m_0 \gamma(t)}$$

Allows to go beyond the non-relativistic energies

Circular accelerators: The Synchrotron

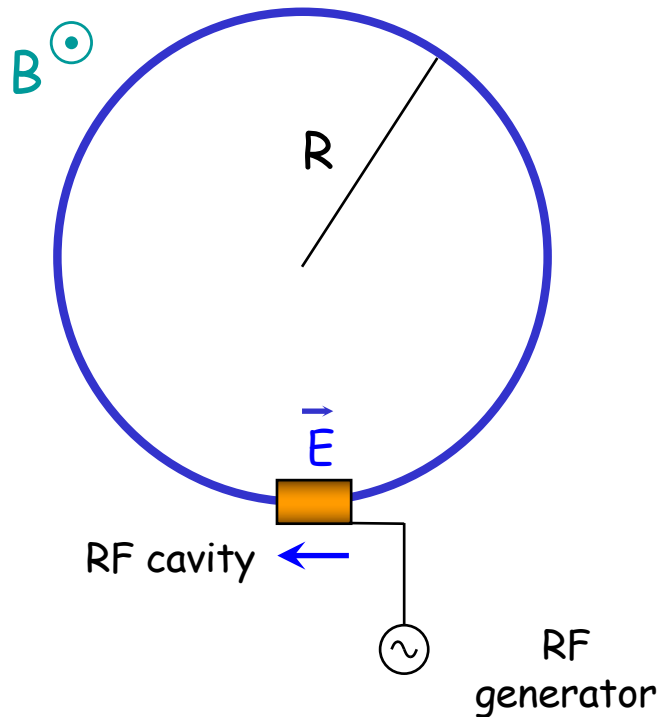

1. **Constant orbit** during acceleration
2. To keep particles on the closed orbit, **B should increase** with time
3. ω and ω_{RF} **increase** with energy

RF frequency can be multiple of revolution frequency

$$\omega_{RF} = h\omega$$

Synchronism condition





$$T_s = h T_{RF}$$

$$\frac{2\pi R}{v_s} = h T_{RF}$$


h integer,
harmonic number:
 number of RF cycles
 per revolution

Circular accelerators: The Synchrotron

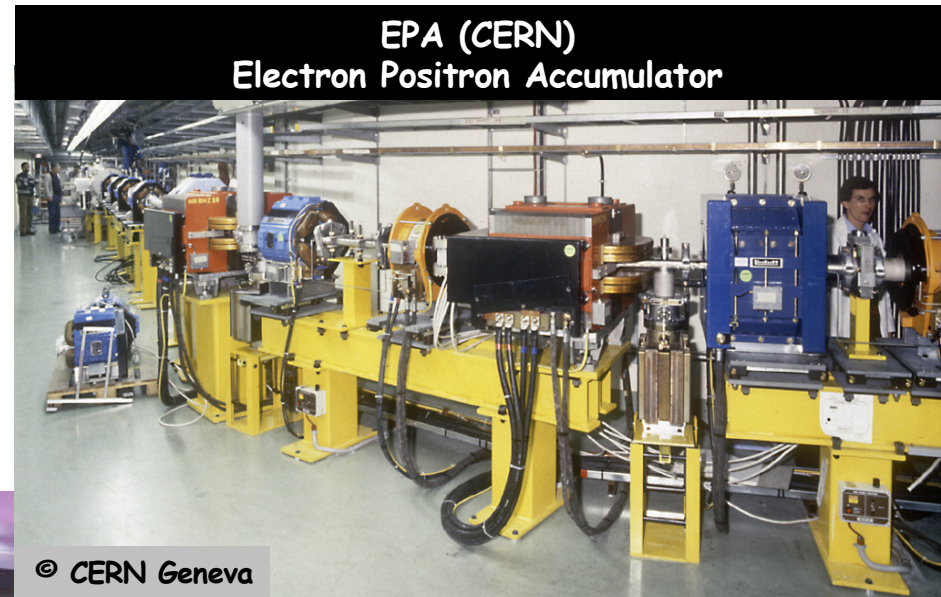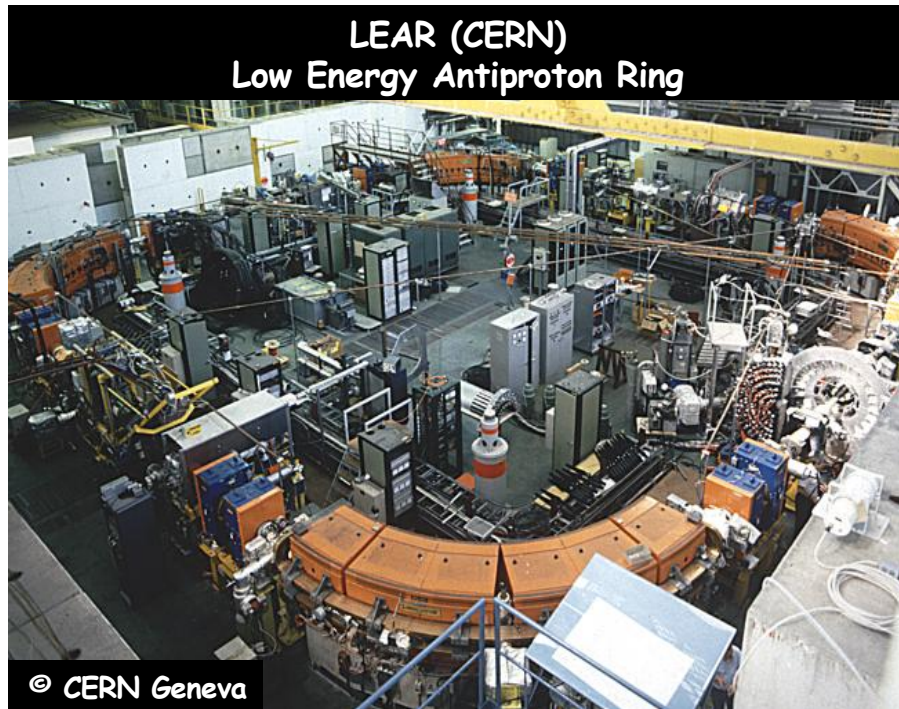


Examples of different
proton and electron
synchrotrons at CERN

+ LHC (of course!)

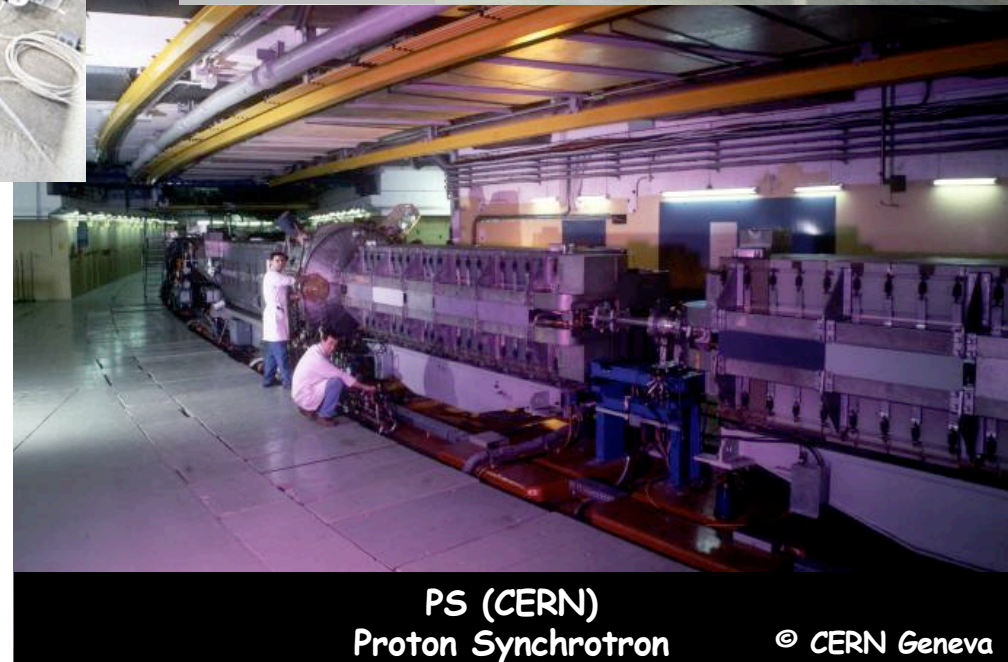

The Synchrotron

The **synchrotron** is a synchronous accelerator since there is a **synchronous RF phase** for which the energy gain **fits** the **increase of the magnetic field** at each turn. That implies the following operating conditions:

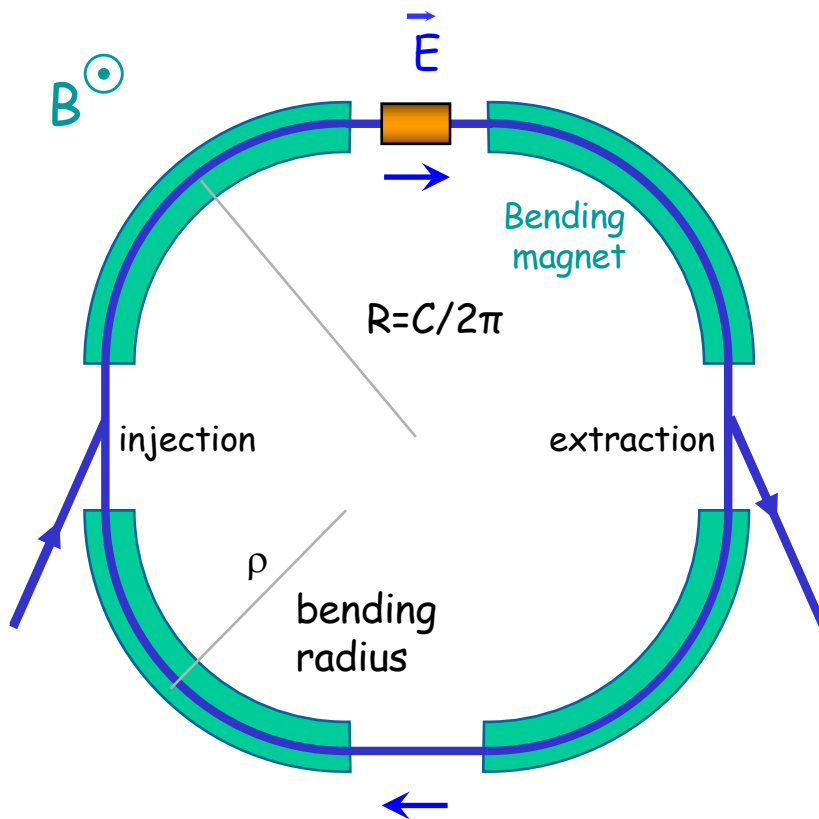

$$e\hat{V} \sin \phi \longrightarrow \text{Energy gain per turn}$$

$$\phi = \phi_s = cte \longrightarrow \text{Synchronous particle}$$

$$\omega_{RF} = h\omega \longrightarrow \text{RF synchronism (h - harmonic number)}$$


$$\rho = cte \quad R = cte \longrightarrow \text{Constant orbit}$$

$$B\rho = P/e \Rightarrow B \longrightarrow \text{Variable magnetic field}$$

If $v \approx c$, ω hence ω_{RF} remain constant (ultra-relativistic e^-)

The Synchrotron - LHC Operation Cycle

The magnetic **field** (dipole current) is **increased during the acceleration**.

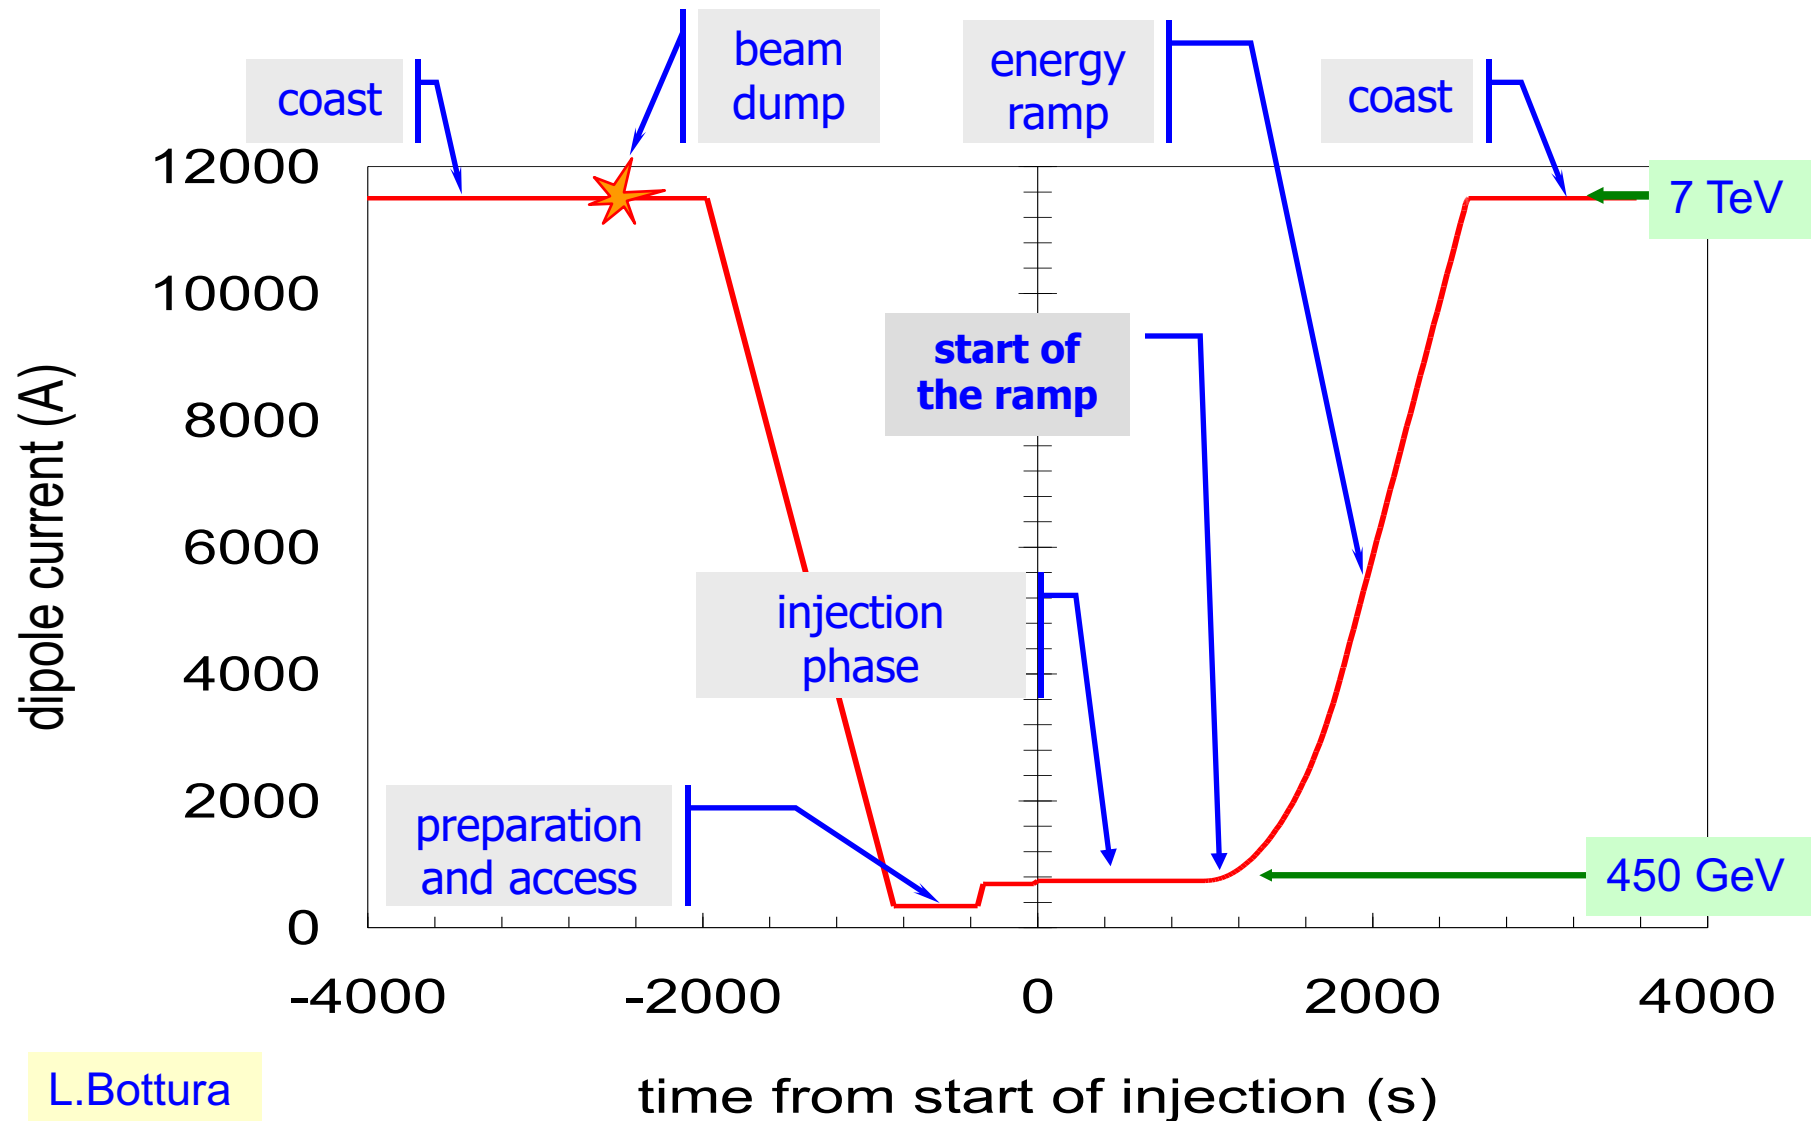

L.Bottura

The Synchrotron - Energy ramping

Energy ramping by increasing the B field (frequency has to follow v):

$$p = eB\rho \quad \Rightarrow \quad \frac{dp}{dt} = e\rho \dot{B} \quad \Rightarrow \quad (\Delta p)_{turn} = e\rho \dot{B} T_r = \frac{2\pi e\rho R\dot{B}}{v}$$

Since: $E^2 = E_0^2 + p^2 c^2 \quad \Rightarrow \quad \Delta E = v\Delta p$

$$(\Delta E)_{turn} = (\Delta W)_s = 2\pi e\rho R\dot{B} = e\hat{V} \sin\phi_s$$

Stable phase ϕ_s changes during energy ramping

$$\sin \phi_s = 2\pi \rho R \frac{\dot{B}}{\hat{V}_{RF}} \quad \Rightarrow \quad \phi_s = \arcsin\left(2\pi \rho R \frac{\dot{B}}{\hat{V}_{RF}}\right)$$

- The number of **stable synchronous particles** is equal to the **harmonic number h** . They are equally spaced along the circumference.
- Each synchronous particle satisfies the relation $p=eB\rho$. They have the nominal energy and follow the nominal trajectory.

The Synchrotron - Frequency change

During the energy ramping, **the RF frequency increases** to follow the increase of the revolution frequency :

$$\omega = \frac{\omega_{RF}}{h} = \omega(B, R_s)$$


Hence:
$$\frac{f_{RF}(t)}{h} = \frac{v(t)}{2\pi R_s} = \frac{1}{2\pi} \frac{ec^2}{E_s(t)} \frac{\rho}{R_s} B(t) \quad \left(\text{using } p(t) = eB(t)\rho, \quad E = mc^2 \right)$$

Since $E^2 = (m_0c^2)^2 + p^2c^2$ the RF frequency must follow the variation of the B field with the law

$$\frac{f_{RF}(t)}{h} = \frac{c}{2\pi R_s} \left\{ \frac{B(t)^2}{(m_0c^2 / e\rho)^2 + B(t)^2} \right\}^{1/2}$$

This asymptotically tends towards $f_r \rightarrow \frac{c}{2\pi R_s}$ when B becomes large compared to $m_0c^2 / (e\rho)$ which corresponds to $v \rightarrow c$

Dispersion Effects in a Synchrotron

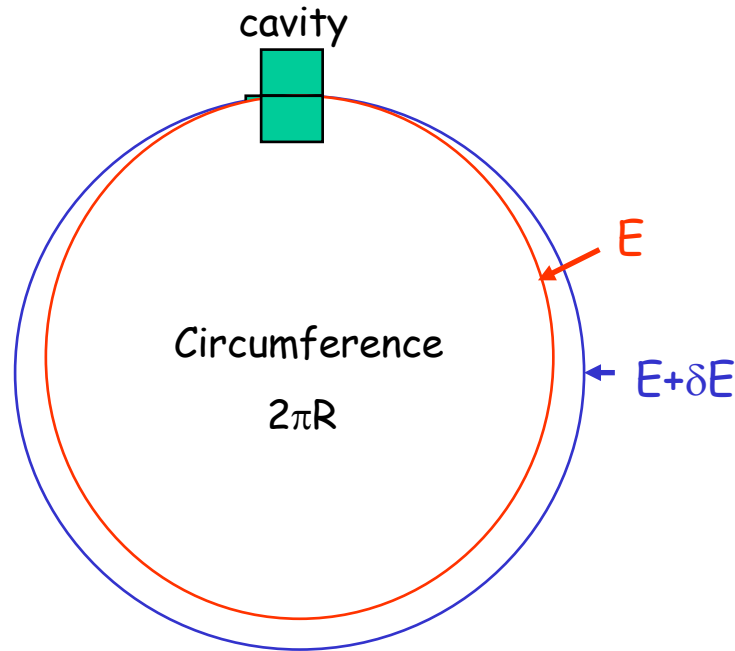

If a particle is slightly shifted in momentum it will have a different orbit and the orbit length is different.

The "momentum compaction factor" is defined as:

$$\alpha_c = \frac{dL/L}{dp/p} \quad \alpha_c = \frac{p}{L} \frac{dL}{dp}$$

If the particle is shifted in momentum it will have also a different velocity. As a result of both effects the revolution frequency changes:

$$\eta = \frac{df_r/f_r}{dp/p} \Rightarrow \eta = \frac{p}{f_r} \frac{df_r}{dp}$$


p =particle momentum
 R =synchrotron physical radius
 f_r =revolution frequency

Momentum Compaction Factor

$$\alpha_c = \frac{p}{L} \frac{dL}{dp}$$

$$ds_0 = \rho d\theta$$

$$ds = (\rho + x) d\theta$$

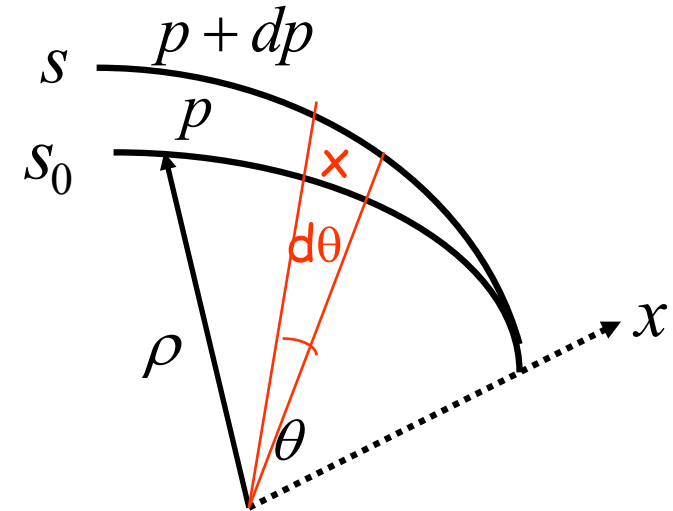

The elementary path difference from the two orbits is:

definition of dispersion D_x

$$\frac{dl}{ds_0} = \frac{ds - ds_0}{ds_0} = \frac{x}{\rho} \stackrel{\text{definition of } D_x}{=} \frac{D_x}{\rho} \frac{dp}{p}$$

leading to the total change in the circumference:

$$dL = \int_C dl = \int \frac{x}{\rho} ds_0 = \int \frac{D_x}{\rho} \frac{dp}{p} ds_0$$

$$\alpha_c = \frac{1}{L} \int_C \frac{D_x(s)}{\rho(s)} ds_0$$

With $\rho = \infty$ in straight sections we get:

$$\alpha_c = \frac{\langle D_x \rangle_m}{R}$$

$\langle \rangle_m$ means that the average is considered over the bending magnet only

Dispersion Effects - Revolution Frequency

There are **two effects** changing the revolution frequency:
the **orbit length** and the **velocity** of the particle

$$f_r = \frac{\beta c}{2\pi R} \quad \Rightarrow \quad \frac{df_r}{f_r} = \frac{d\beta}{\beta} - \frac{dR}{R} \stackrel{\substack{\uparrow \\ \text{definition of momentum} \\ \text{compaction factor}}}{=} \frac{d\beta}{\beta} - \alpha_c \frac{dp}{p}$$

$$p = mv = \beta\gamma \frac{E_0}{c} \quad \Rightarrow \quad \frac{dp}{p} = \frac{d\beta}{\beta} + \frac{d(1 - \beta^2)^{-1/2}}{(1 - \beta^2)^{-1/2}} = \underbrace{(1 - \beta^2)^{-1}}_{\gamma^2} \frac{d\beta}{\beta}$$

$$\frac{df_r}{f_r} = \left(\frac{1}{\gamma^2} - \alpha_c \right) \frac{dp}{p} \quad \xrightarrow{\frac{df_r}{f_r} = \eta \frac{dp}{p}} \quad \eta = \frac{1}{\gamma^2} - \alpha_c$$


$\eta=0$ at the transition energy

$$\gamma_t = \frac{1}{\sqrt{\alpha_c}}$$

RECAP: Principle of Phase Stability (Linac)

Let's consider a succession of accelerating gaps, operating in the 2π mode, for which the synchronism condition is fulfilled for a phase Φ_s .


$eV_s = e\hat{V} \sin \Phi_s$ is the energy gain in one gap for the particle to reach the next gap with the same RF phase: P_1, P_2, \dots are fixed points.

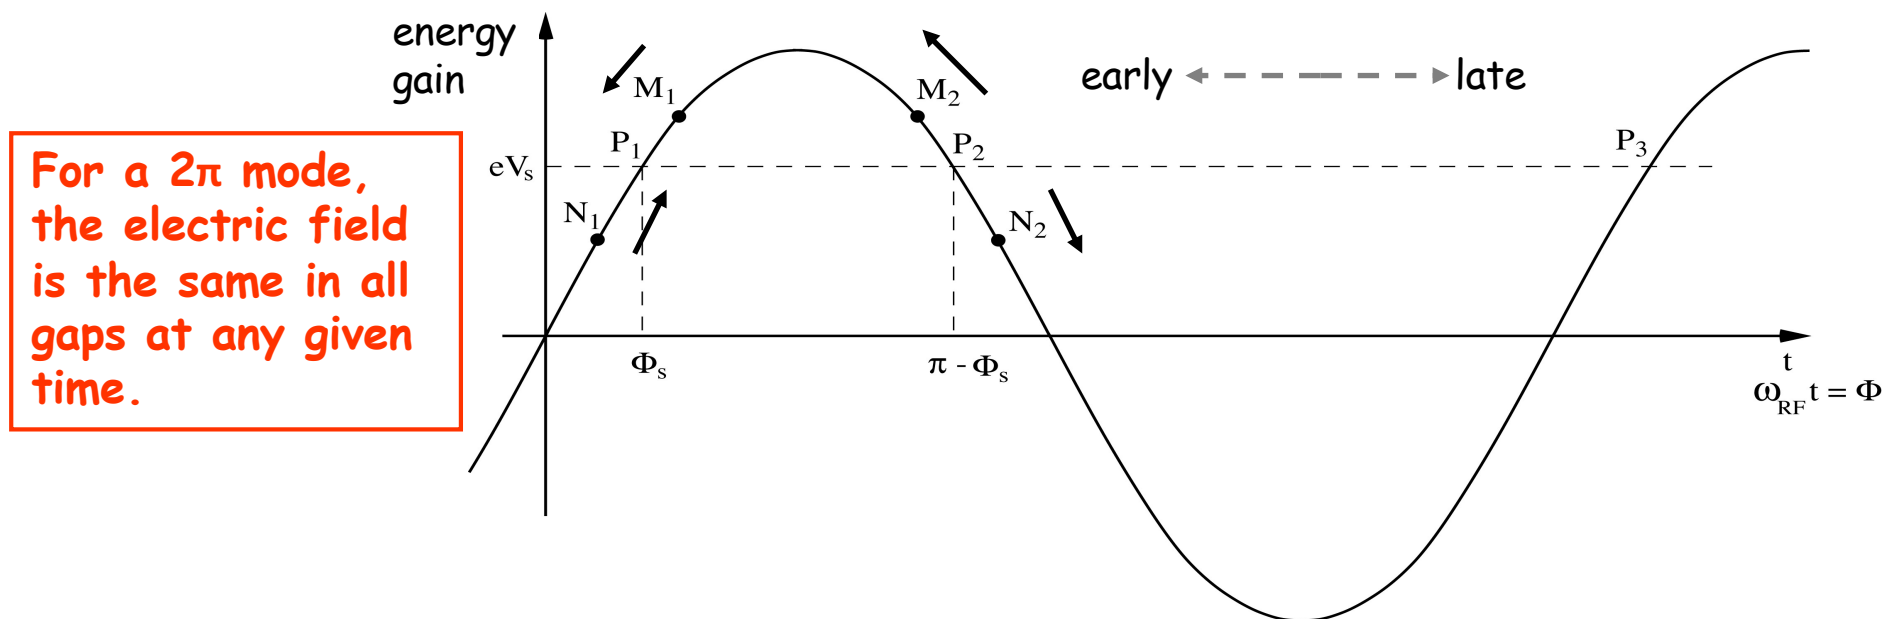

If an **energy increase** is transferred into a **velocity increase** \Rightarrow
 M_1 & N_1 will move towards P_1 \Rightarrow **stable**
 M_2 & N_2 will go away from P_2 \Rightarrow **unstable**
 (Highly relativistic particles have no significant velocity change)

Phase Stability in a Synchrotron

- From the definition of η it is clear that an **increase in momentum** gives
- **below transition** ($\eta > 0$) a **higher revolution frequency** (increase in velocity dominates) while
 - **above transition** ($\eta < 0$) a **lower revolution frequency** ($v \approx c$ and longer path) where the momentum compaction (generally > 0) dominates.

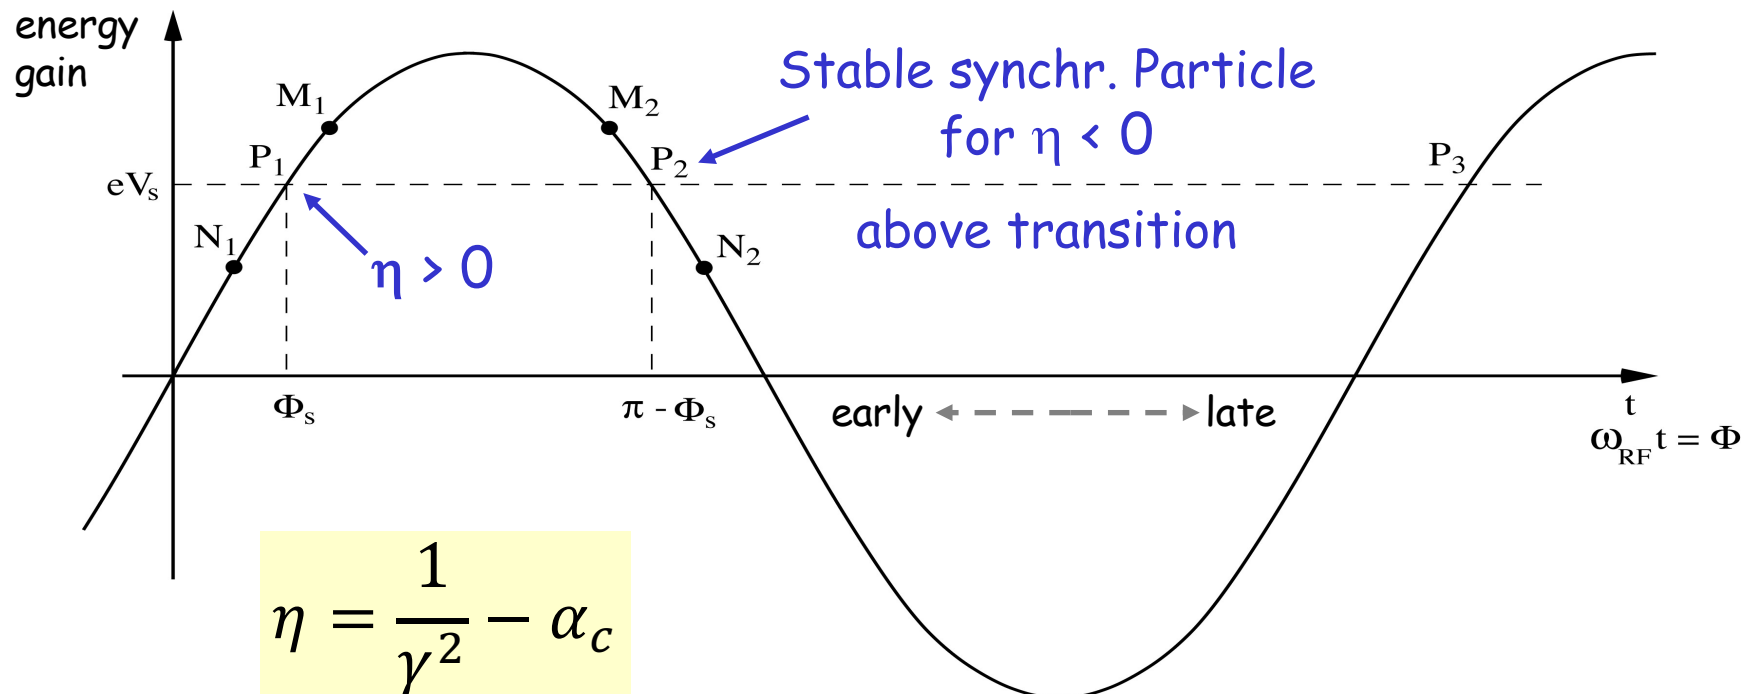


Crossing Transition

At **transition**, the velocity change and the path length change with momentum compensate each other. So the revolution frequency there is independent from the momentum deviation.

Crossing transition during acceleration makes the previous stable synchronous phase unstable. The RF system needs to make a rapid change of the RF phase, a '**phase jump**'.

$$\alpha_c \sim \frac{1}{Q_x^2} \quad \gamma_t = \frac{1}{\sqrt{\alpha_c}} \sim Q_x$$

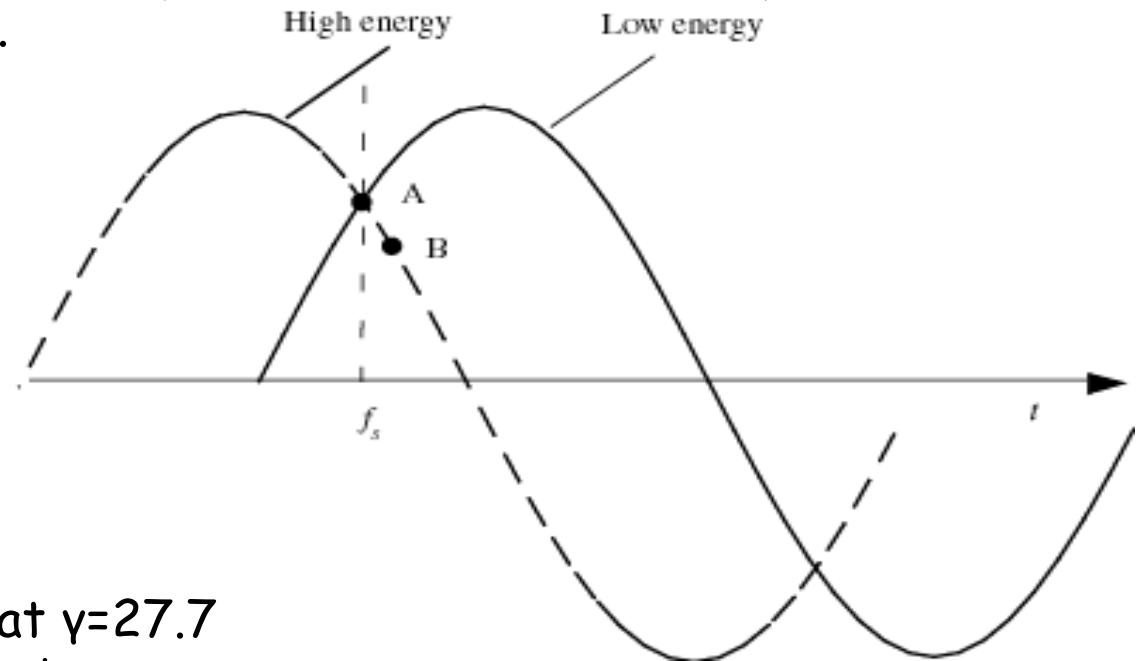

In the PS: γ_t is at ~ 6 GeV

In the SPS: $\gamma_t = 22.8$, injection at $\gamma = 27.7$

=> no transition crossing!

In the LHC: γ_t is at ~ 55 GeV, also far below injection energy


Transition crossing not needed in leptons machines, why?

Dynamics: Synchrotron oscillations

Simple case (no accel.): $B = \text{const.}$, below transition $\gamma < \gamma_t$


The phase of the synchronous particle must therefore be $\phi_0 = 0$.

- Φ_1
- The particle **B** is accelerated
 - Below transition, an energy increase means an increase in revolution frequency
 - The particle arrives earlier - tends toward ϕ_0

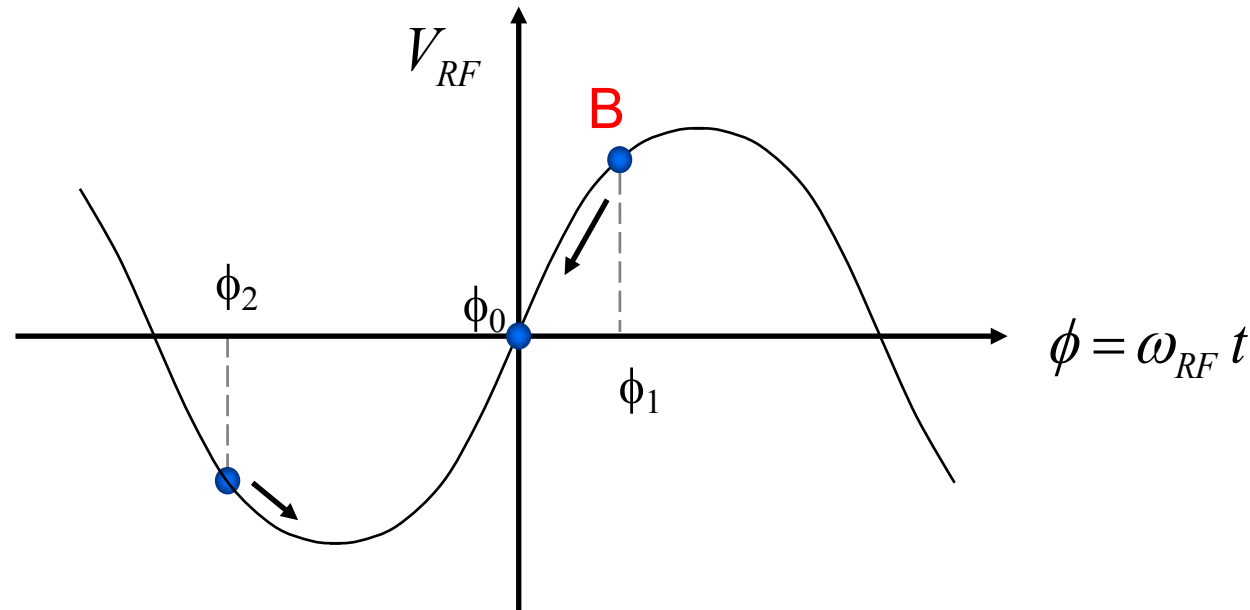


- ϕ_2
- The particle is decelerated
 - decrease in energy - decrease in revolution frequency
 - The particle arrives later - tends toward ϕ_0

Synchrotron oscillations

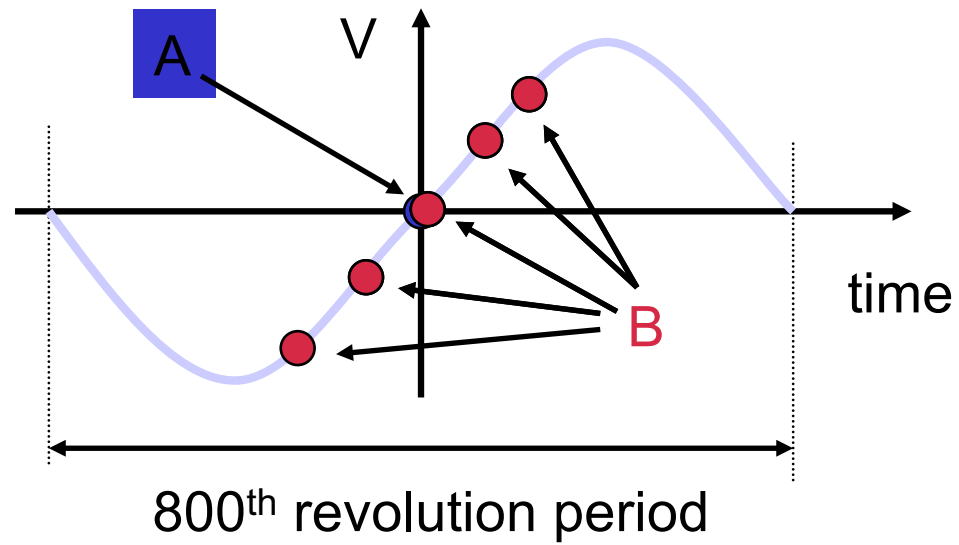

Synchrotron oscillations

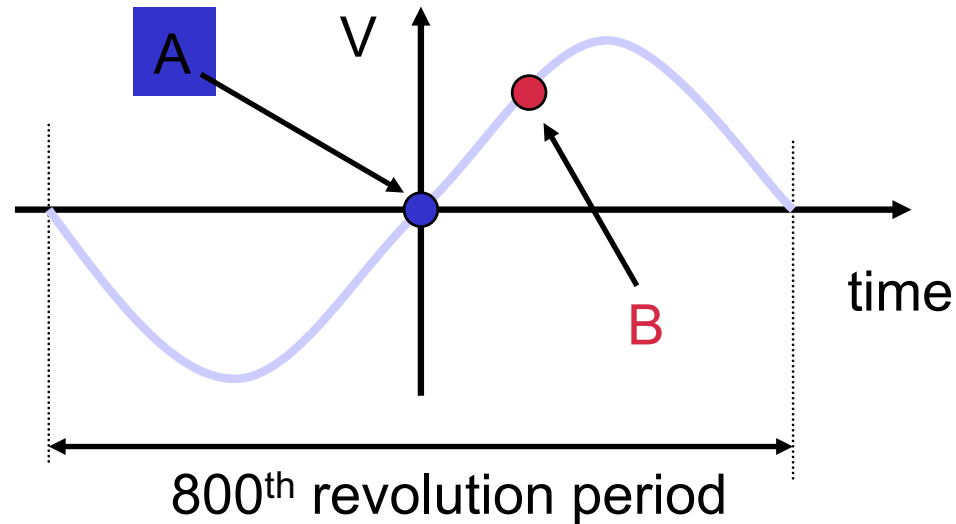

Particle **B** has made one full oscillation around particle A.


The amplitude depends on the initial phase and energy.

Exactly like the pendulum

This oscillation is called:

Synchrotron Oscillation

The Potential Well

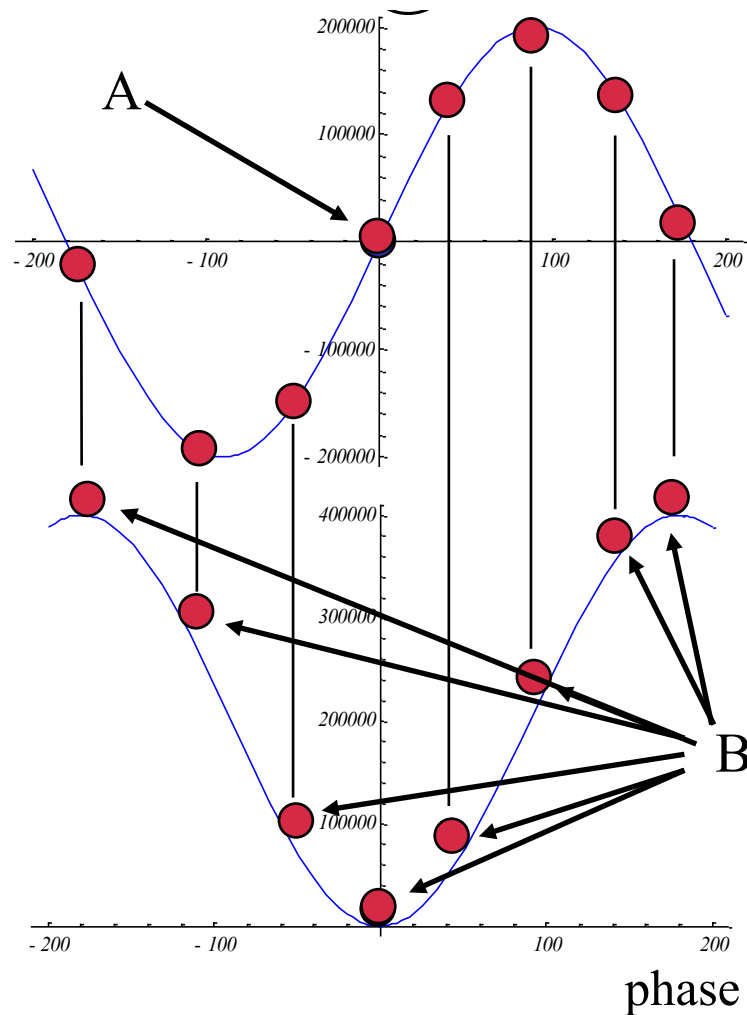

Cavity voltage


Potential well

Longitudinal Phase Space Motion


Particle **B** oscillates around particle **A**

This is a synchrotron oscillation


Plotting this motion in longitudinal phase space gives:

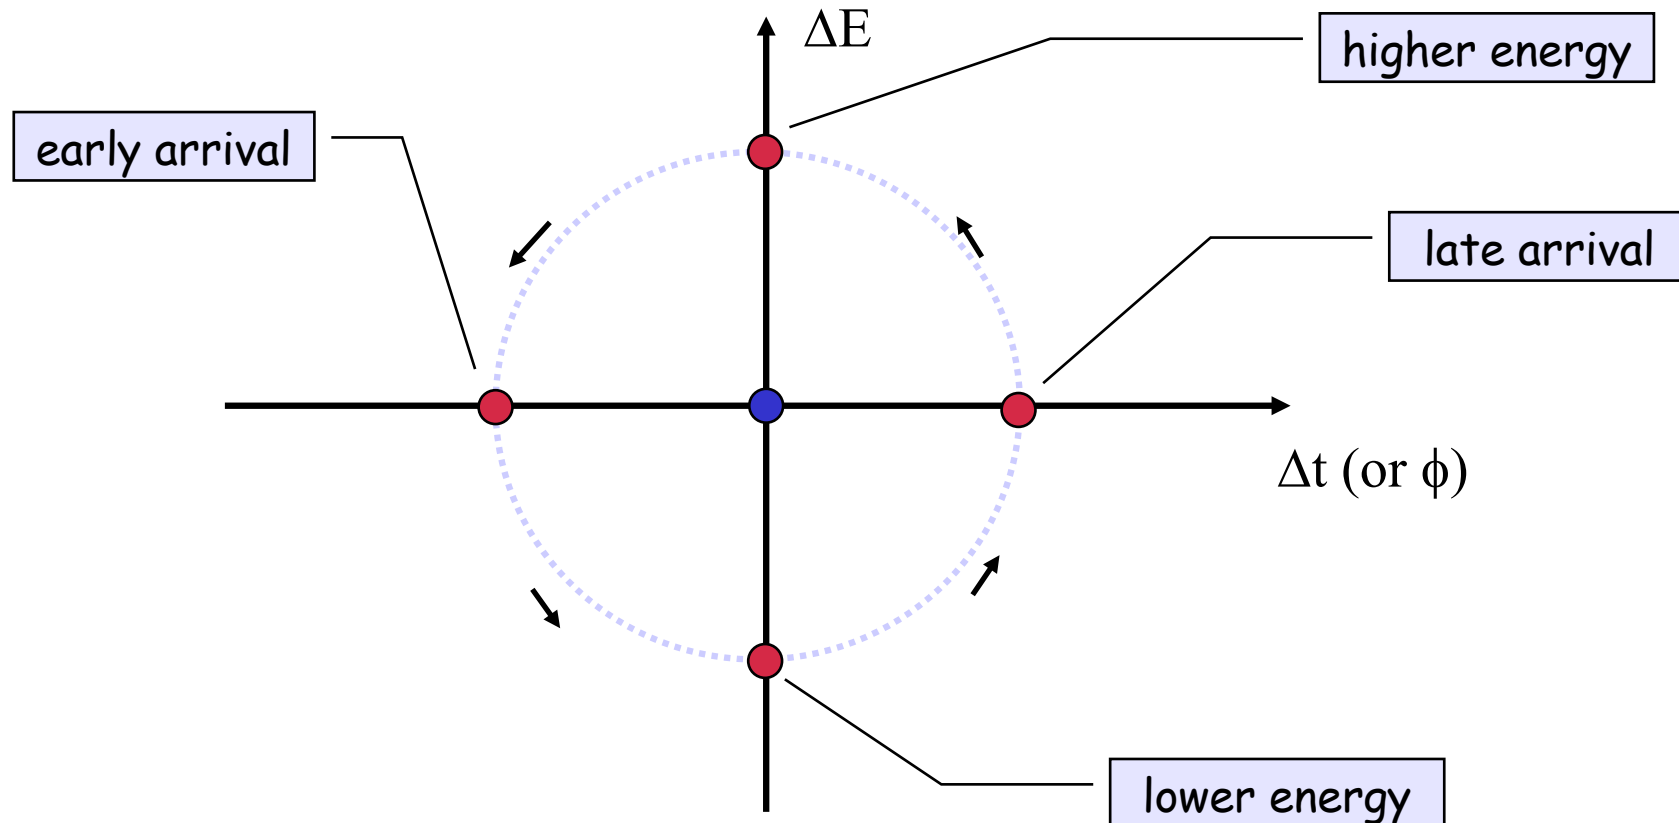

Synchrotron oscillations - No acceleration

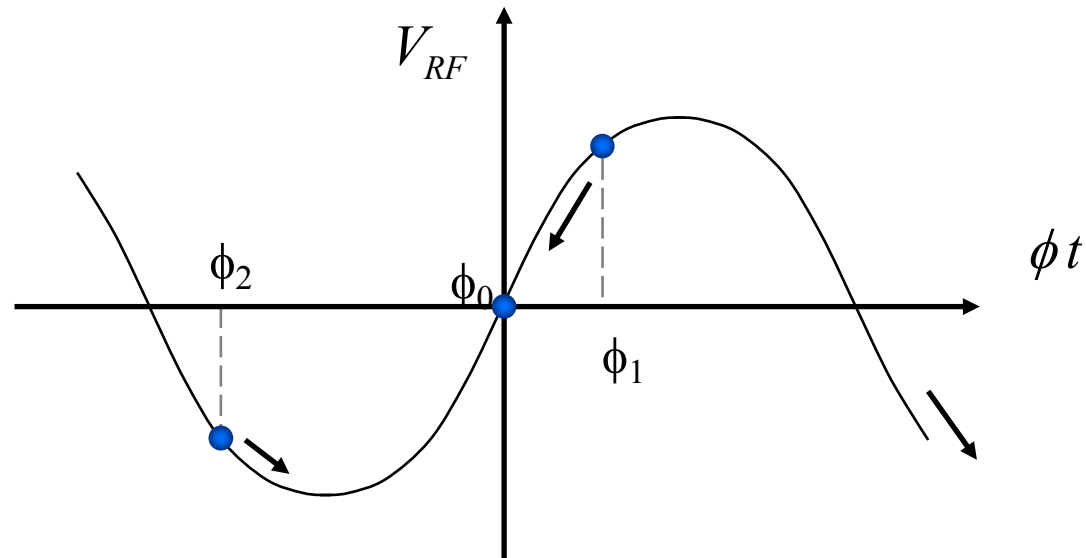


Phase space picture

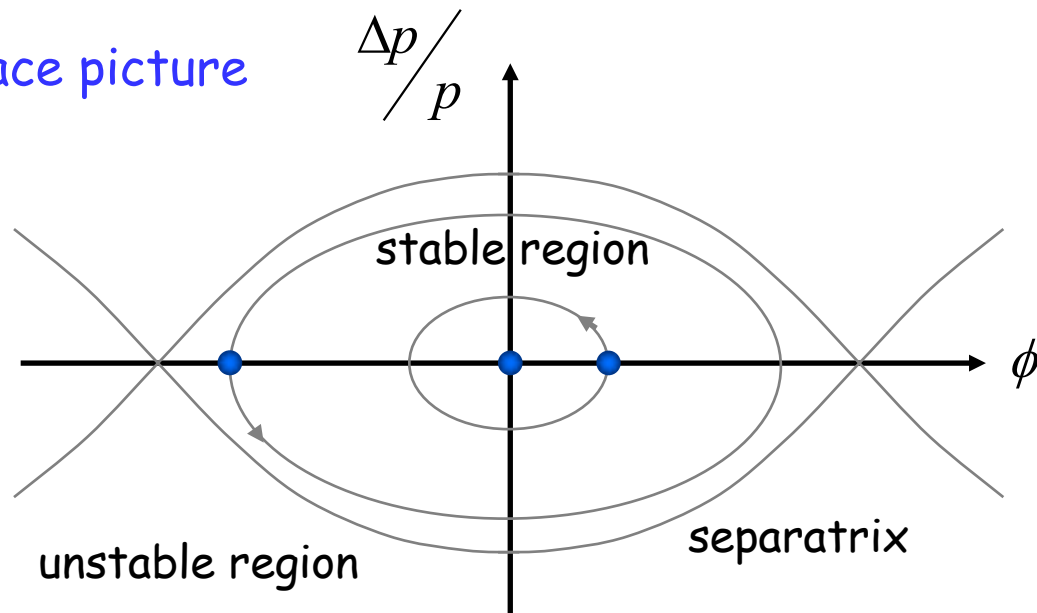


Synchrotron oscillations (with acceleration)

Case with acceleration B increasing

$$\gamma < \gamma_t$$

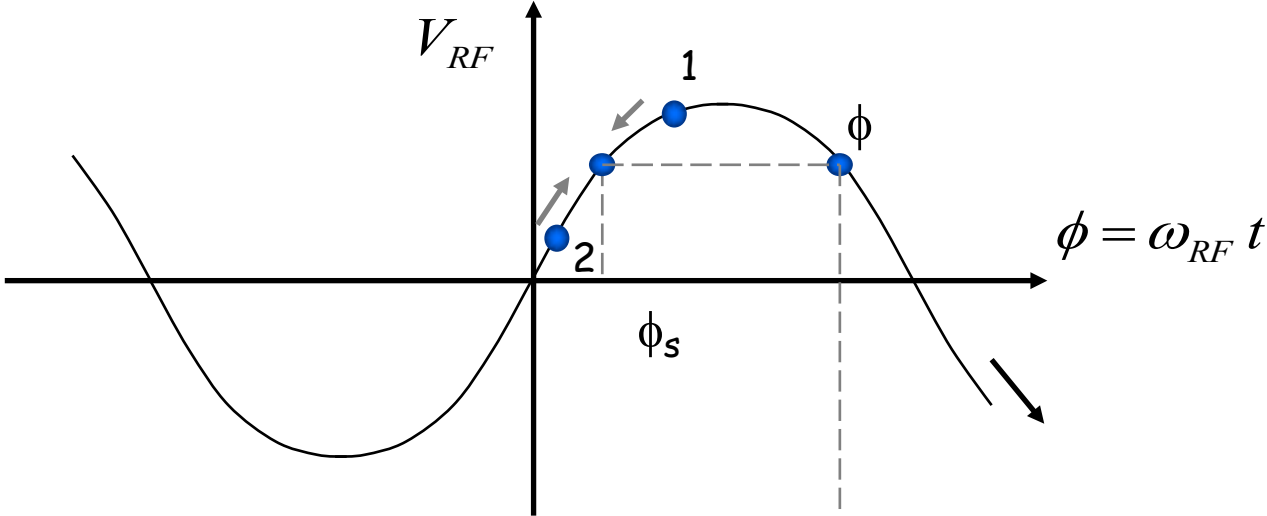

Phase space picture

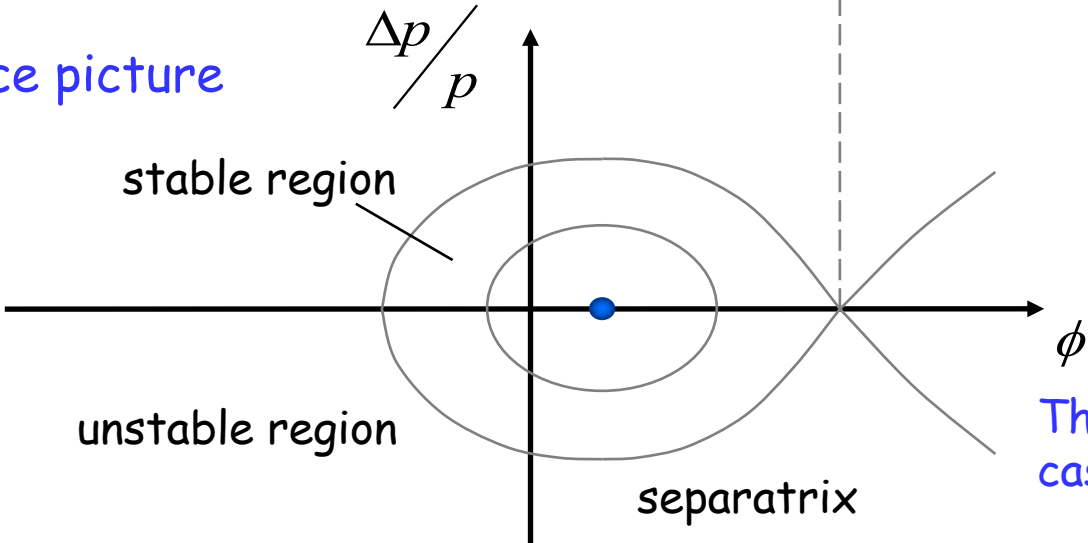


$$\phi_s < \phi < \pi - \phi_s$$

The symmetry of the case $B = \text{const.}$ is lost

Synchrotron motion in phase space


ΔE - ϕ phase space of a **stationary bucket**
(when there is **no acceleration**)

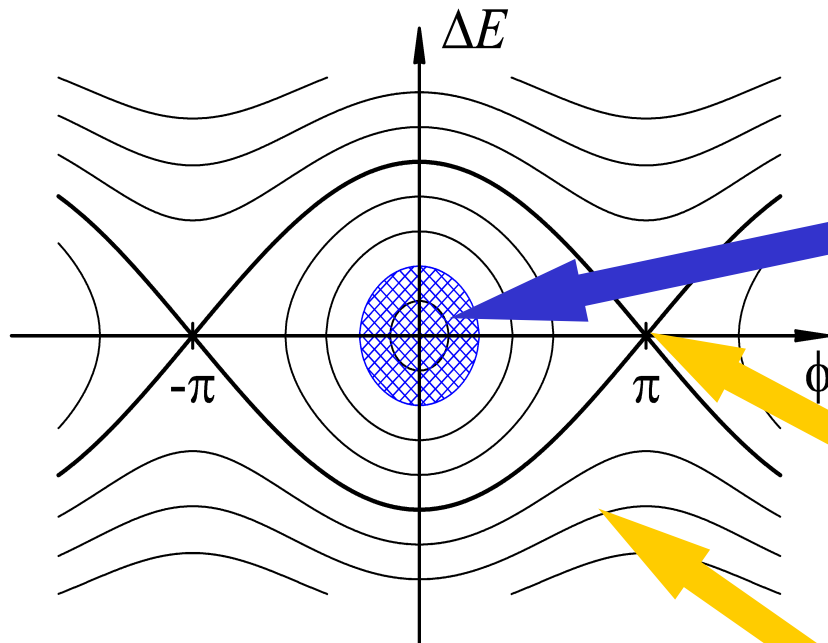

Bucket area: area enclosed by the separatrix
The area covered by particles is the longitudinal emittance

Dynamics of a particle
Non-linear, conservative oscillator → e.g. pendulum


Particle inside the separatrix:



Particle at the unstable fix-point




Particle outside the separatrix:



Synchrotron motion in phase space


The restoring force is **non-linear**.
⇒ speed of motion depends on position in phase-space

(here shown for a stationary bucket)

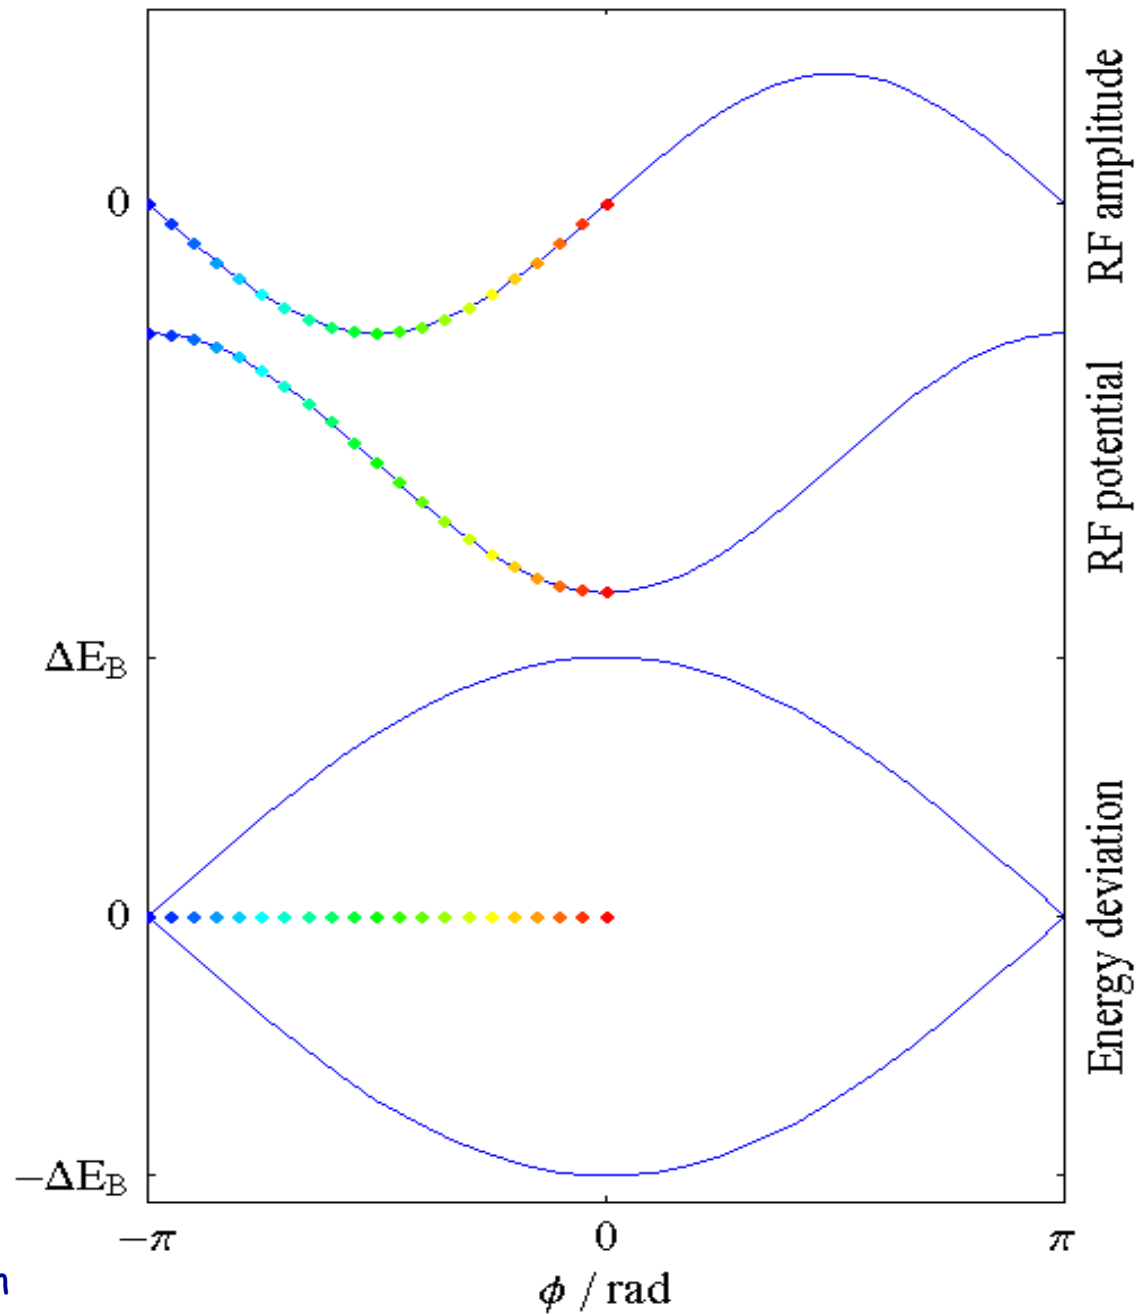

(Stationary) Bunch & Bucket

The **bunches** of the beam **fill** usually **a part of** the **bucket** area.

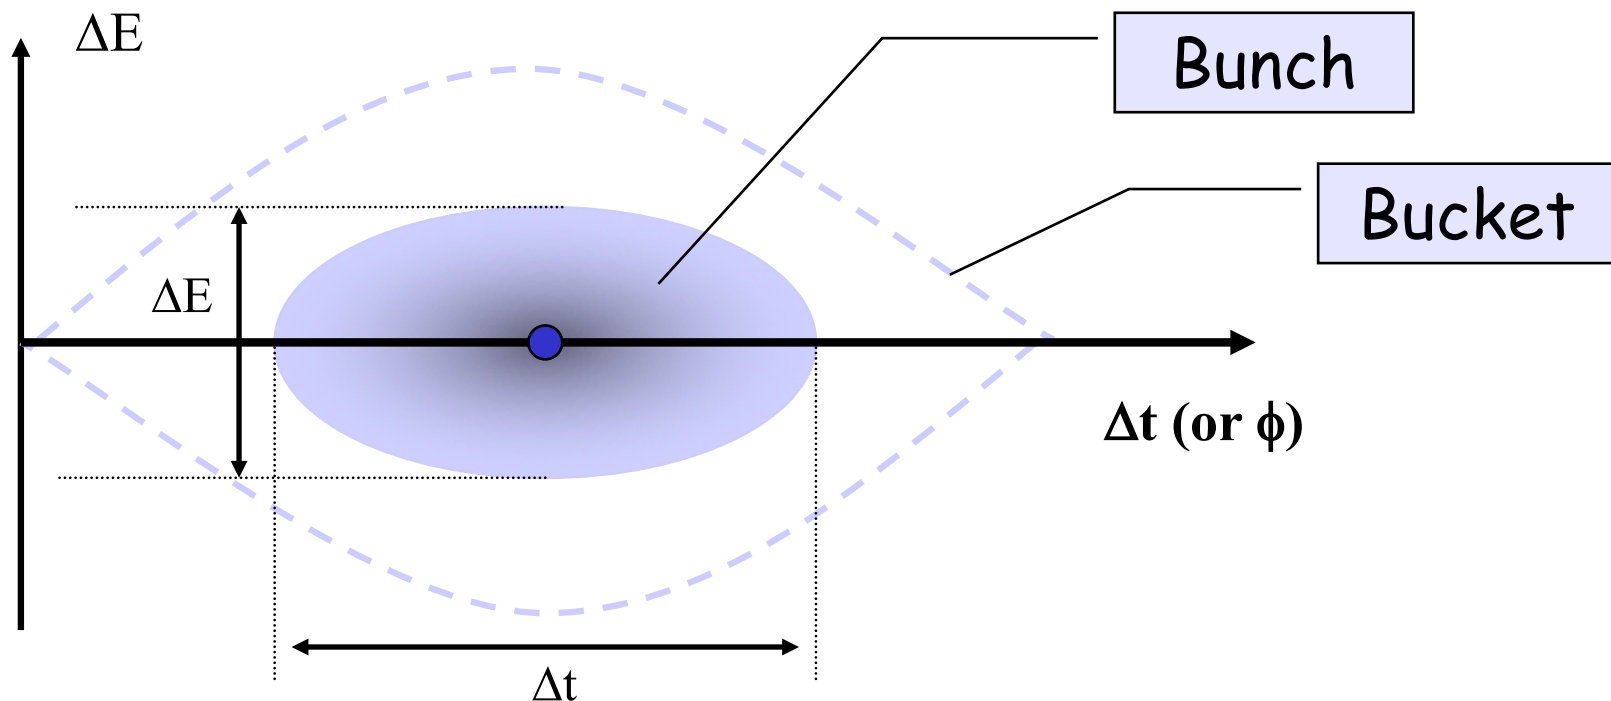


Bucket area = longitudinal Acceptance [eVs]

Bunch area = longitudinal beam emittance = $4\pi \sigma_E \sigma_t$ [eVs]

Attention: Different definitions are used!

RF Acceptance versus Synchronous Phase

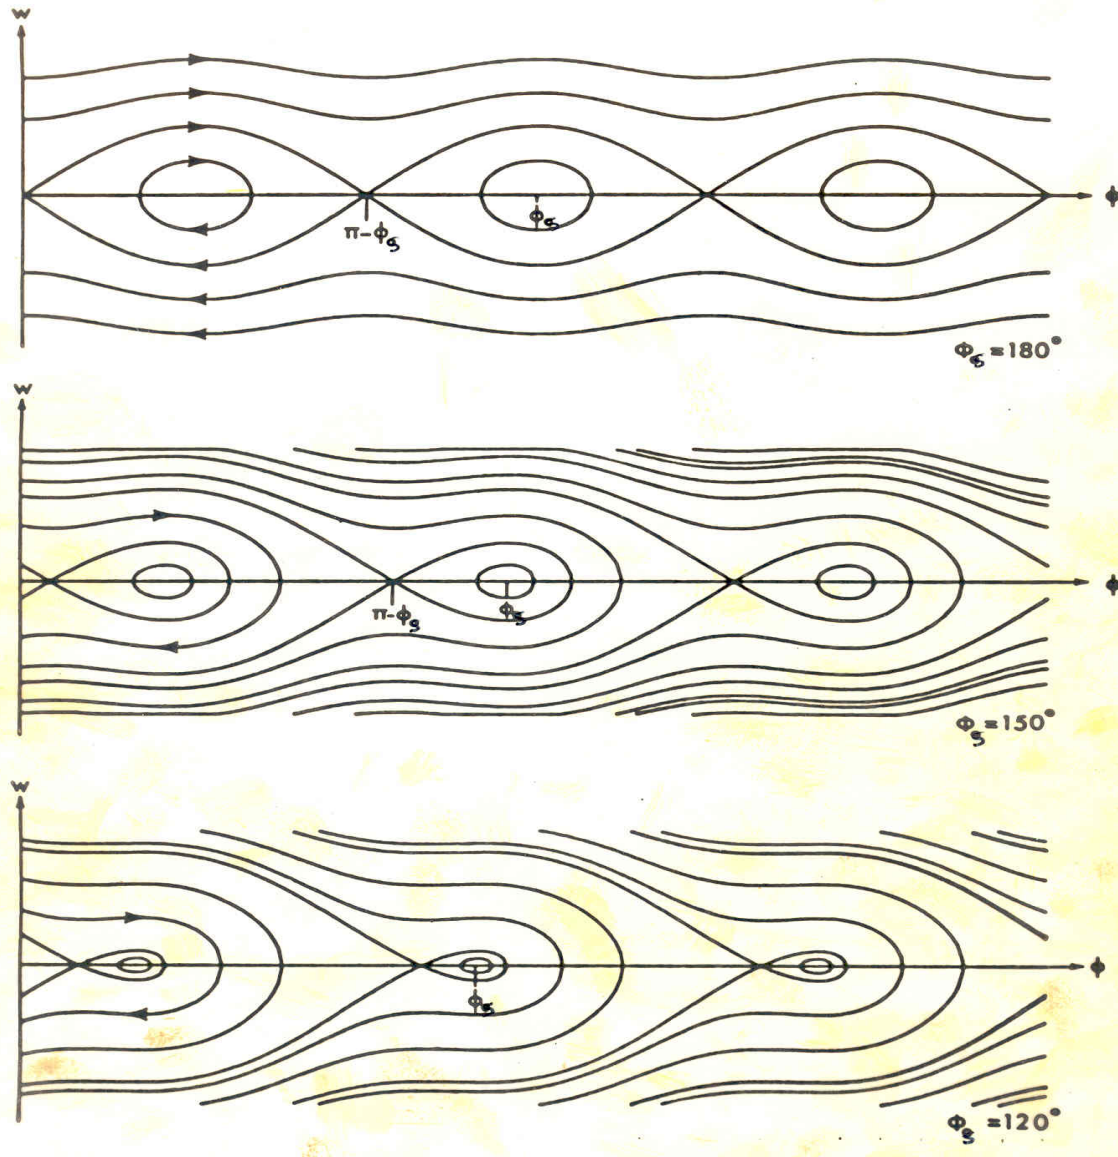

The areas of stable motion (closed trajectories) are called "BUCKET".

As the synchronous phase gets closer to 90° the buckets get smaller.

The number of circulating buckets is equal to "h".

The phase extension of the bucket is maximum for $\phi_s = 180^\circ$ (or 0°) which correspond to no acceleration. The RF acceptance increases with the RF voltage.

Longitudinal Dynamics in Synchrotrons

It is also often called "synchrotron motion".

The RF acceleration process clearly emphasizes two coupled variables, the **energy** gained by the particle and the **RF phase** experienced by the same particle. Since there is a well defined synchronous particle which has always the same phase ϕ_s , and the nominal energy E_s , it is sufficient to follow other particles with respect to that particle.

So let's introduce the following reduced variables:

$$\text{revolution frequency} : \quad \Delta f_r = f_r - f_{rs}$$


$$\text{particle RF phase} : \quad \Delta\phi = \phi - \phi_s$$

$$\text{particle momentum} : \quad \Delta p = p - p_s$$

$$\text{particle energy} : \quad \Delta E = E - E_s$$

$$\text{azimuth angle} : \quad \Delta\theta = \theta - \theta_s$$

First Energy-Phase Equation

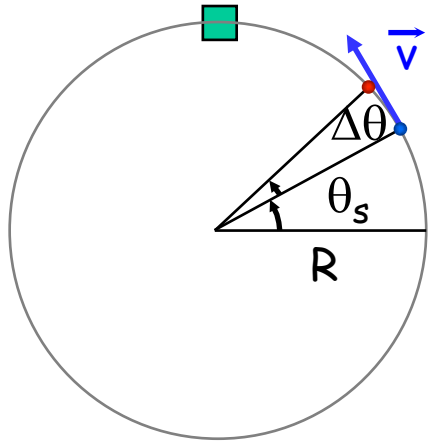

$$f_{RF} = h f_r \Rightarrow \Delta\phi = -h \Delta\theta \quad \text{with} \quad \theta = \int \omega dt$$

particle ahead arrives earlier
 \Rightarrow smaller RF phase

For a given particle with respect to the reference one:

$$\Delta\omega = \frac{d}{dt}(\Delta\theta) = -\frac{1}{h} \frac{d}{dt}(\Delta\phi) = -\frac{1}{h} \frac{d\phi}{dt}$$

Since:

$$\eta = \frac{p_s}{\omega_{rs}} \left(\frac{d\omega}{dp} \right)_s$$

and

$$E^2 = E_0^2 + p^2 c^2$$

$$\Delta E = v_s \Delta p = \omega_{rs} R_s \Delta p$$

one gets:

$$\frac{\Delta E}{\omega_{rs}} = -\frac{p_s R_s}{h \eta \omega_{rs}} \frac{d(\Delta\phi)}{dt} = -\frac{p_s R_s}{h \eta \omega_{rs}} \dot{\phi}$$

Second Energy-Phase Equation

The rate of energy gained by a particle is: $\frac{dE}{dt} = e\hat{V} \sin\phi \frac{\omega_r}{2\pi}$

The rate of relative energy gain with respect to the reference particle is then:

$$2\pi \Delta \left(\frac{\dot{E}}{\omega_r} \right) = e\hat{V} (\sin\phi - \sin\phi_s)$$

Expanding the left-hand side to first order:

$$\Delta \left(\dot{E} T_r \right) \cong \dot{E} \Delta T_r + T_{rs} \Delta \dot{E} = \Delta E \dot{T}_r + T_{rs} \Delta \dot{E} = \frac{d}{dt} \left(T_{rs} \Delta E \right)$$

leads to the second energy-phase equation:

$$2\pi \frac{d}{dt} \left(\frac{\Delta E}{\omega_{rs}} \right) = e\hat{V} (\sin\phi - \sin\phi_s)$$

Equations of Longitudinal Motion

$$\frac{\Delta E}{\omega_{rs}} = -\frac{p_s R_s}{h \eta \omega_{rs}} \frac{d(\Delta \phi)}{dt} = -\frac{p_s R_s}{h \eta \omega_{rs}} \dot{\phi}$$

$$2\pi \frac{d}{dt} \left(\frac{\Delta E}{\omega_{rs}} \right) = e \hat{V} (\sin \phi - \sin \phi_s)$$

deriving and combining

$$\frac{d}{dt} \left[\frac{R_s p_s}{h \eta \omega_{rs}} \frac{d\phi}{dt} \right] + \frac{e \hat{V}}{2\pi} (\sin \phi - \sin \phi_s) = 0$$

This second order equation is non linear. Moreover the parameters within the bracket are in general slowly varying with time.

We will study some cases in the following...

Small Amplitude Oscillations

Let's assume constant parameters R_s , p_s , ω_s and η :

$$\ddot{\phi} + \frac{\Omega_s^2}{\cos\phi_s} (\sin\phi - \sin\phi_s) = 0$$

with

$$\Omega_s^2 = \frac{h\eta\omega_{rs}e\hat{V}\cos\phi_s}{2\pi R_s p_s}$$

Consider now **small** phase **deviations** from the reference particle:

$$\sin\phi - \sin\phi_s = \sin(\phi_s + \Delta\phi) - \sin\phi_s \cong \cos\phi_s \Delta\phi \quad (\text{for small } \Delta\phi)$$

and the corresponding linearized motion reduces to a **harmonic oscillation**:


$$\ddot{\phi} + \Omega_s^2 \Delta\phi = 0$$

where Ω_s is the synchrotron angular frequency

Stability condition for ϕ_s

Stability is obtained when Ω_s is real and so Ω_s^2 positive:

$$\Omega_s^2 = \frac{e \hat{V}_{RF} \eta h \omega_s}{2\pi R_s p_s} \cos \phi_s \Rightarrow \Omega_s^2 > 0 \Leftrightarrow \eta \cos \phi_s > 0$$

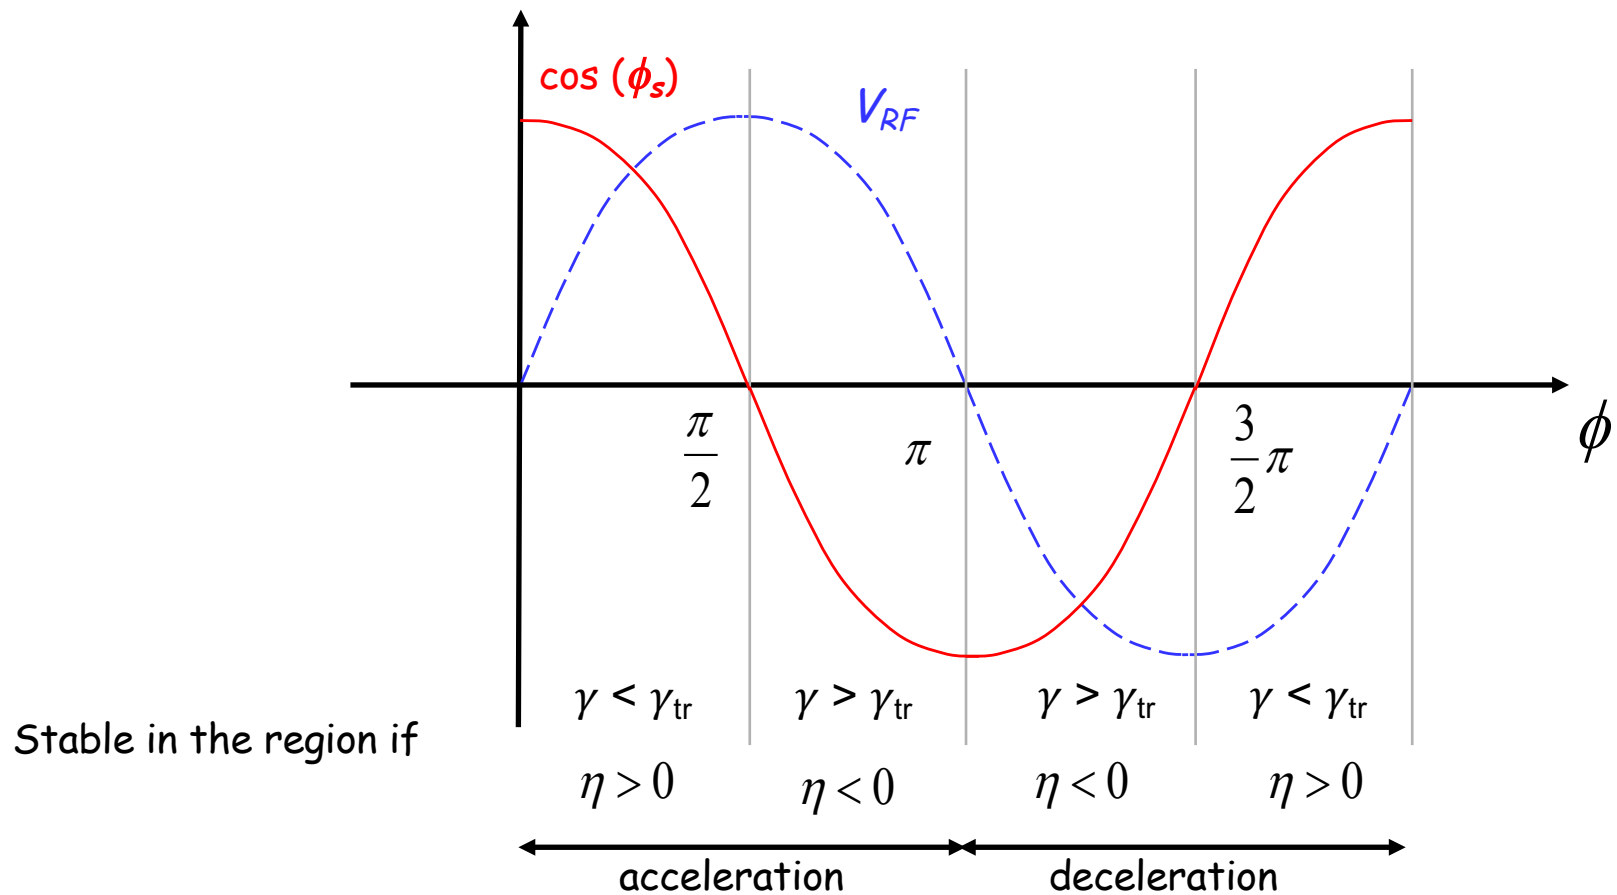

Large Amplitude Oscillations

For larger phase (or energy) deviations from the reference the second order differential equation is non-linear:

$$\ddot{\phi} + \frac{\Omega_s^2}{\cos \phi_s} (\sin \phi - \sin \phi_s) = 0 \quad (\Omega_s \text{ as previously defined})$$

Multiplying by $\dot{\phi}$ and integrating gives an invariant of the motion:

$$\frac{\dot{\phi}^2}{2} - \frac{\Omega_s^2}{\cos \phi_s} (\cos \phi + \phi \sin \phi_s) = I$$

which for small amplitudes reduces to:


$$\frac{\dot{\phi}^2}{2} + \Omega_s^2 \frac{(\Delta\phi)^2}{2} = I' \quad (\text{the variable is } \Delta\phi, \text{ and } \phi_s \text{ is constant})$$

Similar equations exist for the second variable : $\Delta E \propto d\phi/dt$

Large Amplitude Oscillations (2)

When ϕ reaches $\pi - \phi_s$ the force goes to zero and beyond it becomes non restoring.

Hence $\pi - \phi_s$ is an extreme amplitude for a stable motion which in the phase space $(\frac{\dot{\phi}}{\Omega_s}, \Delta\phi)$ is shown as closed trajectories.

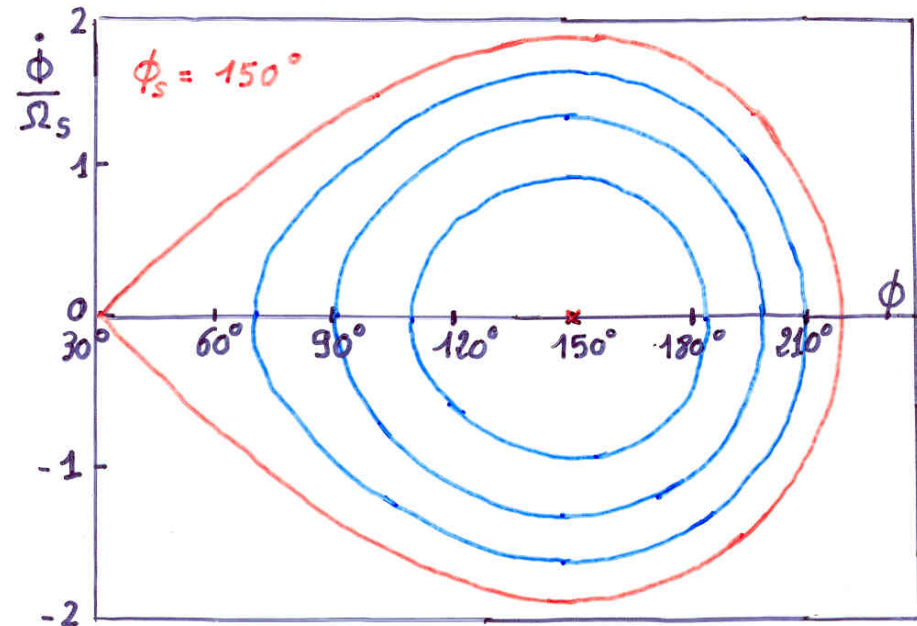

Equation of the **separatrix**:

$$\frac{\dot{\phi}^2}{2} - \frac{\Omega_s^2}{\cos \phi_s} (\cos \phi + \phi \sin \phi_s) = -\frac{\Omega_s^2}{\cos \phi_s} (\cos(\pi - \phi_s) + (\pi - \phi_s) \sin \phi_s)$$

Second value ϕ_m where the separatrix crosses the horizontal axis:

$$\cos \phi_m + \phi_m \sin \phi_s = \cos(\pi - \phi_s) + (\pi - \phi_s) \sin \phi_s$$

Energy Acceptance

From the equation of motion it is seen that $\dot{\phi}$ reaches an extreme when $\ddot{\phi} = 0$, hence corresponding to $\phi = \phi_s$.

Introducing this value into the equation of the separatrix gives:

$$\dot{\phi}_{\max}^2 = 2\Omega_s^2 \left\{ 2 + (2\phi_s - \pi) \tan \phi_s \right\}$$

That translates into an **acceptance in energy**:

$$\left(\frac{\Delta E}{E_s} \right)_{\max} = \mp \beta \sqrt{-\frac{e\hat{V}}{\pi h \eta E_s} G(\phi_s)}$$


$$G(\phi_s) = [2\cos\phi_s + (2\phi_s - \pi)\sin\phi_s]$$

This “**RF acceptance**” depends strongly on ϕ_s and plays an important role for the capture at injection, and the stored beam lifetime.

It's **largest** for $\phi_s=0$ and $\phi_s=\pi$ (**no acceleration**, depending on η).

Need a **higher RF voltage** for **higher acceptance**.

RF Acceptance versus Synchronous Phase

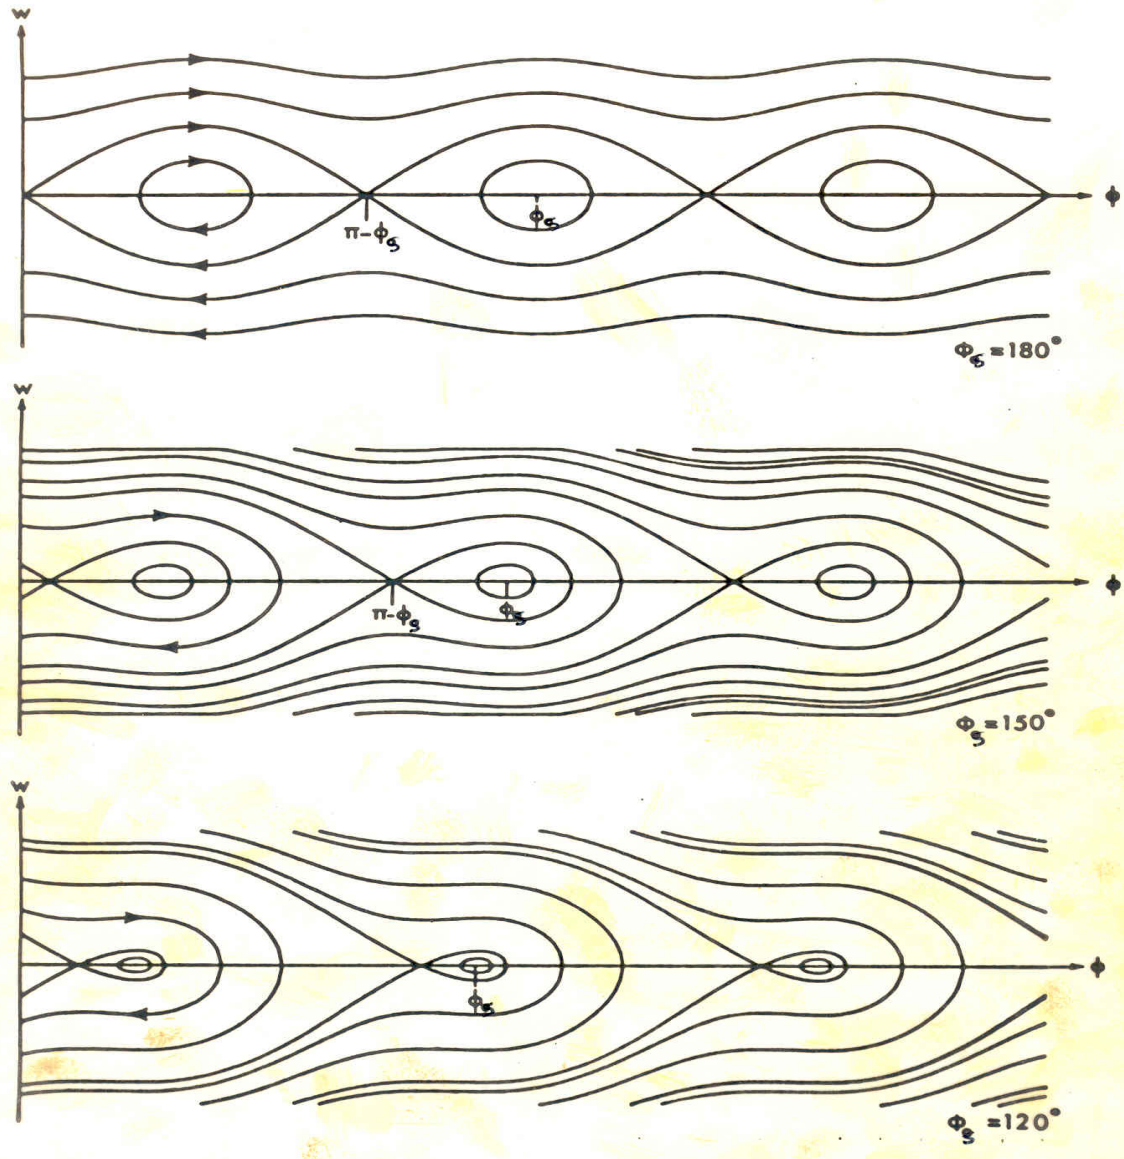

The areas of stable motion (closed trajectories) are called "BUCKET".

As the synchronous phase gets closer to 90° the buckets get smaller.

The number of circulating buckets is equal to "h".

The phase extension of the bucket is maximum for $\phi_s = 180^\circ$ (or 0°) which correspond to no acceleration. The RF acceptance increases with the RF voltage.

Stationnary Bucket - Separatrix


This is the case $\sin\phi_s=0$ (no acceleration) which means $\phi_s=0$ or π . The equation of the separatrix for $\phi_s= \pi$ (above transition) becomes:

$$\frac{\dot{\phi}^2}{2} + \Omega_s^2 \cos \phi = \Omega_s^2$$

$$\frac{\dot{\phi}^2}{2} = 2\Omega_s^2 \sin^2 \frac{\phi}{2}$$

Replacing the phase derivative by the (canonical) variable W :

$$W = \frac{\Delta E}{\omega_{rf}} = - \frac{p_s R_s}{h\eta \omega_{rf}} \dot{\phi}$$

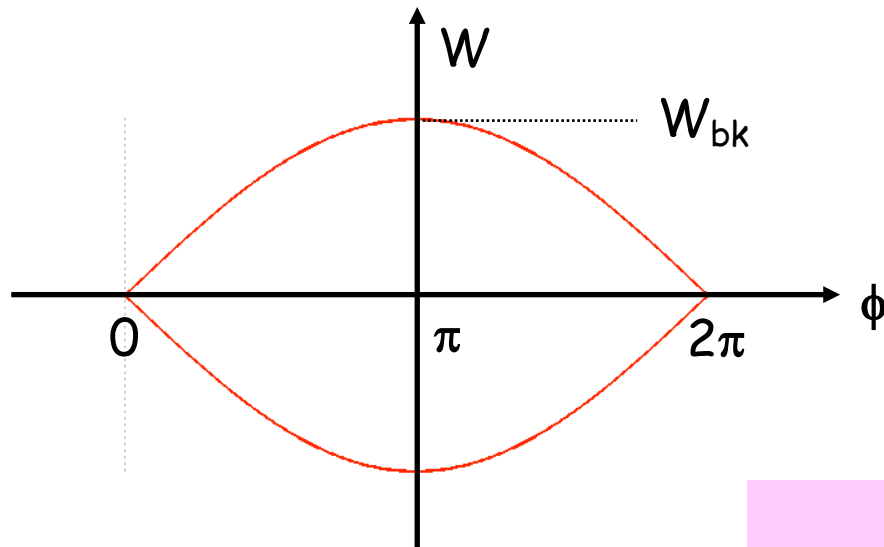

with $C=2\pi R_s$

and introducing the expression for Ω_s leads to the following equation for the separatrix:

$$W = \pm \frac{C}{\pi h c} \sqrt{\frac{-e \hat{V} E_s}{2\pi h \eta}} \sin \frac{\phi}{2} = \pm W_{bk} \sin \frac{\phi}{2}$$

Stationnary Bucket (2)

Setting $\phi=\pi$ in the previous equation gives the height of the bucket:

$$W_{bk} = \frac{C}{\pi h c} \sqrt{\frac{-e \hat{V} E_s}{2 \pi h \eta}}$$

This results in the **maximum energy acceptance**:

$$\Delta E_{\max} = \omega_{rf} W_{bk} = \beta_s \sqrt{2 \frac{-e \hat{V}_{RF} E_s}{\pi \eta h}}$$


The area of the bucket is: $A_{bk} = 2 \int_0^{2\pi} W d\phi$

Since: $\int_0^{2\pi} \sin \frac{\phi}{2} d\phi = 4$


one gets: $A_{bk} = 8W_{bk} = 8 \frac{C}{\pi h c} \sqrt{\frac{-e \hat{V} E_s}{2 \pi h \eta}} \longrightarrow W_{bk} = \frac{A_{bk}}{8}$

Effect of a Mismatch


Injected bunch: short length and large energy spread
 after 1/4 synchrotron period: longer bunch with a smaller energy spread.

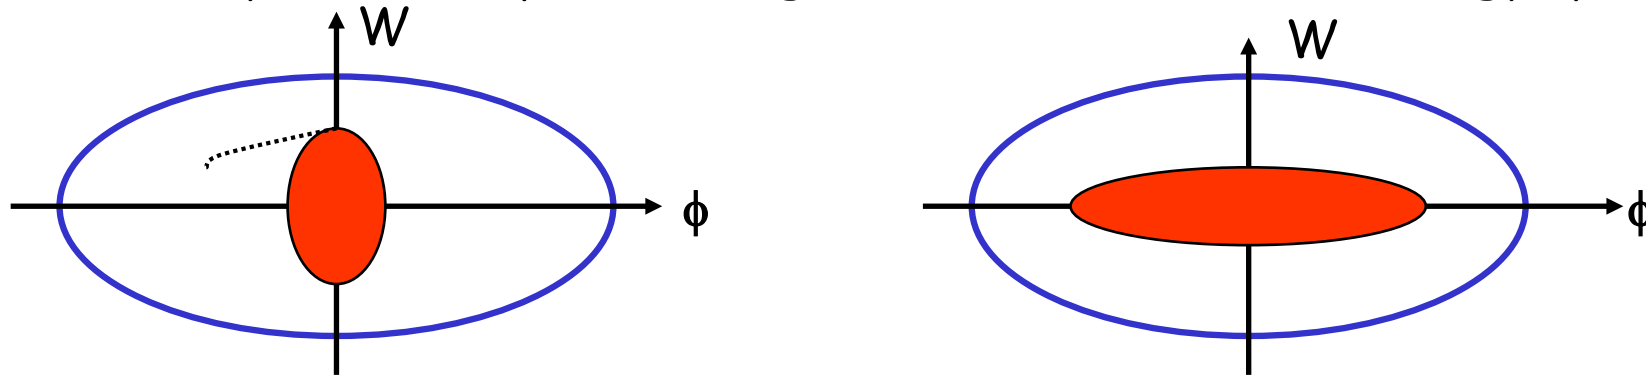


For **larger amplitudes**, the angular phase space motion is slower (1/8 period shown below) => can lead to **filamentation** and **emittance growth**

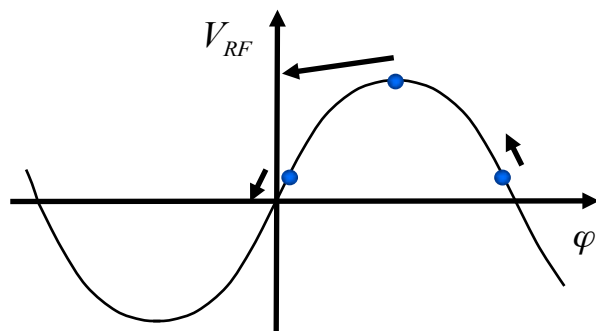

restoring force is non-linear

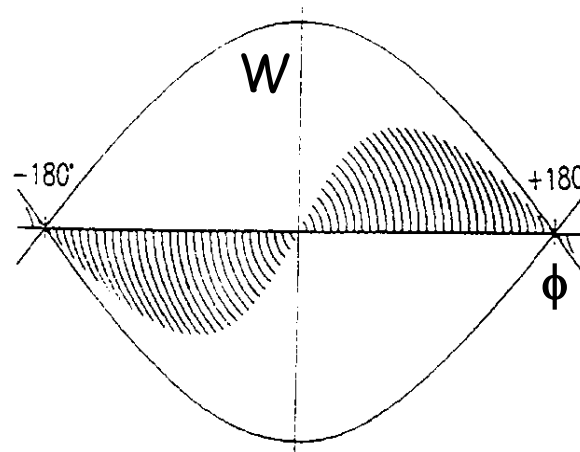

stationary bucket

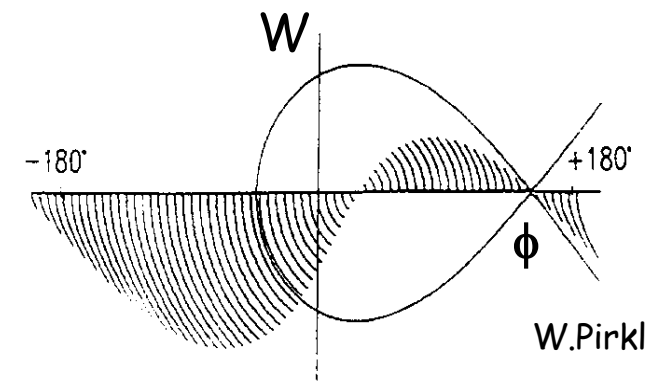


accelerating bucket

W.Pirkel

Bunch Matching into a Stationnary Bucket

A particle trajectory inside the separatrix is described by the equation:

$$\frac{\dot{\phi}^2}{2} - \frac{\Omega_s^2}{\cos\phi_s} (\cos\phi + \phi \sin\phi_s) = I \quad \xrightarrow{\phi_s = \pi} \quad \frac{\dot{\phi}^2}{2} + \Omega_s^2 \cos\phi = I$$

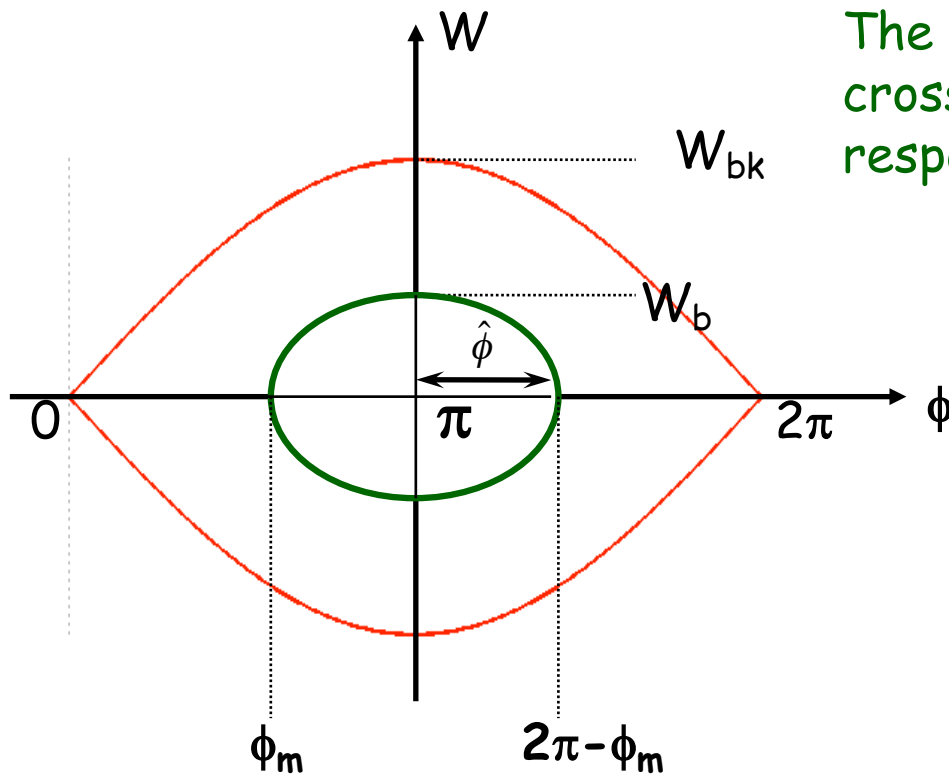

The points where the trajectory crosses the axis are symmetric with respect to $\phi_s = \pi$

$$\frac{\dot{\phi}^2}{2} + \Omega_s^2 \cos\phi = \Omega_s^2 \cos\phi_m$$

$$\dot{\phi} = \pm \Omega_s \sqrt{2(\cos\phi_m - \cos\phi)}$$

$$W = \pm W_{bk} \sqrt{\cos^2 \frac{\varphi_m}{2} - \cos^2 \frac{\varphi}{2}}$$

$$\cos(\phi) = 2 \cos^2 \frac{\phi}{2} - 1$$

Bunch Matching into a Stationnary Bucket (2)

Setting $\phi = \pi$ in the previous formula allows to calculate the bunch height:

$$W_b = W_{bk} \cos \frac{\phi_m}{2} = W_{bk} \sin \frac{\hat{\phi}}{2}$$

or:

$$W_b = \frac{A_{bk}}{8} \cos \frac{\phi_m}{2}$$

$$\longrightarrow \left(\frac{\Delta E}{E_s} \right)_b = \left(\frac{\Delta E}{E_s} \right)_{RF} \cos \frac{\phi_m}{2} = \left(\frac{\Delta E}{E_s} \right)_{RF} \sin \frac{\hat{\phi}}{2}$$

This formula shows that for a given bunch energy spread the proper matching of a **shorter bunch** (ϕ_m close to π , $\hat{\phi}$ small) will **require** a bigger RF acceptance, hence a **higher voltage**

For small oscillation amplitudes the equation of the ellipse reduces to:

$$W = \frac{A_{bk}}{16} \sqrt{\hat{\phi}^2 - (\Delta\phi)^2} \longrightarrow \left(\frac{16W}{A_{bk}\hat{\phi}} \right)^2 + \left(\frac{\Delta\phi}{\hat{\phi}} \right)^2 = 1$$


Ellipse area is called longitudinal emittance

$$A_b = \frac{\pi}{16} A_{bk} \hat{\phi}^2$$


Effect of a Mismatch (2)

Evolution of an injected beam for the first 100 turns.

For a matched transfer, the emittance does not grow (left).

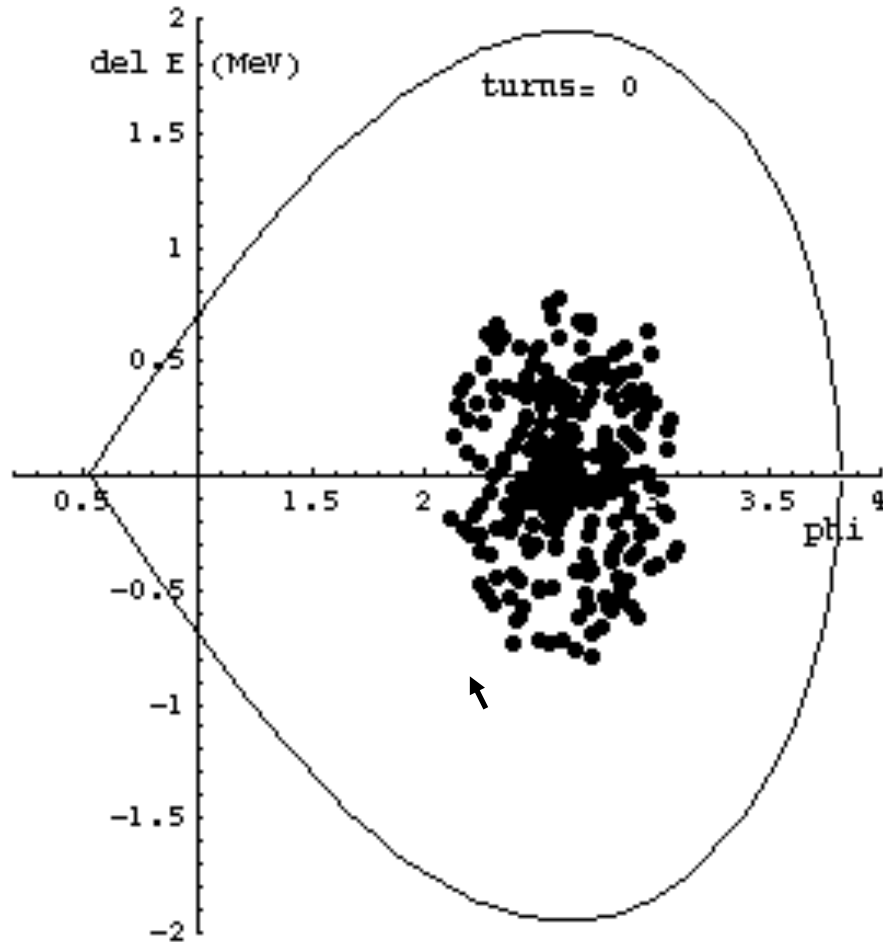

matched beam

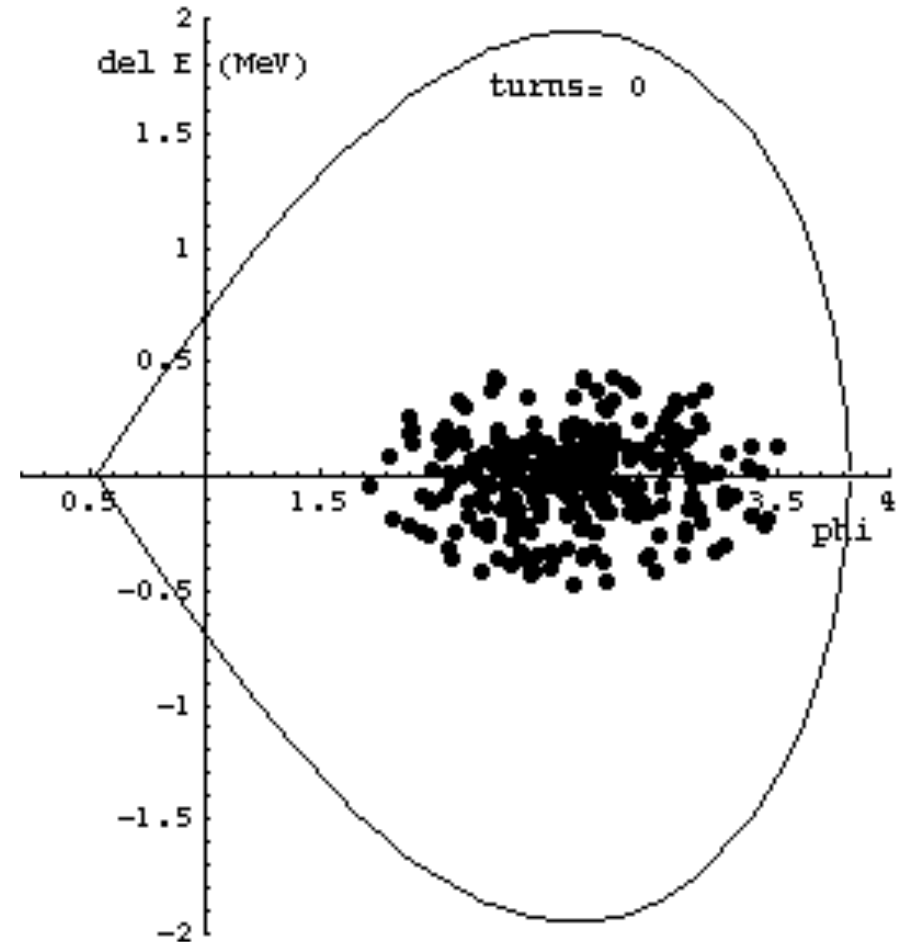


mismatched beam - bunch length


Effect of a Mismatch (3)

Evolution of an injected beam for the first 100 turns.

For a mismatched transfer, the emittance increases (right).

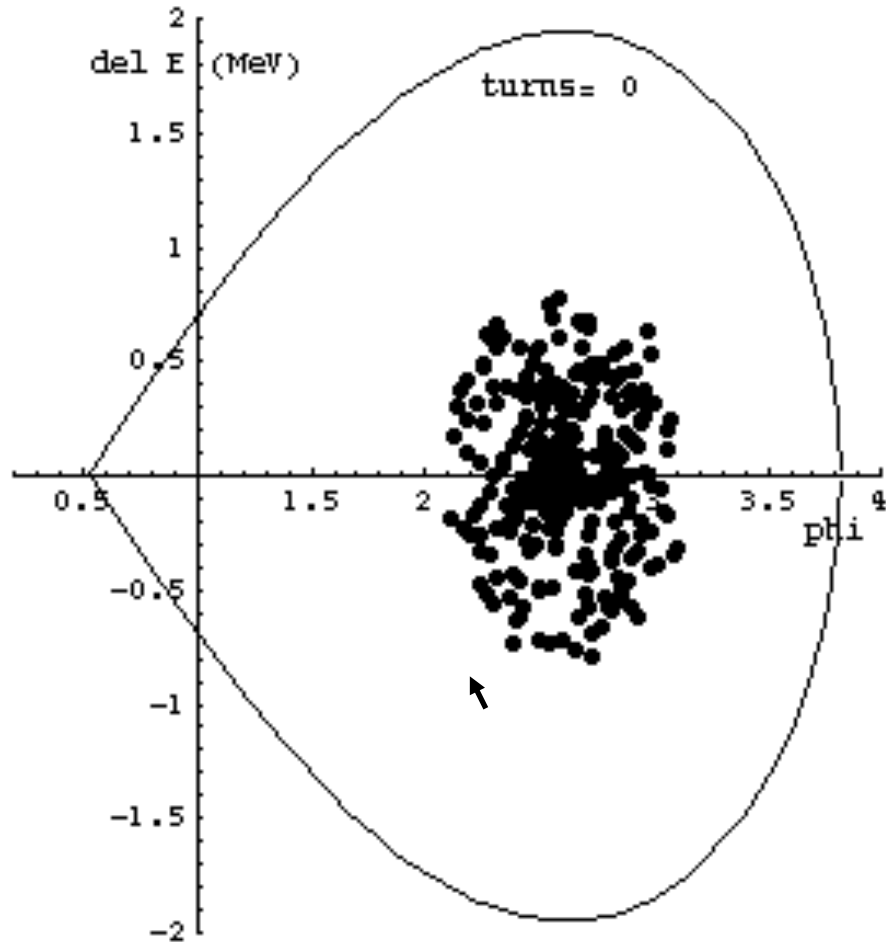

matched beam

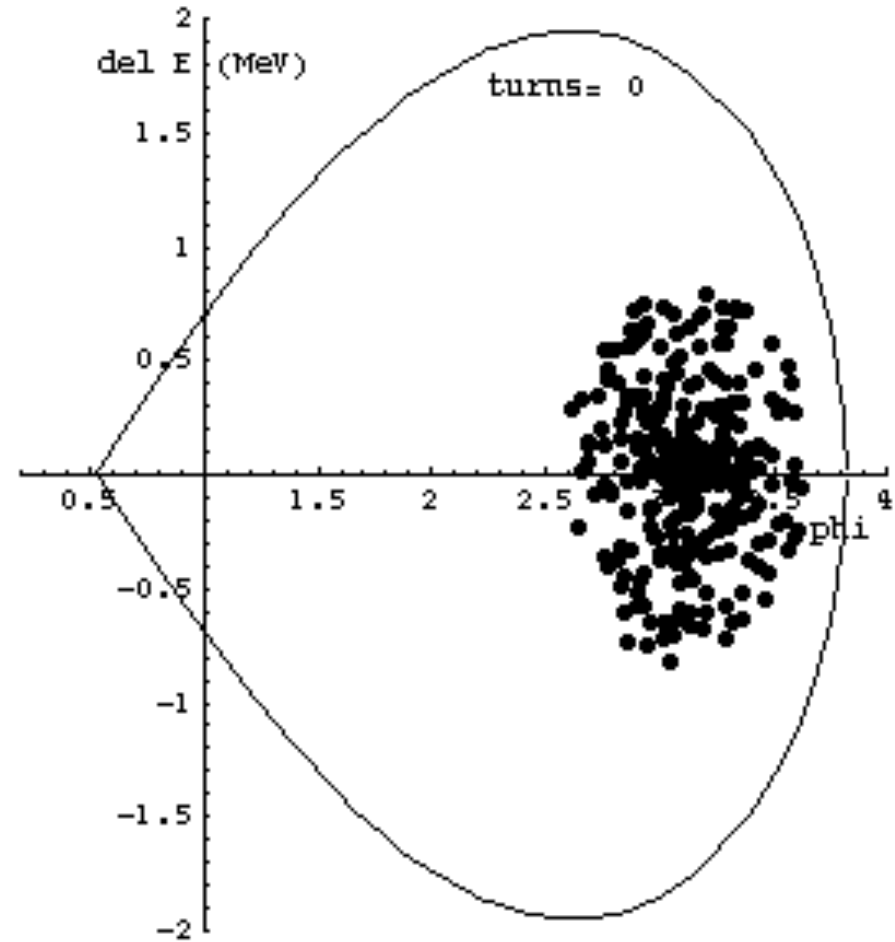


mismatched beam - phase error

Bunch Rotation



Phase space motion can be used to make short bunches.

Start with a long bunch and extract or recapture when it's short.


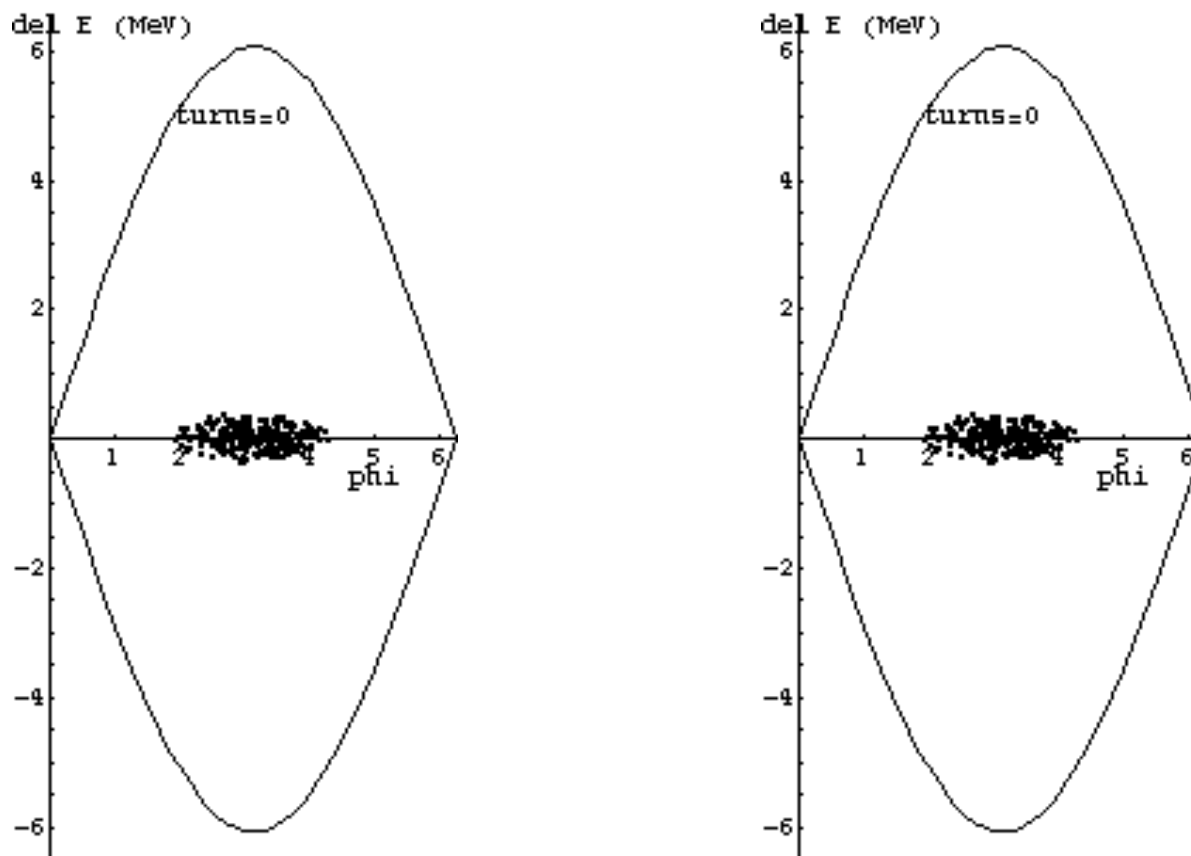


initial beam

Capture of a Debunched Beam with Fast Turn-On

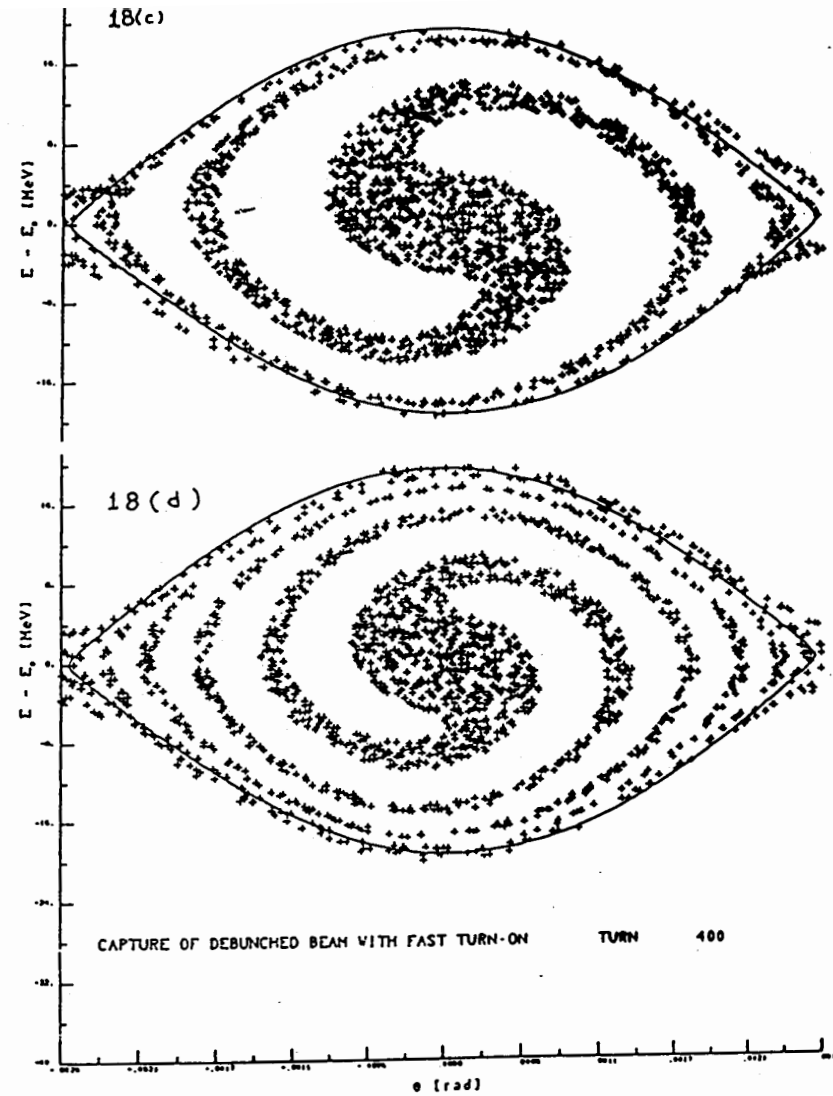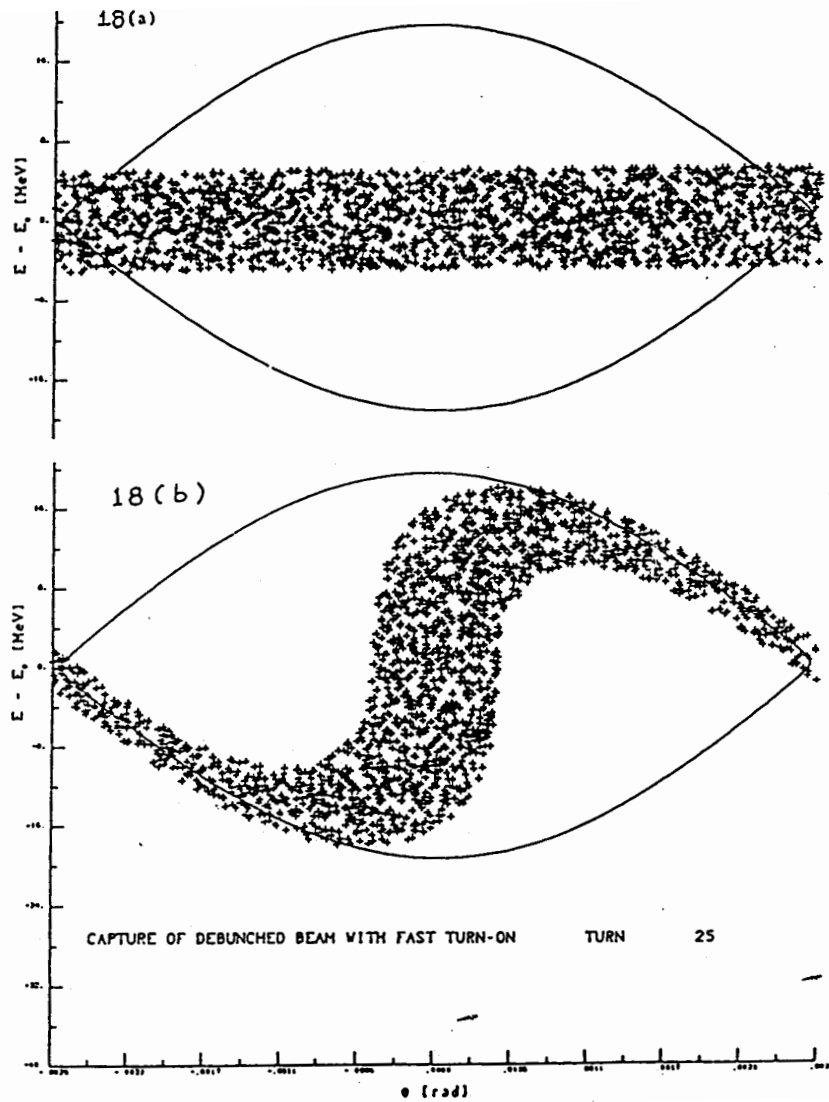


Capture of a Debunched Beam with Adiabatic Turn-On

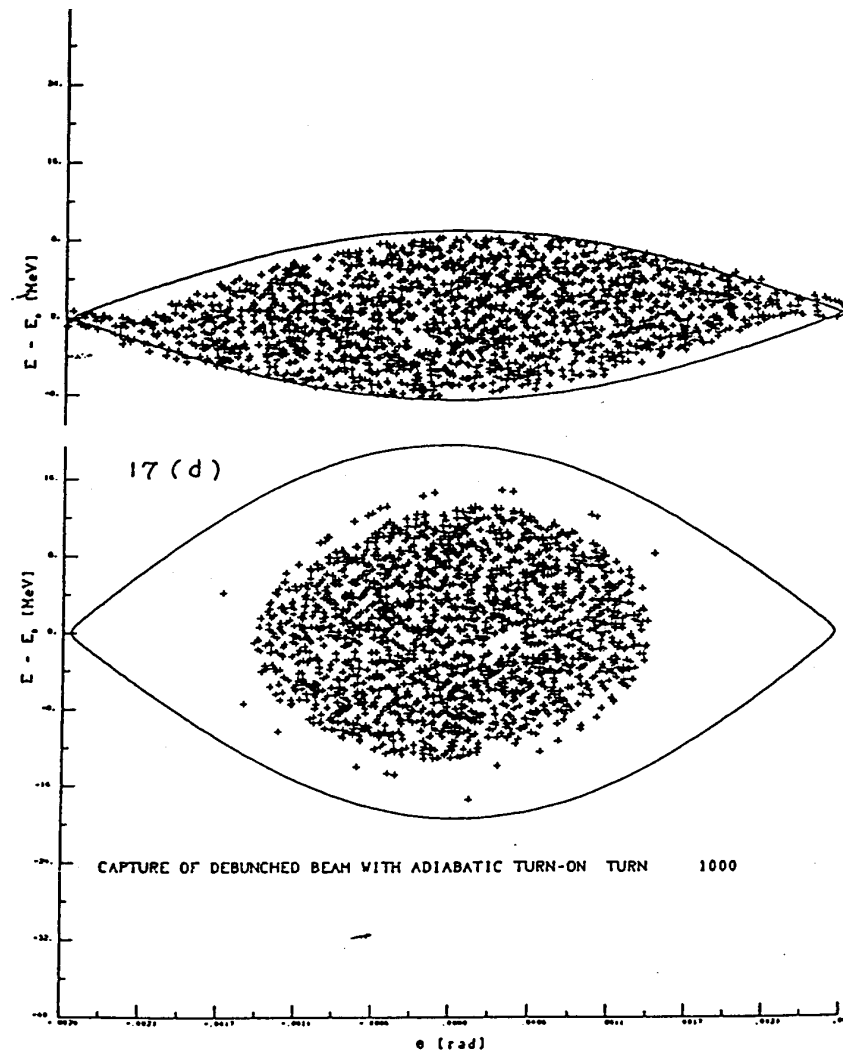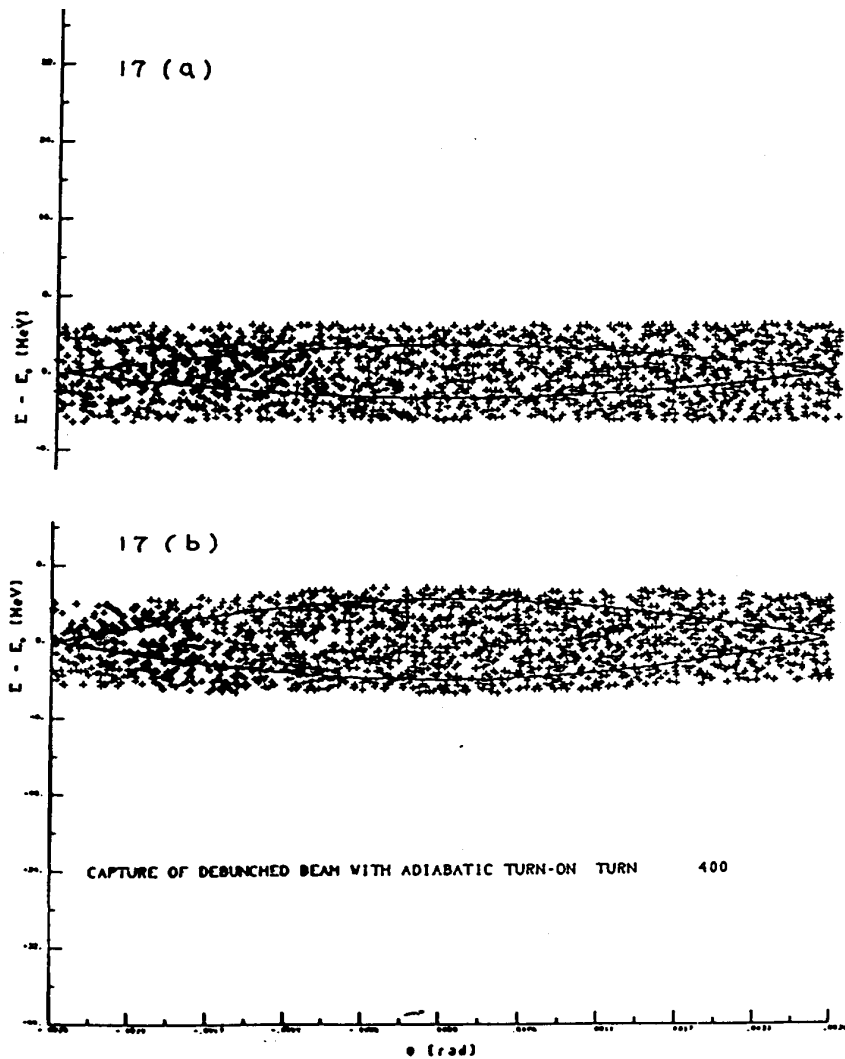

Generating a 25ns LHC Bunch Train in the PS


- **Longitudinal bunch splitting (basic principle)**
 - Reduce voltage on principal RF harmonic and simultaneously rise voltage on multiple harmonics (adiabatically with correct phase, etc.)

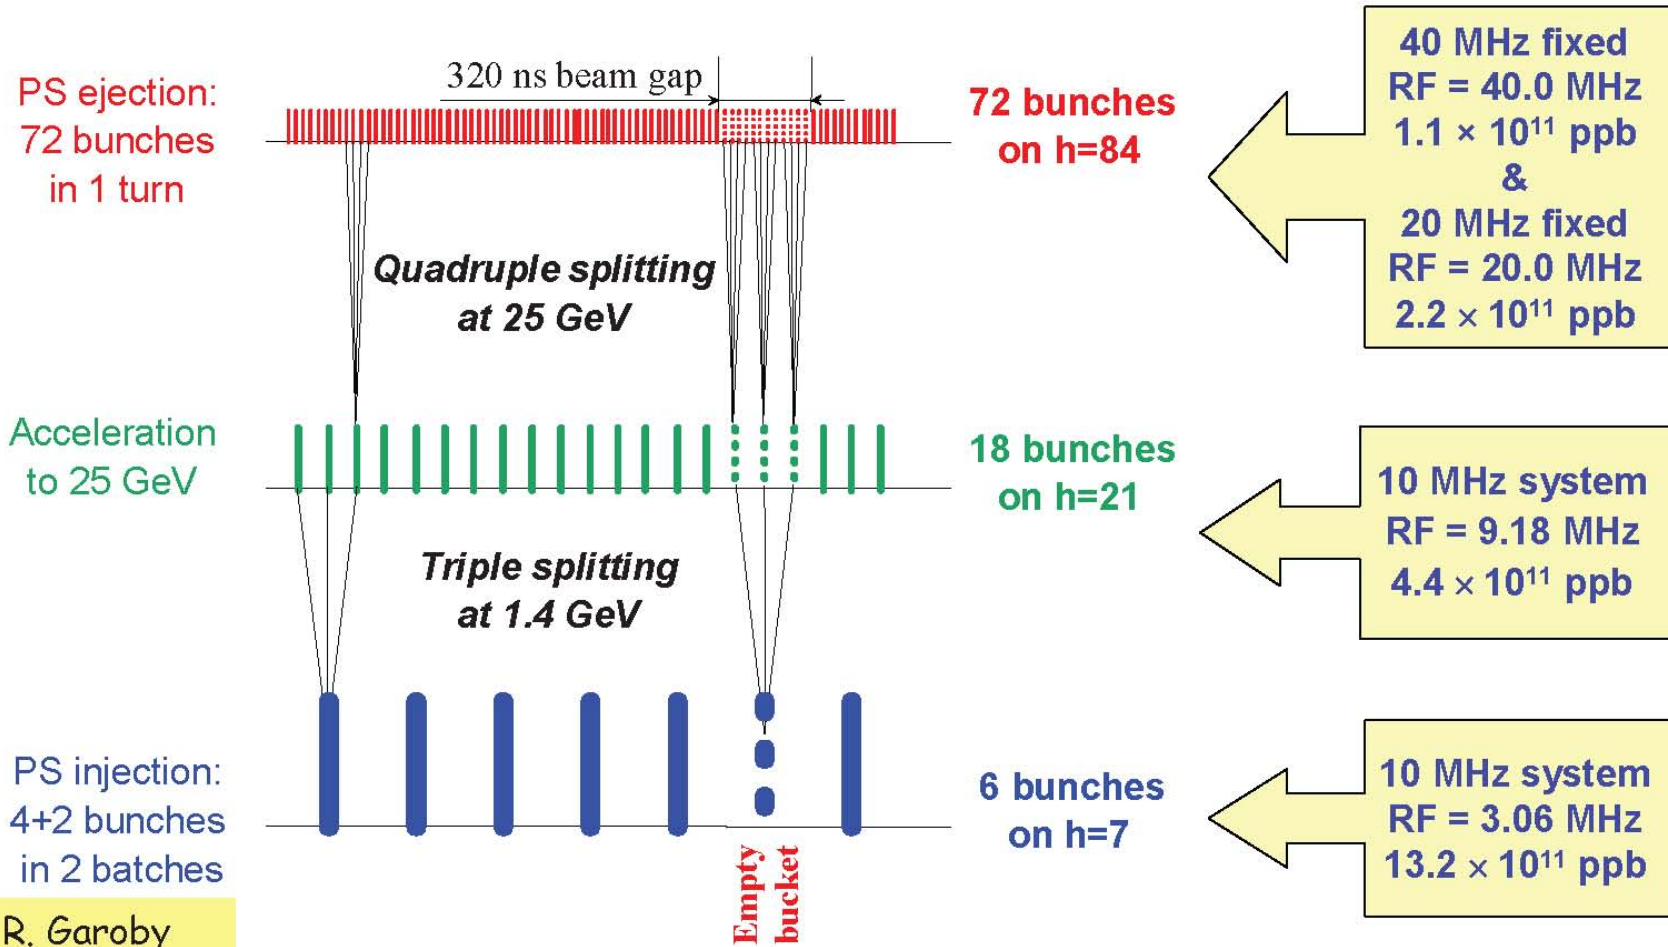

Use double splitting at 25 GeV to generate 50ns bunch trains instead


Production of the LHC 25 ns beam

1. Inject four bunches ~ 180 ns, 1.3 eVs

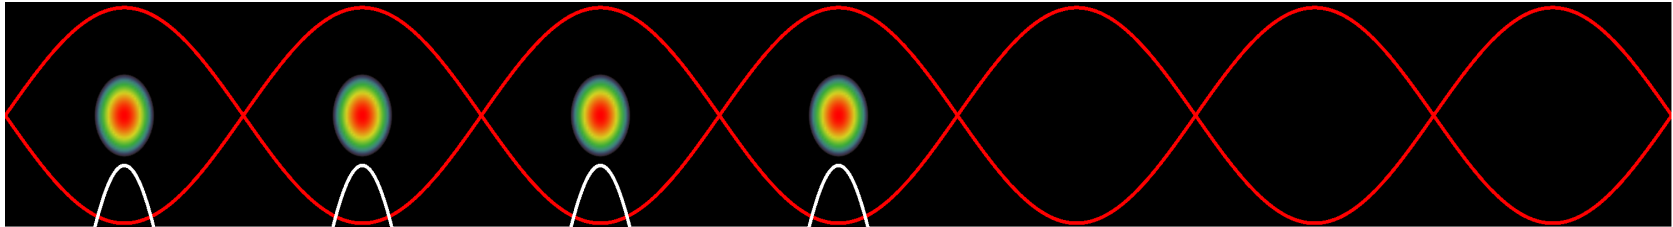


Wait 1.2 s for second injection

2. Inject two bunches

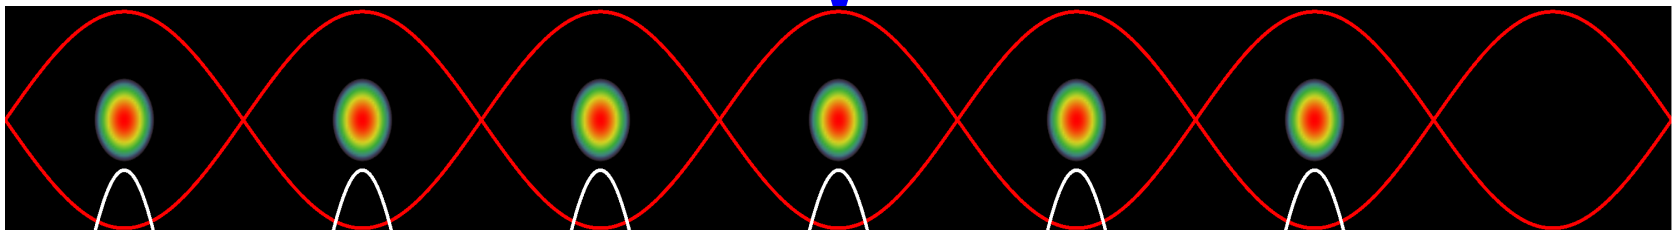

3. Triple split after second injection

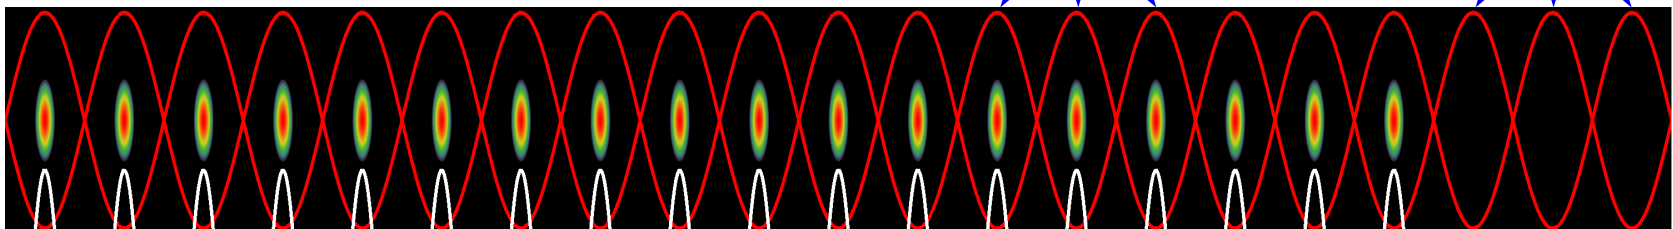


~ 0.7 eVs


4. Accelerate from 1.4 GeV (E_{kin}) to 26 GeV

Production of the LHC 25 ns beam


5. During acceleration: longitudinal emittance blow-up: **0.7 – 1.3 eVs**

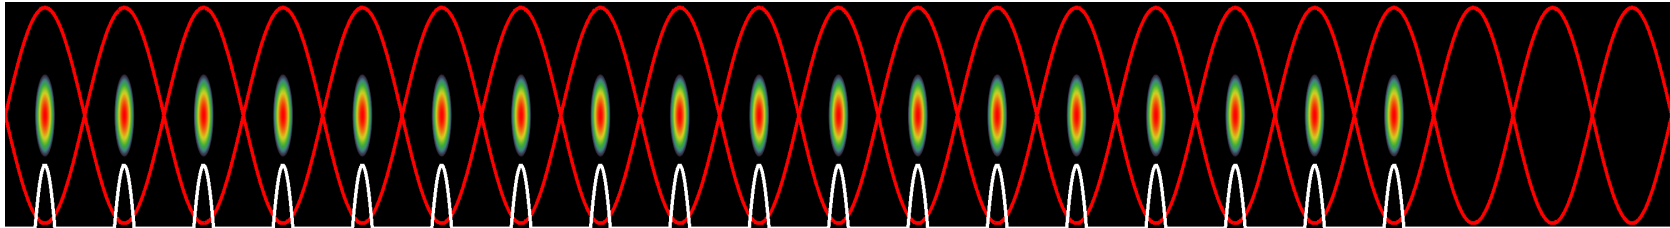

6. Double split ($h21 \rightarrow h42$)



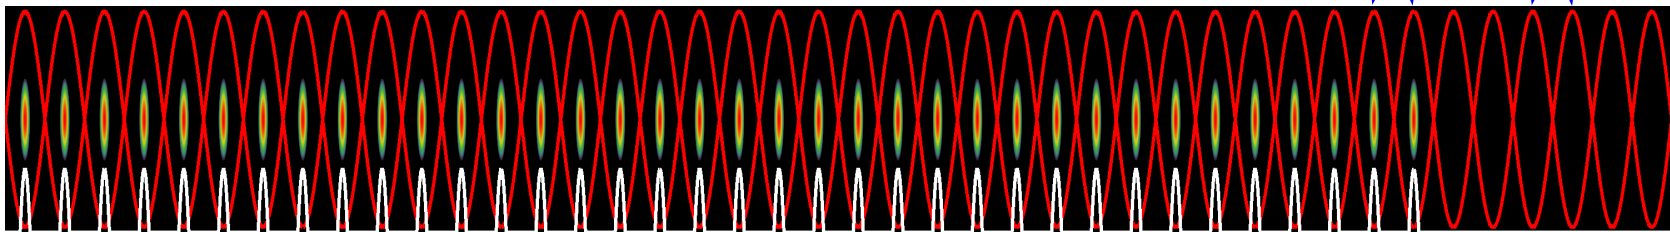


7. Double split ($h42 \rightarrow h84$) ~ 0.35 eVs, 4 ns

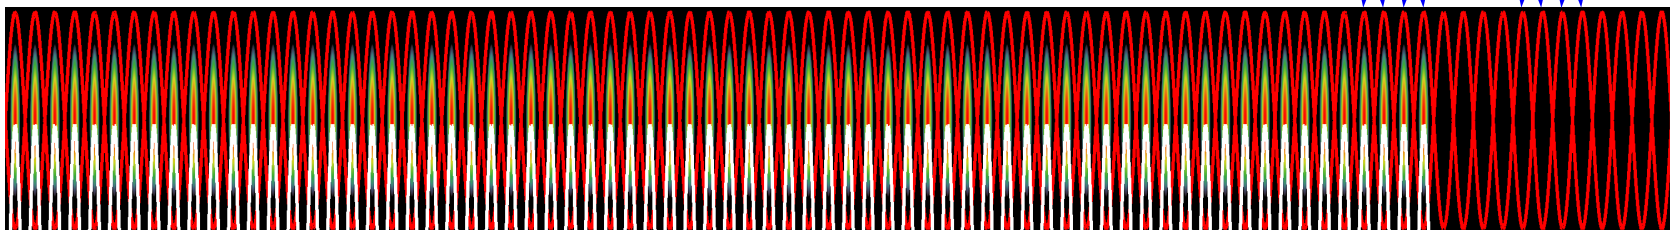


10. Fine synchronization, bunch rotation \rightarrow Extraction!

The LHC25 (ns) cycle in the PS

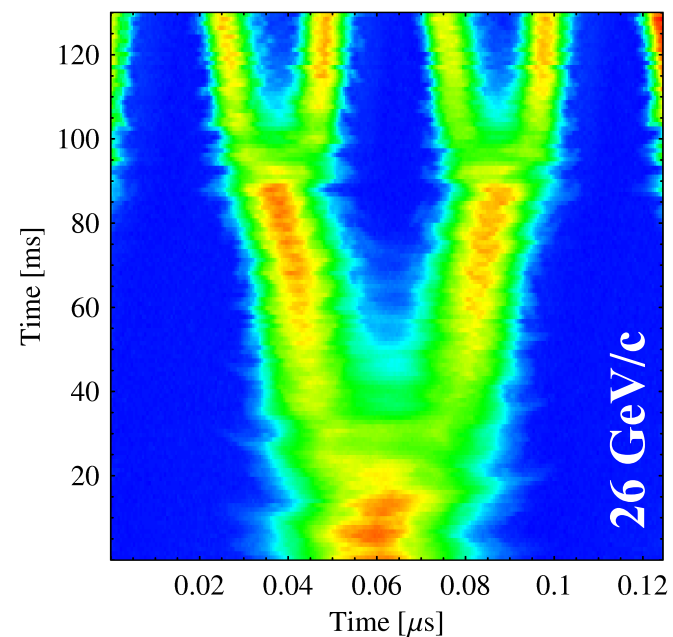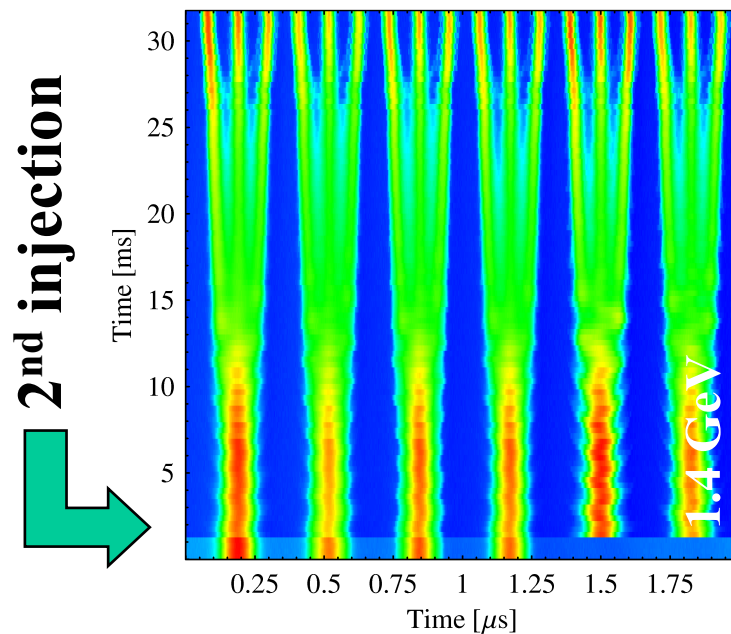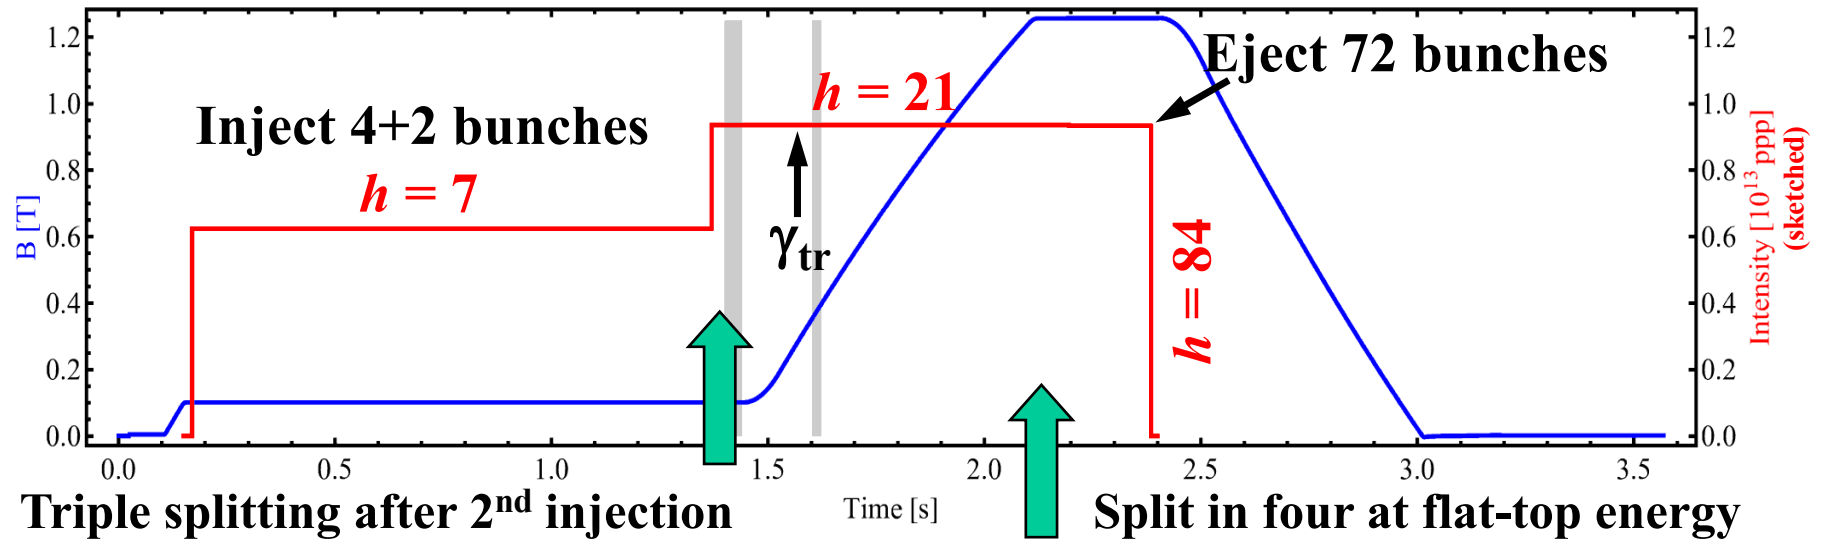



→ Each bunch from the Booster divided by $12 \rightarrow 6 \times 3 \times 2 \times 2 = 72$

Triple splitting in the PS

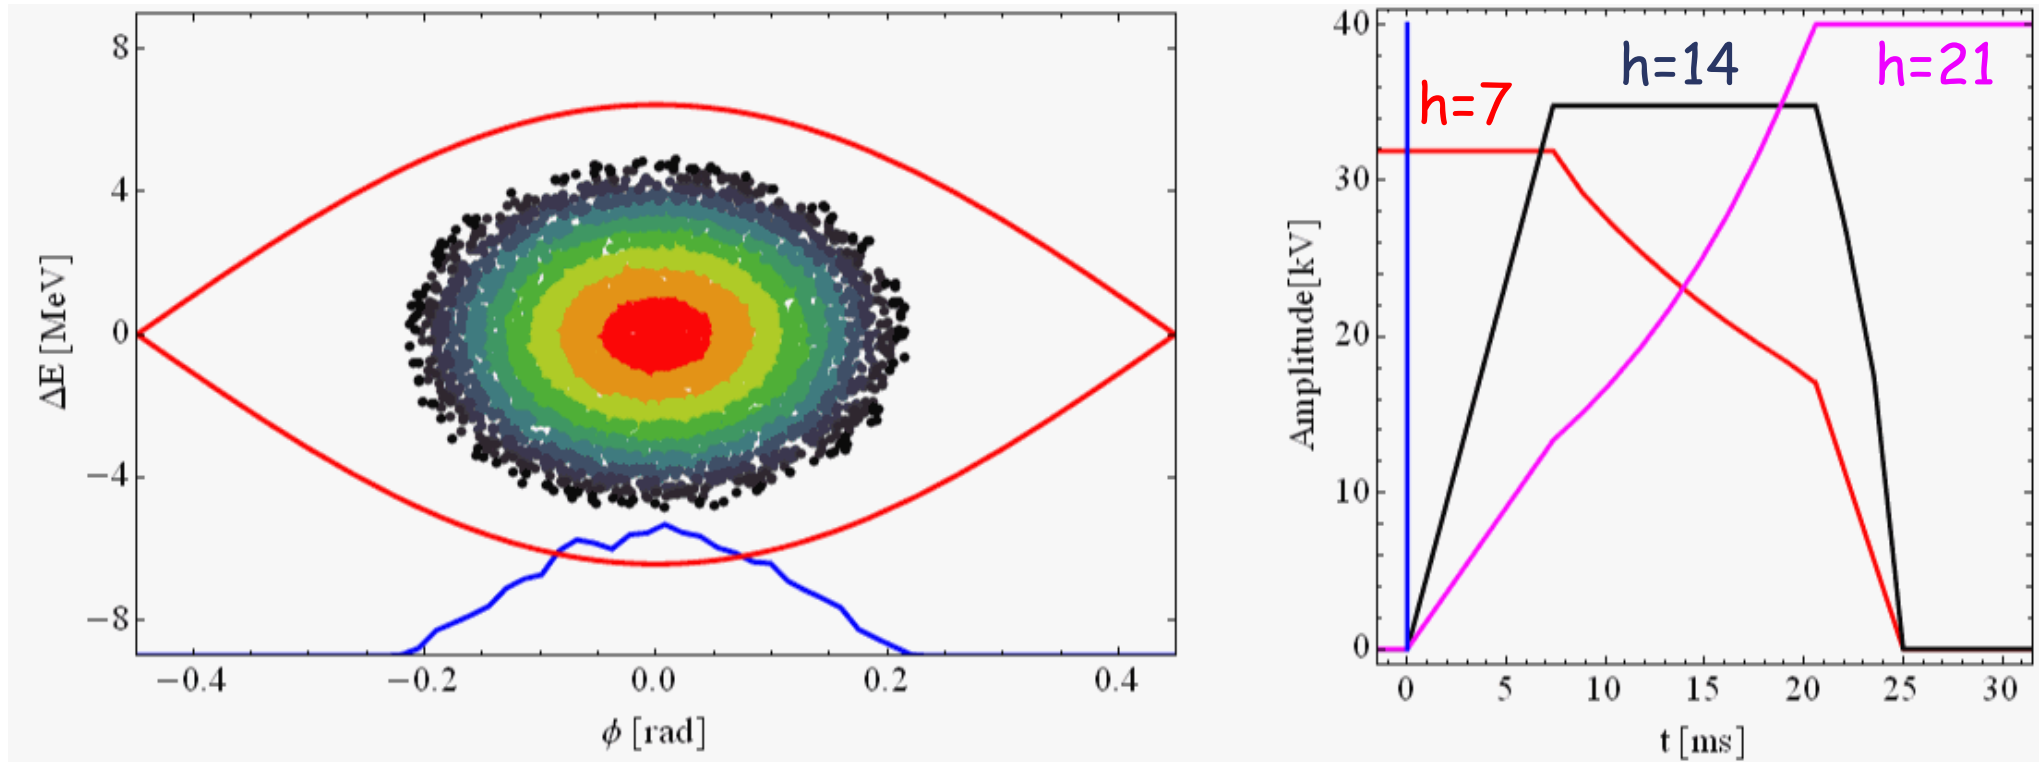

Two times double splitting in the PS

Two times double splitting and bunch rotation:

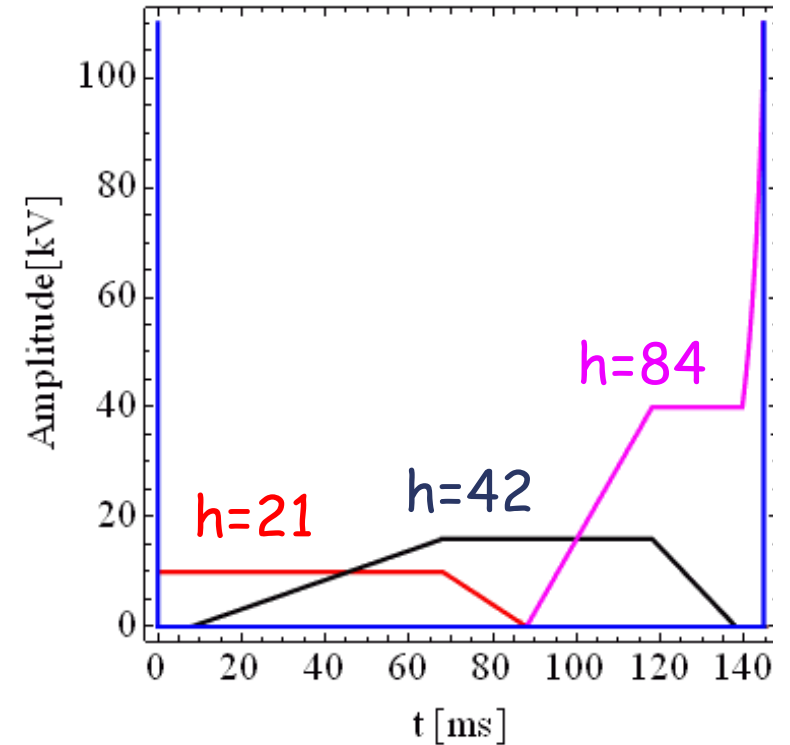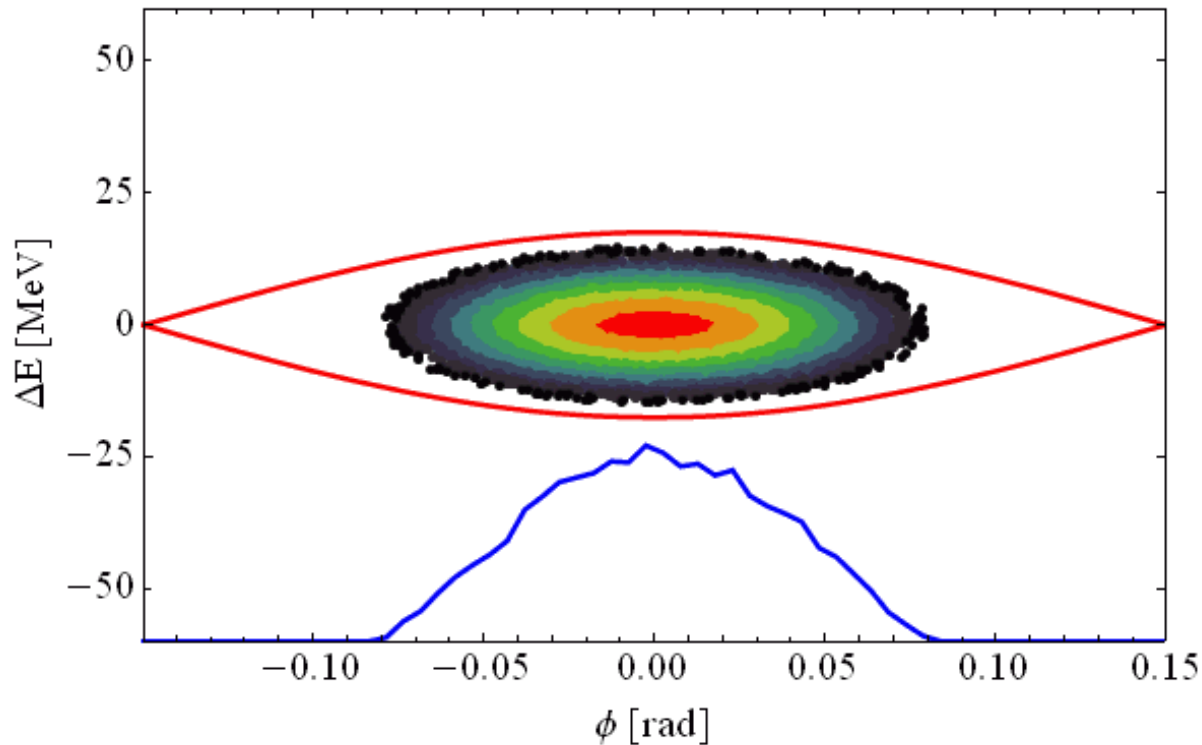


- Bunch is divided twice using RF systems at $h = 21/42$ (10/20 MHz) and $h = 42/84$ (20/40 MHz)
- Bunch rotation: first part $h84$ only + $h168$ (80 MHz) for final part

Potential Energy Function

The longitudinal motion is produced by a force that can be derived from a scalar potential:

$$\frac{d^2\phi}{dt^2} = F(\phi) \qquad F(\phi) = -\frac{\partial U}{\partial \phi}$$

$$U = -\int_0^\phi F(\phi) d\phi = -\frac{\Omega_s^2}{\cos\phi_s} (\cos\phi + \phi \sin\phi_s) - F_0$$

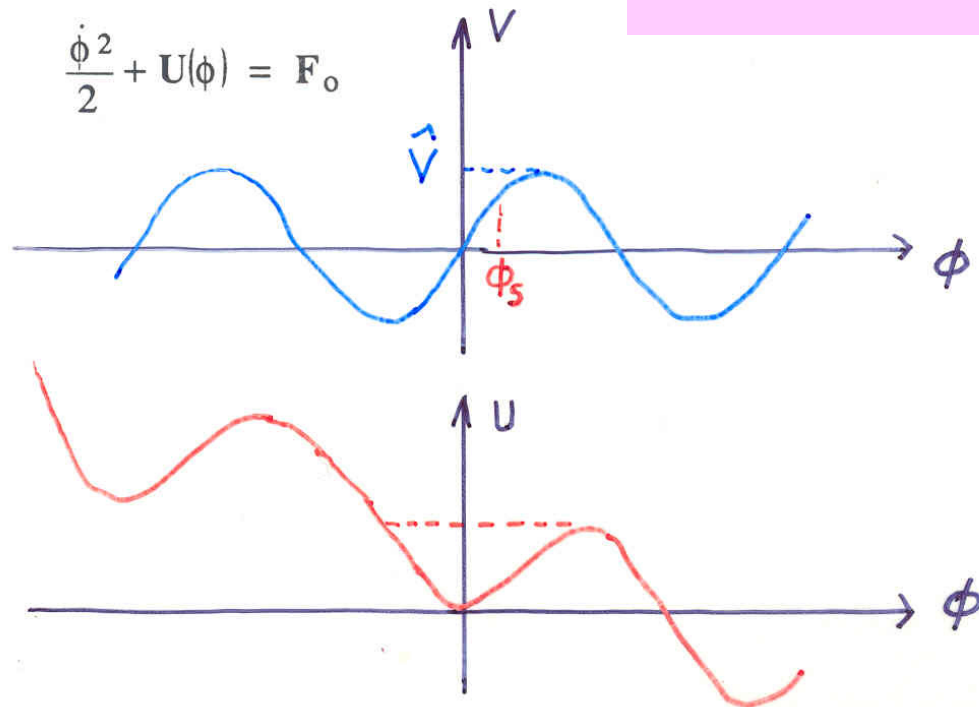

The sum of the potential energy and kinetic energy is constant and by analogy represents the total energy of a non-dissipative system.

Hamiltonian of Longitudinal Motion

Introducing a new convenient variable, W , leads to the 1st order equations:

$$W = \frac{\Delta E}{\omega_{rf}} = 2\pi R_s \Delta p$$



$$\frac{d\phi}{dt} = -\frac{h\eta\omega_{rf}}{p_s R_s} W$$

$$\frac{dW}{dt} = \frac{1}{2\pi h} e\hat{V} (\sin\phi - \sin\phi_s)$$

The two variables ϕ, W are canonical since these equations of motion can be derived from a Hamiltonian $H(\phi, W, t)$:

$$\frac{d\phi}{dt} = \frac{\partial H}{\partial W}$$

$$\frac{dW}{dt} = -\frac{\partial H}{\partial \phi}$$

$$H(\phi, W, t) = \frac{1}{2\pi h} e\hat{V} \left[\cos\phi - \cos\phi_s + (\phi - \phi_s) \sin\phi_s \right] - \frac{1}{2} \frac{h\eta\omega_{rf}}{p_s R_s} W^2$$

Summary

- Cyclotrons/Synchrocyclotrons for low energy
- **Synchrotrons** for high energies
constant orbit, rising field and frequency
- Particles with higher energy have a longer orbit (normally) but a higher velocity
 - at low energies (below transition) velocity increase dominates
 - at high energies (above transition) velocity almost constant
- Particles perform **oscillations around synchronous phase**
 - synchronous phase depending on acceleration
 - below or above transition
- **bucket** is the region in phase space for stable oscillations
- matching the shape of the bunch to the bucket is important

Bibliography

- M. Conte, W.W. Mac Kay **An Introduction to the Physics of particle Accelerators**
(World Scientific, 1991)
- P. J. Bryant and K. Johnsen **The Principles of Circular Accelerators and Storage Rings**
(Cambridge University Press, 1993)
- D. A. Edwards, M. J. Syphers **An Introduction to the Physics of High Energy Accelerators**
(J. Wiley & sons, Inc, 1993)
- H. Wiedemann **Particle Accelerator Physics**
(Springer-Verlag, Berlin, 1993)
- M. Reiser **Theory and Design of Charged Particles Beams**
(J. Wiley & sons, 1994)
- A. Chao, M. Tigner **Handbook of Accelerator Physics and Engineering**
(World Scientific 1998)
- K. Wille **The Physics of Particle Accelerators: An Introduction**
(Oxford University Press, 2000)
- E.J.N. Wilson **An introduction to Particle Accelerators**
(Oxford University Press, 2001)



And CERN Accelerator Schools (CAS) Proceedings

Acknowledgements

I would like to thank everyone for the material that I have used.

In particular (hope I don't forget anyone):

- Joël Le Duff (from whom I inherited the course)
- Rende Steerenberg
- Gerald Dugan
- Heiko Damerau
- Werner Pirkl
- Genevieve Tulloue
- Mike Syphers
- Daniel Schulte
- Roberto Corsini
- Roland Garoby
- Luca Bottura