


# Global Review

---


- What did we « learn » ?
- Can we start something with this?
- Some (subjective) personal comments/hints ...



# Project Organisation

- When starting with a new project, you have to make sure that some expertise is available on the following topics:

➤ Lattice Design (TBD)	➤ Magnets
➤ RF (LBD)	➤ Vacuum
➤ Collective Effects (Instabilities)	➤ Power Converters
➤ Beam Instrumentation	➤ Controls, Radiation Safety, ...



# What machine for what Project?

---

- Whatever the project, it is (more than) likely that the choice of your machine will be influenced by:
  - The specific purpose of the machine (SLS, HEP,...).
  - The availability of some already existing facilities (upgrade).
  - The required final energy.

# The final energy

Example: a machine for particle physics

➤ Remember: The center of mass energy  $E_{\text{cm}}$  is given by

(with  $\gamma = E/E_0$ ):


$$E_{\text{cm}} \propto m \cdot (2\gamma + 2)^{1/2} \quad \text{for fixed target}$$

$$E_{\text{cm}} \propto 2m\gamma = 2E \quad \text{for a collider}$$

➤ High energy **not** required → **linacs or cyclotrons** (fixed target)


➤ High energy **required** → **linacs or synchrotrons** (fixed target or collider)

# Linacs and Cyclotrons

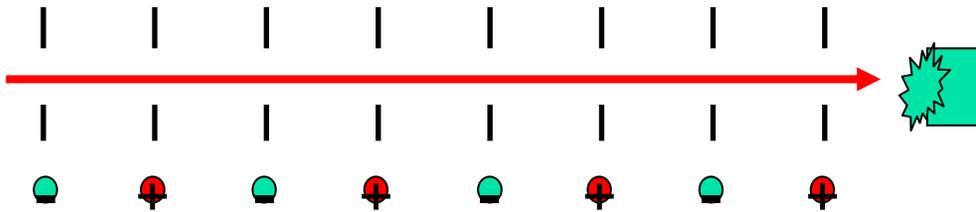


Single pass, high intensities, high energy possible

huge dipole, compact design,  
 $B = \text{constant}$   
single pass and low energy !

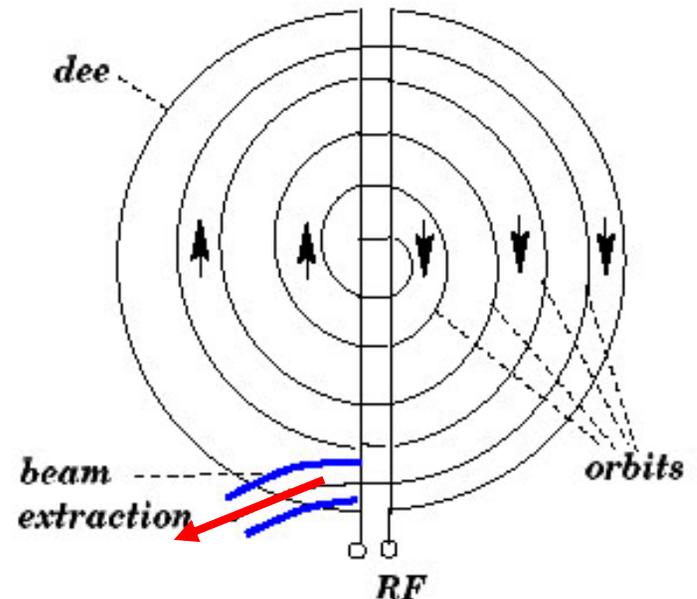

# Synchrotrons ...

## Accelerator chain of CERN (operating or approved projects)

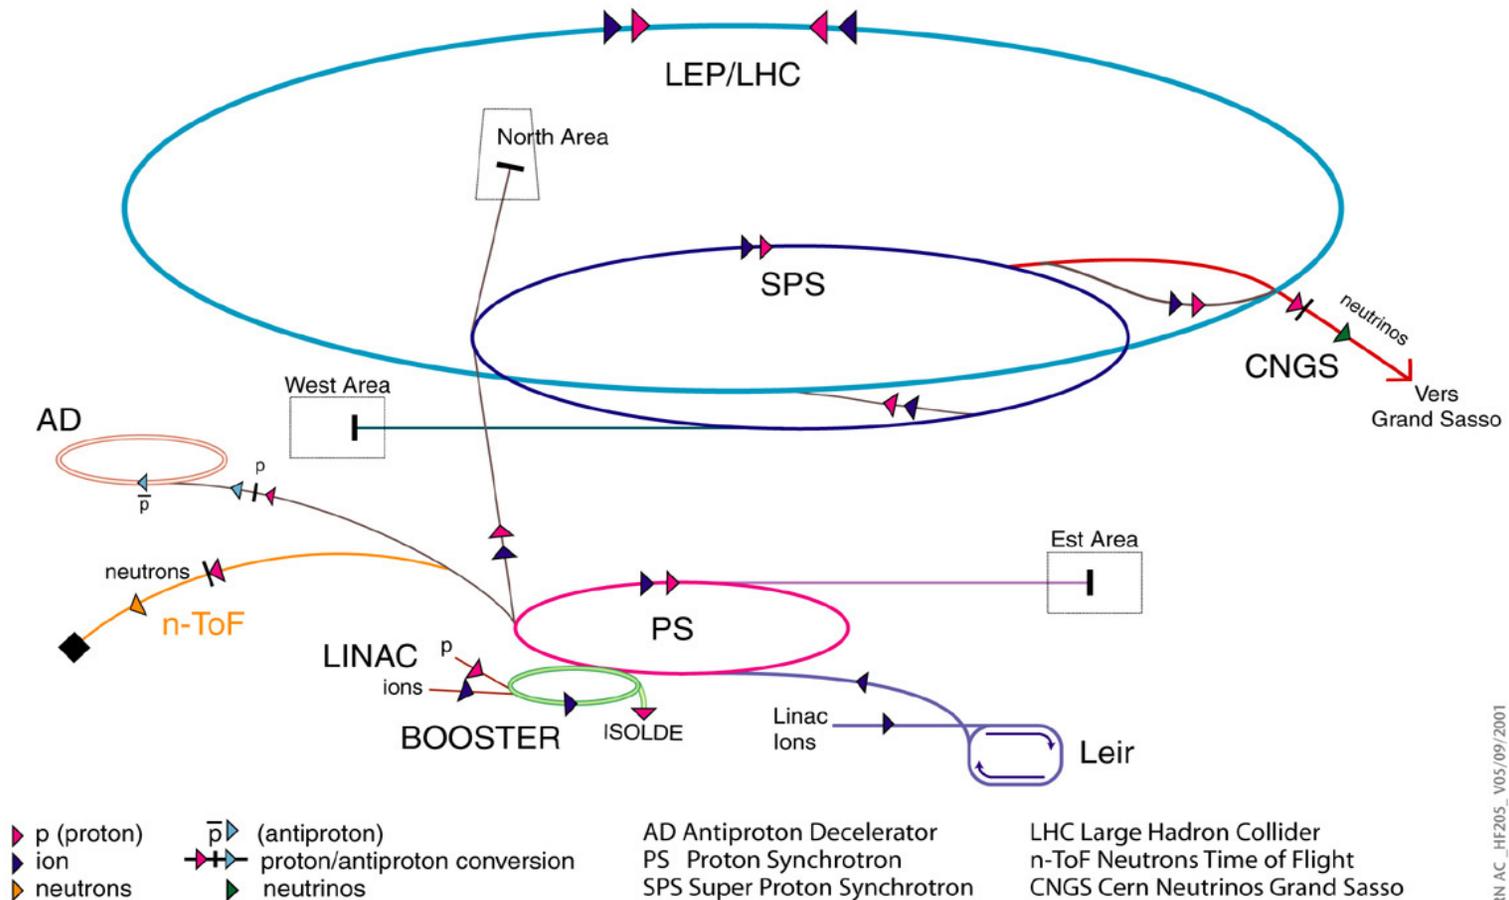

CERN AC\_HF205\_V05/09/2001

# Accelerators in the world (2002)

Basic and Applied Research		Medicine	
High-energy phys.	120	Radiotherapy	7500
S.R. sources	50	Isotope Product.	200
Non-nuclear Res.	1000	Hadron Therapy	20
Industry			
Ion Implanters	7000		
Industrial e- Accel.	1500	<b>Total:</b>	<b>17390</b>

Courtesy: W. Mondelaers JUAS 2004

# Fundamental relation:

At this very early stage, you will have to use the fundamental relation:


$$p = m_0 \cdot c \cdot (\beta\gamma)$$



Magnetic rigidity:

$$B\rho = mv/e = p/e$$

Relation also holds for relativistic case provided the classical momentum  $mv$  is replaced by the relativistic momentum  $p$



# Why fundamental ?

---

Constraints:


**E** and  $\rho$  given  $\Rightarrow$  Magnets defined (**B**)

Constraints:

**E** and **B** given  $\Rightarrow$  Size of the machine ( $\rho$ )

Constraints:

**B** and  $\rho$  given  $\Rightarrow$  Energy defined (**E**)



# Interesting homework:

---

Compute machine parameters for LHC physics with fixed target:


➤ Compute beam energy (momentum) required for equivalent  $E_{\text{cm}}$

Keeping the existing  
LHC tunnel (R fixed)

→  $B = ?$

Keeping the existing  
LHC magnets (B fixed)

→  $R = ?$



# What type of particles?

---


- The choice of the type of particles is intimately linked to the dedicated application. For **high energy circular machines**, **synchrotron radiation** and the available **magnet strength** will be the important parameters. Possible candidates:
  - Electrons and/or positrons (synchrotron radiation in circular machines)
  - Protons (magnet strength)
  - Antiprotons, neutrinos (available intensities)
  - Ions (sources)
  - Muons (future machines)

# Hadrons vs. Leptons (circular machine)

Two extreme cases:

Magnetic rigidity:

$$B\rho = mv/e = p/e$$



LEP (100 GeV):  $B = 0.12 \text{ T}$

LHC (7 TeV):  $B = 8.3 \text{ T}$

Synchrotron radiation losses:


$$eU_0 = A \cdot \gamma^4/\rho$$



LEP (100 GeV):  $U_0 = 3 \text{ GeV}$

LHC (7 TeV):  $U_0 = 0.00001 \text{ GeV}$

Remember: For warm magnets (not SC):  $B \leq 2 \text{ T}$



# End of step 1:

---

So, at this stage, with your **given** boundary conditions and a **single** (simple) **relation**, you already know:

- The type of your machine
- The energy of your machine
- The type of particles
- The size of your machine
- The type of your magnets (SC or conventional)
- ... and the radiation losses

# NB: Size of the real machine

- Required kinetic energy of the beam is known:  $E_{\text{kin}}$
- Available field in the dipoles is given:  $B$  [T]
- Evaluate additional space required for injection, extraction, acceleration, collisions...  $\rightarrow (L_{\text{bend}}/L_{\text{tot}}) = A$


$$(E_{\text{kin}} = 450 \text{ GeV}, B = 1.9 \text{ T}, A = 2/3)$$

- Compute momentum  $p$ :  $p^2 c^2 = (E_{\text{tot}}^2 - E_0^2) : p = 450.93 \text{ GeV}$

- Compute  $\rho$ :  $B\rho = 3.3356 p : \rho = 791.64 \text{ m}$

- Compute  $R$ :  $\rho/A \rightarrow$  Circumference of the machine  $C = 2\pi R$

$$R = 1187.5 \text{ m} \quad C = 7461.2 \text{ m}$$



## Step 2: Choice of the lattice


---

➤ If you are working on a **conventional machine**, then you are very likely to use a standard **FODO lattice**. For the FODO cells, the lectures on « Transverse Dynamics » directly apply.

➤ If your synchrotron has insertions (injection, extraction, RF, low- $\beta$ , experiments), then you will need an « **Optics program** » to **adapt** (match) these **specific regions** to the FODO/periodic cells.

➤ If you are working on a **Synchrotron Light Source** (very small emittance, insertion devices, FELs) you will opt for a special lattice (**CAS Intermediate course**). For such a case, the use of a dedicated « Optics program » is probably unavoidable.

# The phase advance per cell $\mu$

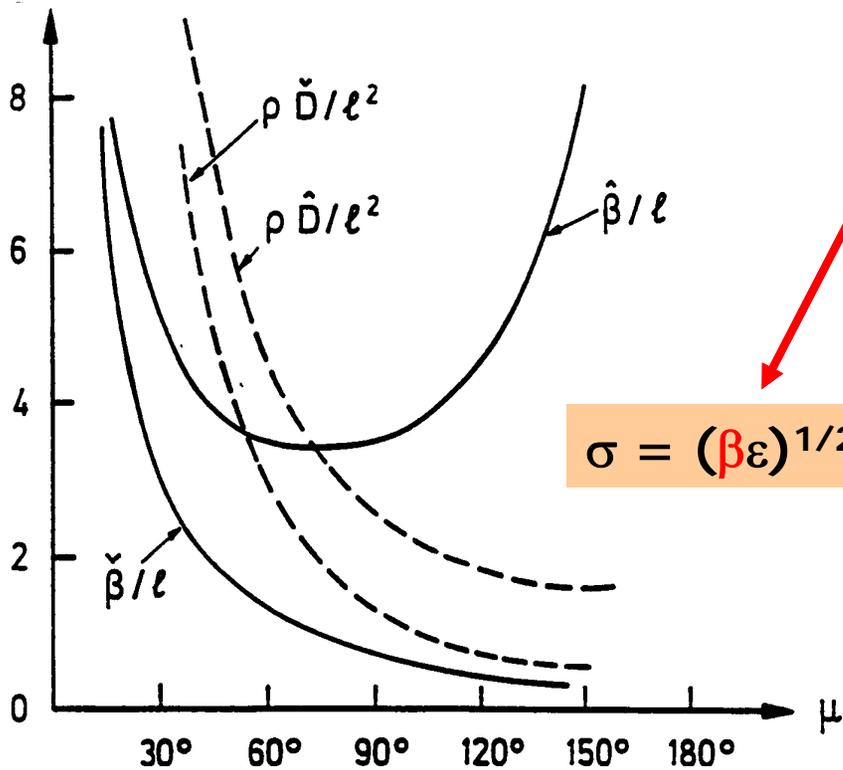

$$\sigma = (\beta \varepsilon)^{1/2}$$

- Aperture expensive  $\rightarrow \mu$  between 60 and 90 degrees.
- Closed orbit correction
- Chromaticity correction with a reasonable number of sextupole families

Some phase advances are advantageous for the lattice design (Intermediate level)

$$60^\circ < \mu < 90^\circ$$

E. Wilson's lecture, CAS Sesimbra 2002

# The Twiss Parameters

Matrix for the FODO cell (mid-F to mid-F):

$$M = \begin{pmatrix} 1 - L^2/2f^2 & 2L(1 + L/2f) \\ (-L/2f^2)(1 - L/2f) & 1 - L^2/2f^2 \end{pmatrix} = \begin{pmatrix} \cos\mu + \alpha \sin\mu & \beta \sin\mu \\ -\gamma \sin\mu & \cos\mu - \alpha \sin\mu \end{pmatrix}$$

$$\cos \mu = 1 - L^2/2f^2$$

$$\sin (\mu/2) = L/2f$$

$$\beta_{\max} = 2L (1 + \sin (\mu/2))/\sin \mu$$

$$\alpha = 0$$


Aperture optimisation:

Start reversed process by defining  $\beta_{\max}$

# More general case ...

- You will need an « Optics program » to compute the lattice of your machine (e.g. MAD-X, more detailed tuition on « Optics design » and how to use the « Optics code » belongs to the **Intermediate level CAS course with a dedicated afternoon course** (10-12 hours)).

Get the correct Optics




- Match your insertions.
- Correct the chromaticity
- Compensate coupling

Predict the performance



- Compute Tunes vs. Momentum
- Perform tracking with errors
- Evaluate the dynamic aperture



# A few useful checks...

---

- Although the « Optics code » will provide you all the required parameters, it is always recommended to perform a few very basic checks (garbage IN, garbage OUT  $\leftrightarrow$  the program does what **YOU** asked it to do).

## Useful checks:

$$\langle \beta \rangle \approx R/Q \qquad \alpha \approx 1/Q^2$$

$$\langle D \rangle = \alpha R \approx R/Q^2 \qquad \gamma_{\text{tr}} \approx Q$$


# Off momentum particles ( $\Delta p/p \neq 0$ )

## Effect from Dipoles

- If  $\Delta p/p > 0$ , particles are **less** bent in the dipoles  $\rightarrow$  should spiral out !
- If  $\Delta p/p < 0$ , particles are **more** bent in the dipoles  $\rightarrow$  should spiral in !


**No!**

There is an equilibrium with the restoring force of the quadrupoles

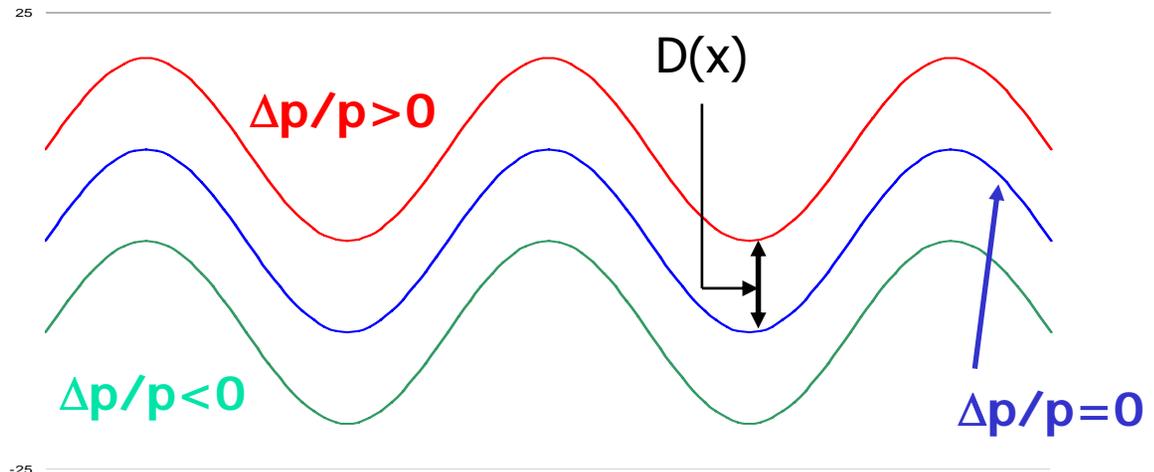

# Dispersion

In general:

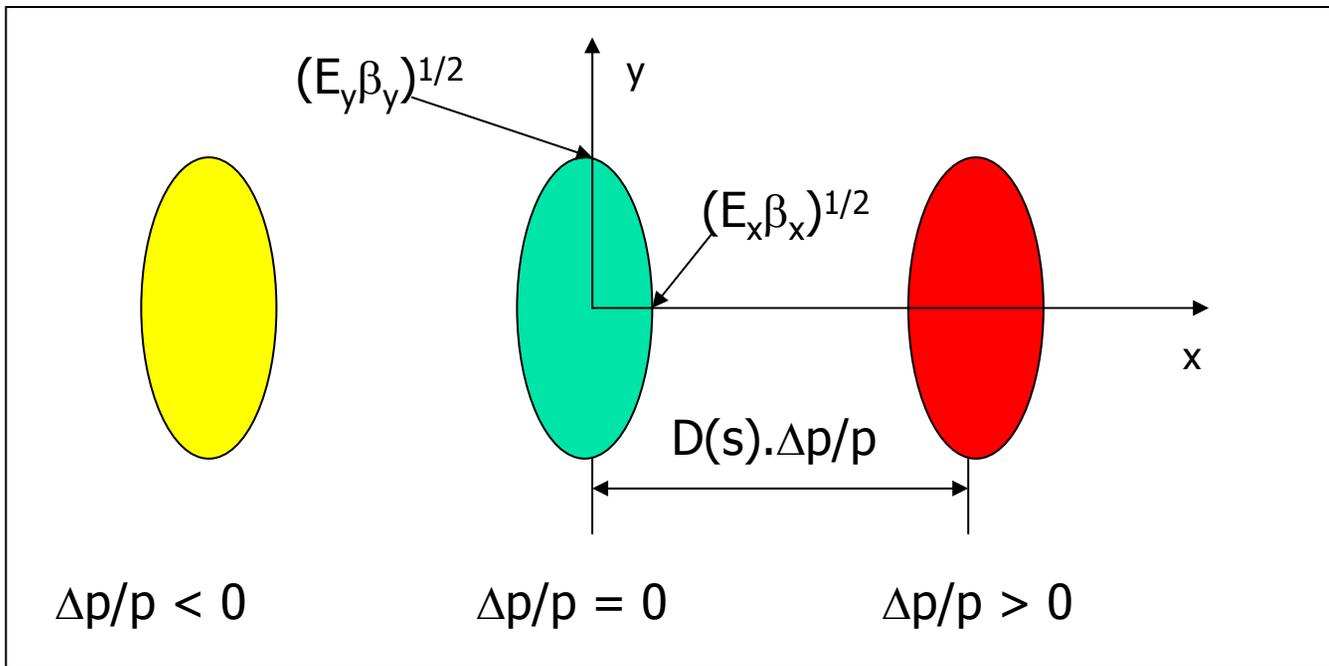


Only extreme values of  $\Delta p/p$  are shown.

The vacuum chamber must accommodate the full width.

VH:  $A_y(s) = (E_y \beta_y(s))^{1/2}$     and    HW:  $A_x(s) = (E_x \beta_x(s))^{1/2} + D(s) \cdot \Delta p/p$

# Aperture

Aperture is a **key parameter** which has to be defined at an early stage!  
It deserves a lot of attention!

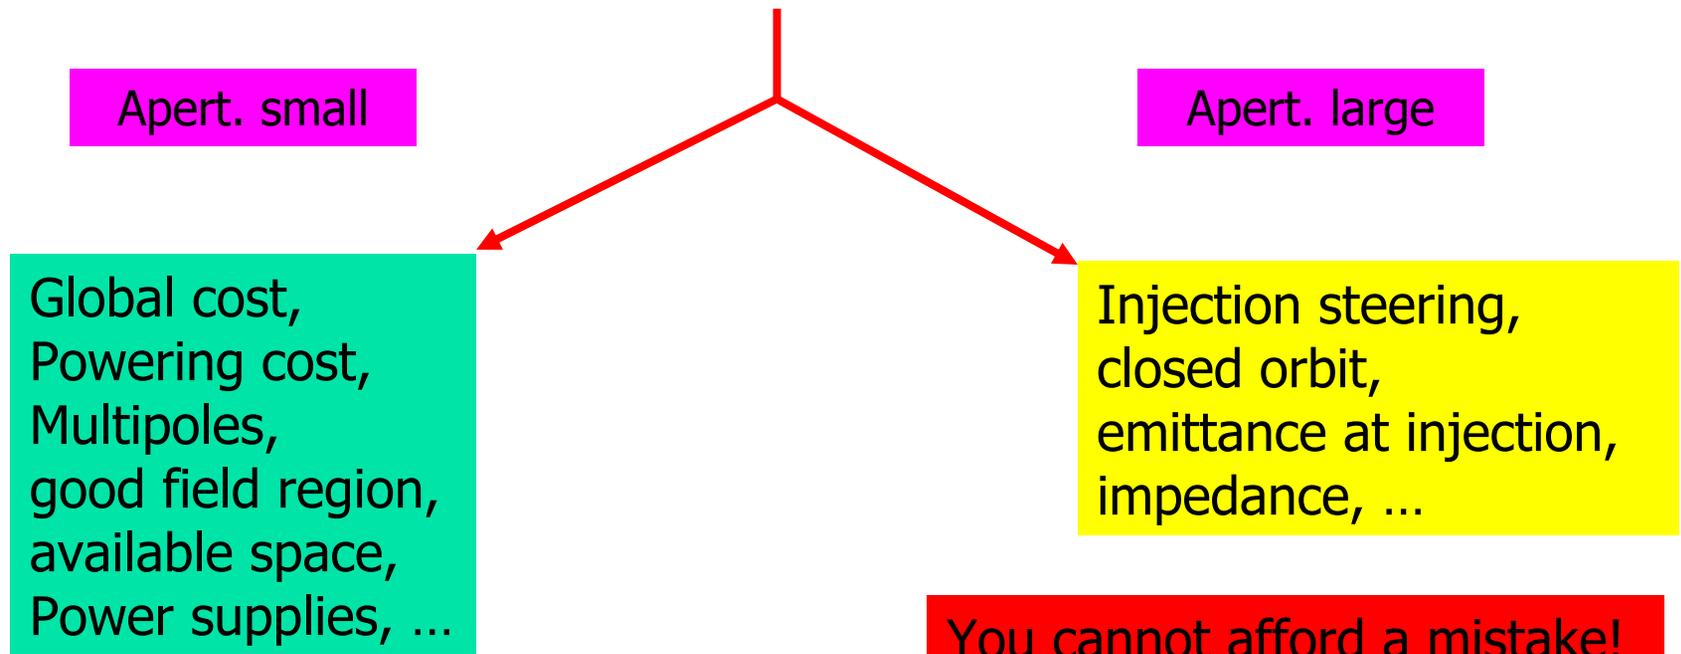



# Off momentum particles ( $\Delta p/p \neq 0$ )

## Effect from Quadrupoles

- If  $\Delta p/p > 0$ , particles are **less** focused in the quadrupoles → **lower Q !**
- If  $\Delta p/p < 0$ , particles are **more** focused in the quadrupoles → **higher Q !**

Particles with **different momenta** would have a **different betatron tune**  $Q=f(\Delta p/p)$ !

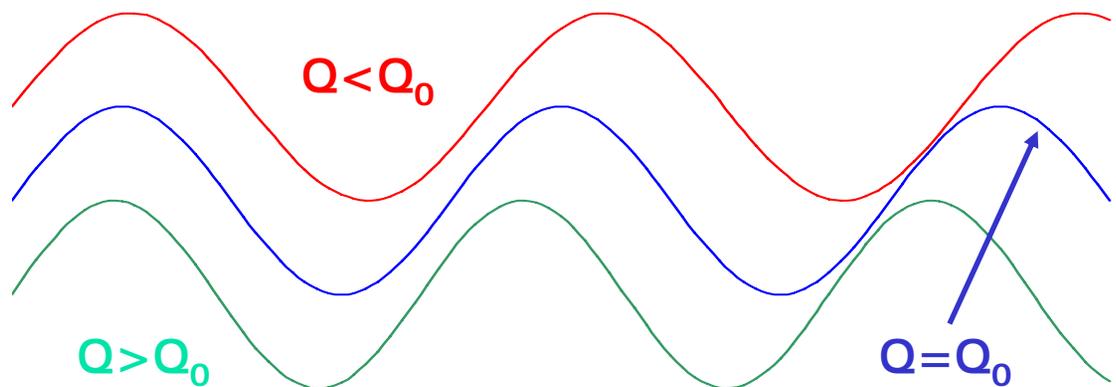




# The chromaticity $Q'$

- The tune dependence on momentum is of **fundamental** importance for the **stability** of the machine. It is described by the **chromaticity** of the machine  $Q'$ :

$$Q' = \Delta Q / (\Delta p/p)$$

- For relativistic particles, the chromaticity **has to be positive** (stability)!
- The **natural chromaticity** of the machine is **negative**!
- The chromaticity **has to be corrected** and kept under control.
- This is achieved by means of **sextupoles**



# Natural chromaticity...

---

- Take a particle and slightly **increase** its momentum:


$$\rightarrow \Delta p/p > 0 \rightarrow \Delta Q < 0 \rightarrow Q' < 0$$

- Take a particle and slightly **decrease** its momentum:

$$\rightarrow \Delta p/p < 0 \rightarrow \Delta Q > 0 \rightarrow Q' < 0$$


**$Q'$  is always negative !**

# The sextupoles (SF and SD)

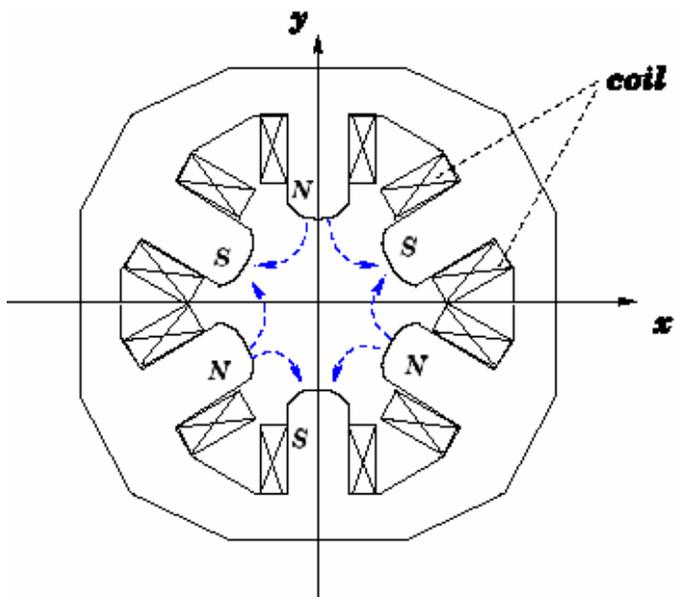

- $\Delta X' \propto X^2$
- A SF sextupole basically « adds » focusing for the particles with  $\Delta p/p > 0$ , and « reduces » it for  $\Delta p/p < 0$ .
- The chromaticity is corrected by adding a sextupole **after each quadrupole** of the FODO lattice.

# Chromaticity correction

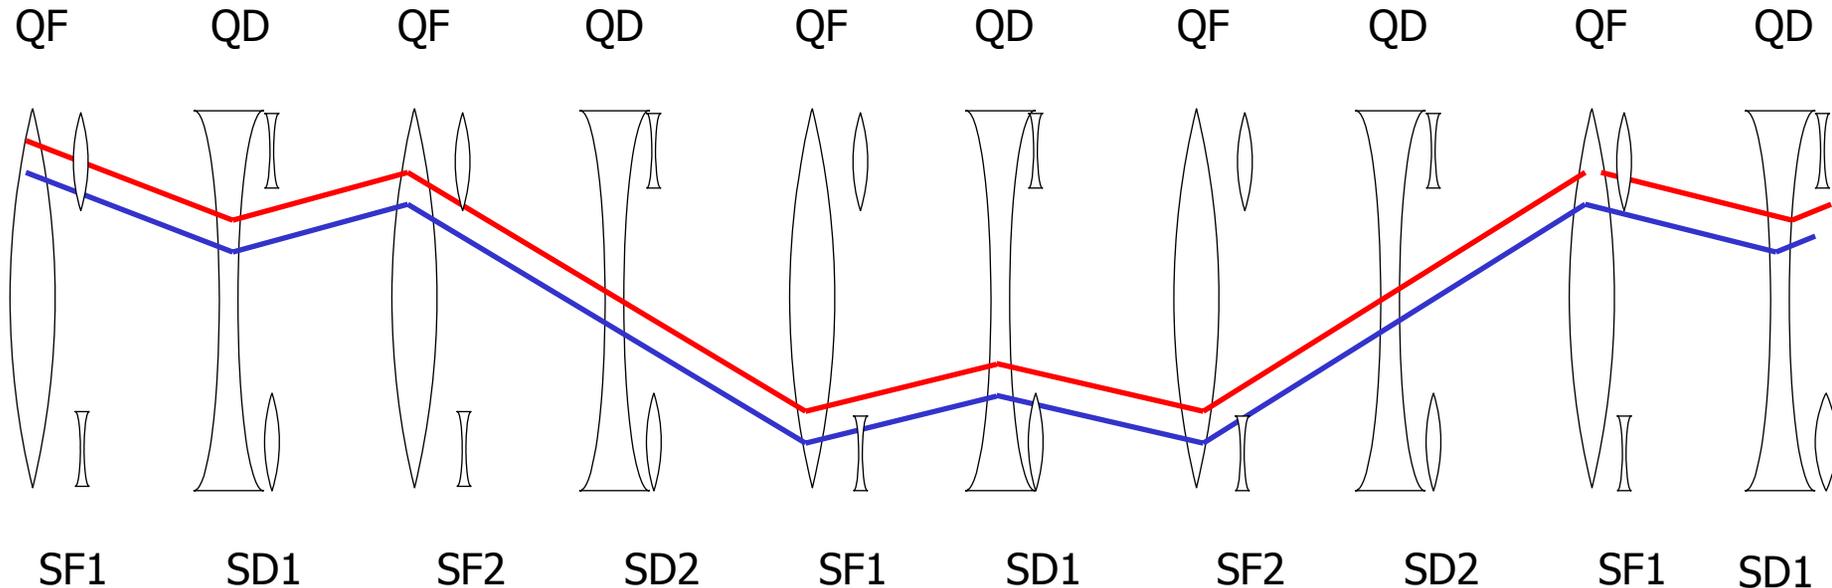


The undesired effect of sextupoles on particles with the **nominal energy** can be avoided by grouping the sextupoles into « families ».

Nr. of families:

$$N = (k * 180^\circ) / \mu = \text{Integer}$$

$$\text{e.g. } 180^\circ / 90^\circ = 2$$

# Tune vs. momentum

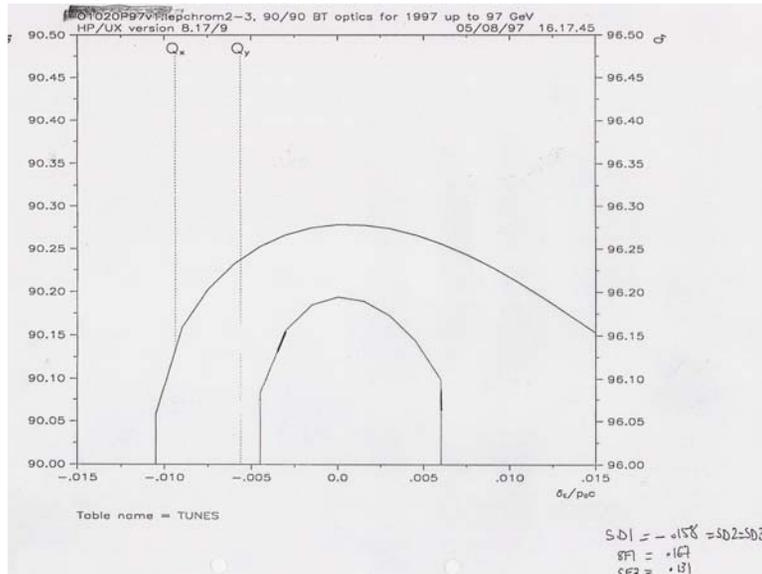

Correction with 1 sextupole family:


**Bad!**

Off momentum particles rapidly cross the integer ( $Q_y$ !).

Correction with 2 sextupole families:

**Excellent!**

Tunes remain almost constant over the whole range of momentum!

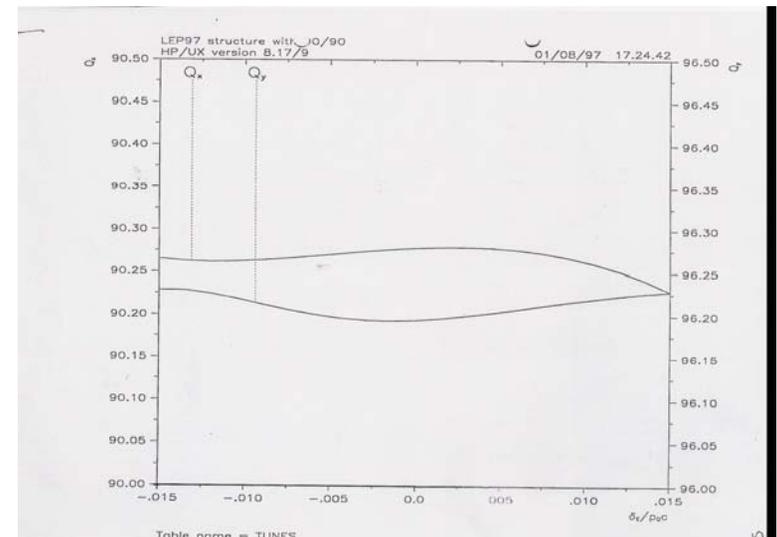

# Step 3: Required RF voltage

➤  $\Delta E_{\text{turn}} = e \rho (\Delta B / \Delta t) C$

→  $V_{\text{min}} = (\Delta E_{\text{turn}}) / e \sin(\phi_s)$

➤  $\Delta E_{\text{turn}} = e V \sin(\phi_s)$

Easier:

Request  $(A_B / A_b) = (\text{Bucket Area} / \text{Bunch Area}) = 2$  →  $V_{\text{max}}$

Easy capture at injection:  $(\Delta E/E)_{\text{beam}} = (\Delta E/E)_{\text{Bucket}}$

# The RF cavities

- If Accelerator chain → try to keep the same frequency.
- Look what is available on the market.
- If cavities too big →  $f_{RF} \uparrow \rightarrow h \uparrow$
- Injection/extraction may impose constraints on the bunch spacing.

$$\beta = pc / E$$

$$f_0 = \beta c / C$$

$$f_{RF} = h \cdot f_0$$

Check  $\gamma_{tr}$  !

$\Delta f / f_{min}$	$f_{RF}$ [MHz]	V [kV/m]	
$> 2$	1 – 10	$\leq 10$	Ferrite, good longit. accept.
$< 0.01$	10 – 100	10 – 50	
$\ll 0.01$	$> 100$	$\gg 50$	Resonators


# 2 elements of the injector chain

Our « test » machine

	E [GeV]	pc [GeV]	$\beta$	fo [kHz]	$\Delta f / f_{\min}$
Injection	26.936	26.92	0.9994	40.156	0.0006
Extraction	450.931	450.93	0.999982	40.180	

A smaller machine in the chain (B=1.5 T, C=228.35 m)


	E [GeV]	pc [GeV]	$\beta$	fo [kHz]	$\Delta f / f_{\min}$
Injection	0.949	0.1453	0.153	200.95	5.5
Extraction	10.938	10.898	0.9963	1308	



# Step 4: Collective effects

---

- Interaction between the particles **within a bunch** (space charge, watch out at injection energy!).
- Interaction between the **bunch and the environment** (impedance-wake).
- Interaction between the **different bunches via the environment** (multi-bunch instabilities)
- There are other collective effects to be considered when the beams are colliding! (**CAS Intermediate course**)
- Taking into account the collective effects at the **design phase** is a relatively new procedure ( $\sim$  LEP). The creation of an “**Impedance Police Team**” proved to be very useful for LEP and **vital for LHC!**




# Procedure:

---

- Expected performance of the machine defined → **required intensities known.**
- Compute maximum longitudinal ( $Z/n$ ) and transverse ( $Z_T$ ) impedances which **allow for these intensities.**
- Make sure your Impedance Police Team has sufficient scientific credit to manage (unavoidable) conflicts with component designers and/or Finance Committee:

Remember:  $Z_T = (2R/b^2) \cdot (Z/n)$  (Broad-band Impedance)

Magnets + Finance want **b** ↓ and Collective Effects want **b** ↑



# The Impedance Police Team

---

- Every single object **visible by the beam** should be submitted for approval to the Impedance Police Team.
- The team evaluates by means of **dedicated programs** the **longitudinal and transverse impedances** of the object.
- The team **approves** or **proposes modifications** for the object.
- Once approved, the object is included in the **Impedance budget** of the machine, which is regularly **updated**.
- For each update, **ALL** the instability thresholds are **re-evaluated**.
- The **time domain** codes yield the corresponding **wakefields** to be used for further multi-particle simulations.
- The **frequency domain** codes yield **BB-impedances** or single **resonant modes** (narrow-band impedances) which will be used to compute **instabilities**, but also **power deposition** in the different elements of the machine (essential for SC machines).


# LHC Beam-Screen (material)

- Without proper Cu-coating of the beam-screen, nominal intensity foreseen for the LHC could not circulate in the machine!



# $|Z/n|$ as a function of time:

Machine	$ Z/n $ [ $\Omega$ ]
PS (~ 1960)	> 50
SPS (~ 1970)	~ 20
LEP (~ 1990)	~ 0.25 (1.0)
LHC (~ 2007)	~ 0.10 (0.25)



# About Impedances...

---

➤ One often refers to  $|Z/n|$  but, please, remember that the impedance is a Complex function !


➤ Values quoted for  $(Z/n)$  are in fact  $|Z/n|$  to be inserted in handy criteria for longitudinal stability (e.g. KS criterion).

The resistive part  $\text{Re}(Z/n)$   
yields  
the instability **growth times**  
related to the impedance

(Damping, Feedback)

The reactive part  $\text{Im}(Z/n)$   
yields  
the **tune shifts**  
caused by the impedance

(Resonances)




# Step 5: Beam Instrumentation

---

➤ We have seen the **basic components** used for beam diagnostics (more detailed tuition belongs to the **Intermediate level CAS course with a dedicated afternoon course** (10-12 hours)).

➤ Once the machine is closed, the instruments available from the beam instrumentation represent the **only possibility to « see » the beam!** Seems obvious but is often forgotten!

➤ Beam Instrumentation is often a good candidate **when costs reductions are envisaged**. **Think twice** before abandoning such instruments (e.g. BPMs).



# Magnets and Power Converters

---


- Errors in Magnets or Power Converters (misalignments, field, current, ripples) can induce severe “distortions” of the closed orbit:

$$x(s) = (\beta_i / \beta(s))^{1/2} / (2 \sin(\pi Q)) \cdot \theta_i \cdot \sin(\phi(s) - \phi_i)$$

$$x'(s) = (\beta_i / \beta(s))^{1/2} / (2 \sin(\pi Q)) \cdot \theta_i \cdot \cos(\phi(s) - \phi_i)$$

- The accuracy and the reproducibility (**specifications**) of these elements is crucial for the performance of the machine.

# Beta function in a real machine

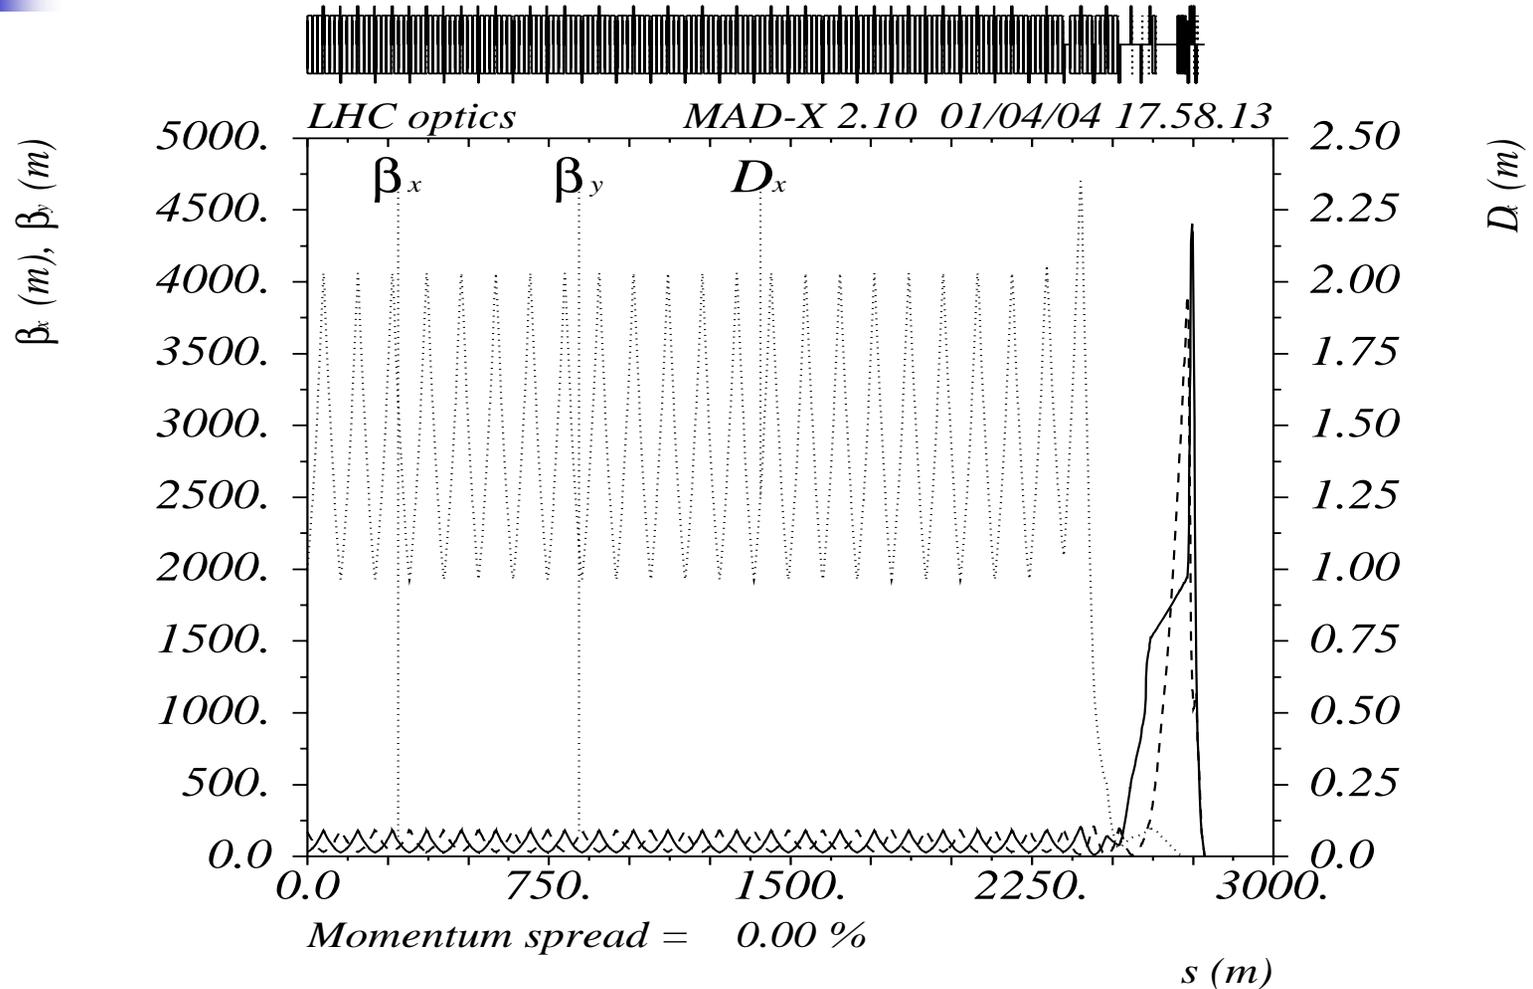


# Step 6: In any case ...

➤ It is essential that everybody knows about the latest status of the Project

➔ regularly updated **Parameter List**.


LHC Parameters for Ultimate Proton Performance Version 3.0 (*)		
Number of experiments	luminosity	
Energy	7 (**)	TeV
Number of particles per bunch	1.67	1011
Number of bunches	2808	
Bunche harmonic number (Trev / bunch-spacing)	3564	
Filling time per ring	4.3	min
Bunch spacing	24.95	ns
Number of long range interactions per experimental insertion	30	
Total number of particles	4.7	1014
DC beam current	0.85	A
Stored energy per beam	531	MJ
Normalized longitudinal emittance at 450 GeV	1	eVs
Normalized longitudinal emittance at 7 TeV GeV (*****)	2.5	eVs
Normalized transverse emittance	75 (*****)	μm
Maximum transverse beam size in the arc at injection (r.m.s.)	1.19	mm
Maximum transverse beam size in the arc at 7 TeV	0.3	mm
Transverse beam size at IP (r.m.s.) at 7 TeV	15.9 (****)	μm
Transverse rms beam divergence at IP (****)	31.7	μrad
Beam beam parameter	5.4	
Total beam beam tune spread	0.015	
Total tune spread (beam-beam + lattice)	0.02	
Beta-function at IP	0.5	m
Luminosity	2.3	34 cm <sup>-2</sup> s <sup>-1</sup>
Events per crossing	44	
Total crossing angle	400	μrad
Minimum beam separation at parasitic crossings	9.3	sigma
Total cross section	100	mbarn
Luminosity lifetime due to 2 high luminosity insertions	13.0 (***)	h



# Step 7: Summary “Introductory”

---

- Relativity, E.M. Theory
- Introduction to Accelerators (types, physics, applications)
- Longitudinal and Transverse Dynamics
- Beam Diagnostics
- Linear Imperfections, Low Order Resonances
- Transfer Lines, Injection and Extraction
- Multi Particle Effects
- Synchrotron Radiation, Electron Dynamics and SLS
- Vacuum, Apertures, Particle Sources
- Computational Methods for Accelerator Physicists




# The next step is ...

---

➤ **The Intermediate Level CAS course**, which is the logical follow-up of the Introductory level:


- The “**core topics**” are re-visited in some more details.
- The “**Afternoon courses**” propose to discover a specific topic and to study it in detail (**Optics Design, Beam Instrumentation, RF**).
- **New topics** are introduced:



# New topics:

---

- |  |                                |
|--|--------------------------------|
| ➤ Plenary talks on the topics retained for the Afternoon courses |                                |
| ➤ Insertions, Special lattices, Non-linearities                  |                                |
| ➤ Lattices for Light Sources, Insertion devices                  |                                |
| ➤ Sources of emittance growth (lifetime)                         |                                |
| ➤ Longitudinal and transverse instabilities                      |                                |
| ➤ Landau damping   | ➤ Dynamics with damping        |
| ➤ Luminosity   | ➤ Beam-beam effects            |
| ➤ RF cavities, Linac structures                                  | ➤ Accelerator Magnet design II |



# CAS in 2007 ...

---

Specialised course on

« DSP »

Digital Signal Processing

Sigtuna, Sweden, 1-9 June 2007

You are more than  
welcome ...

and please let your  
colleagues know !

Accelerator Physics course

« Intermediate level »

Cockcroft Institute

Daresbury, UK, September 2007