

Resonances

- introduction: driven oscillators and resonance condition
- smooth approximation for motion in accelerators
- field imperfections and normalized field errors
- perturbation treatment
- Poincare section
- stabilization via amplitude dependent tune changes
- sextupole perturbation & slow extraction
- chaotic particle motion

Introduction: Damped Harmonic Oscillator

equation of motion for a damped harmonic oscillator:


$$\frac{d^2}{dt^2} w(t) + \omega_0 \cdot Q^{-1} \cdot \frac{d}{dt} w(t) + \omega_0^2 \cdot w(t) = 0$$

Q is the damping coefficient

→ (amplitude decreases with time)

ω_0 is the Eigenfrequency of the HO

example: weight on a spring ($Q = \infty$)



$$\frac{d^2}{dt^2} w(t) + k \cdot w(t) = 0 \quad \rightarrow \quad w(t) = a \cdot \sin(\sqrt{k} \cdot t + \phi_0)$$

Introduction: Driven Oscillators

an external driving force can ‘pump’ energy into the system:

$$\frac{d^2}{dt^2} w(t) + \omega_0 \cdot Q^{-1} \cdot \frac{d}{dt} w(t) + \omega_0^2 \cdot w(t) = \frac{F}{m} \cdot \cos(\omega \cdot t)$$

general solution:

$$w(t) = w_{tr}(t) + w_{st}(t)$$

stationary solution:

$$w_{st}(t) = W(\omega) \cdot \cos[\omega \cdot t - \alpha(\omega)]$$


→ where ‘ ω ’ is the driving angular frequency!
and $W(\omega)$ can become large for certain frequencies!

Introduction: Driven Oscillators

stationary solution

stationary solution follows the frequency of the driving force:


$$w_{st}(t) = W(\omega) \cdot \cos[\omega \cdot t - \alpha(\omega)]$$

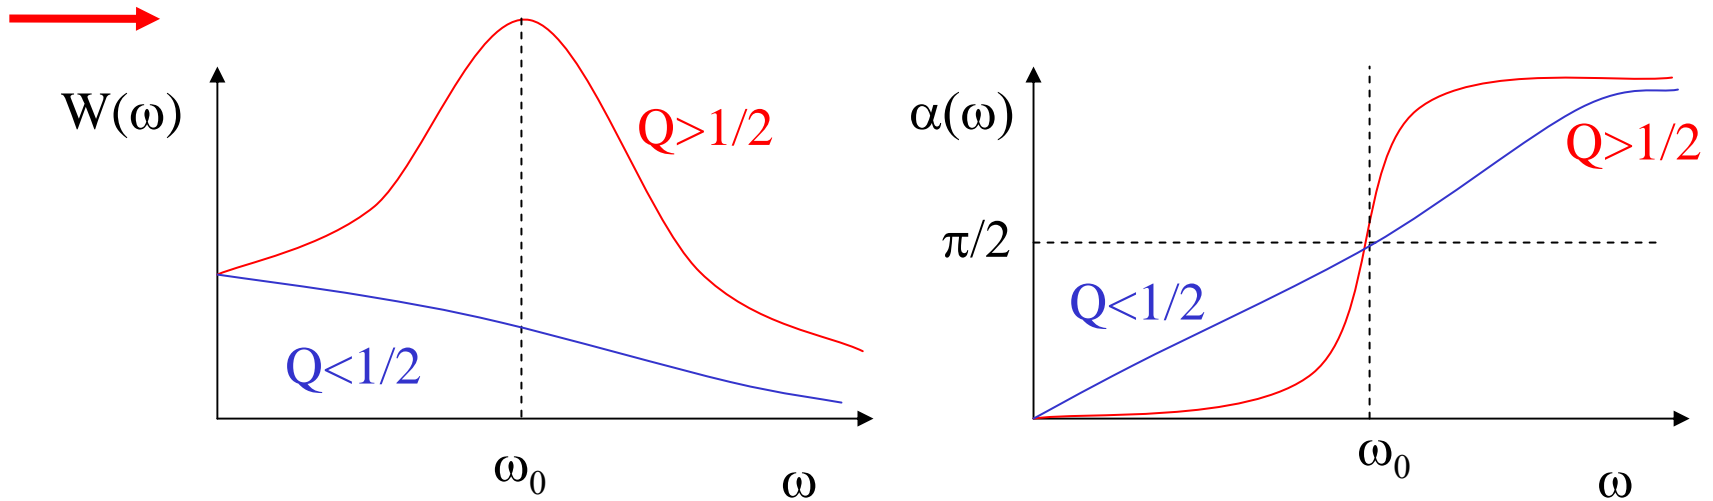

oscillation amplitude can become large for weak damping

Introduction: Pulsed Driven Resonances Example

higher harmonics:

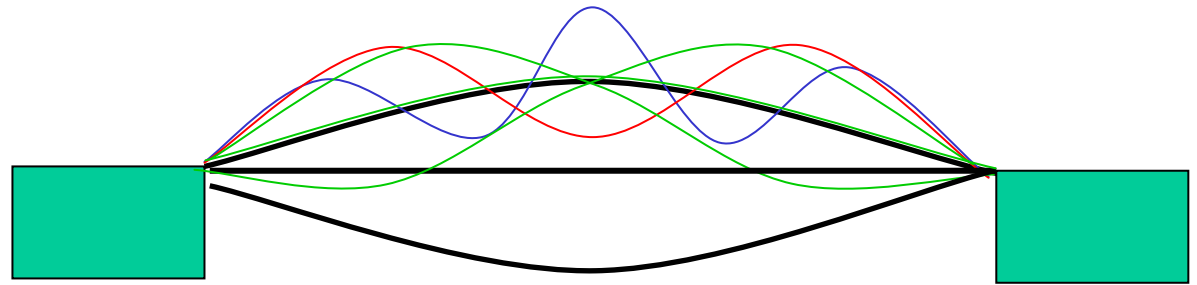

example of a bridge:

[Bob Barrett; Messiah College]

2nd harmonic:

3nd harmonic:

5th harmonic:



peak amplitude depends on the excitation frequency and damping

Introduction: Instabilities

resonance catastrophe without damping:

$$W(\omega) = W(0) \cdot \frac{1}{\sqrt{\left[1 - \left(\frac{\omega}{\omega_0}\right)^2\right]^2 + \left(\frac{\omega}{Q\omega_0}\right)^2}}$$

weak damping: resonance condition: $\omega = \omega_0$


Tacoma Narrow bridge
1940



excitation by strong wind on the Eigenfrequencies

Smooth Approximation: Resonances in Accelerators

■ revolution frequency:

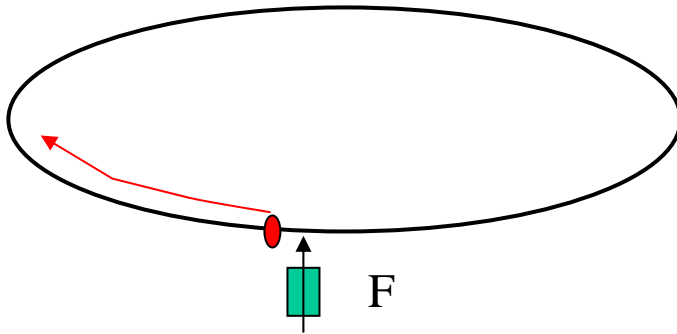


→ periodic kick

→ excitation with f_{rev}

$$(\omega_{\text{rev}} = 2\pi f_{\text{rev}})$$

■ betatron oscillations:

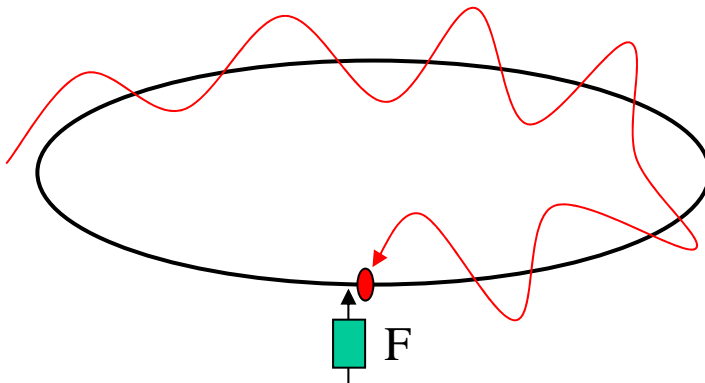

Eigenfrequency: $\omega_0 = 2\pi f_\beta$

$$Q = \omega_0 / \omega_{\text{rev}}$$


→ driven oscillator

→ weak or no damping!

(synchrotron radiation damping (single particle) or Landau damping distributions)

Smooth Approximation: Free Parameter

co-moving coordinate system:

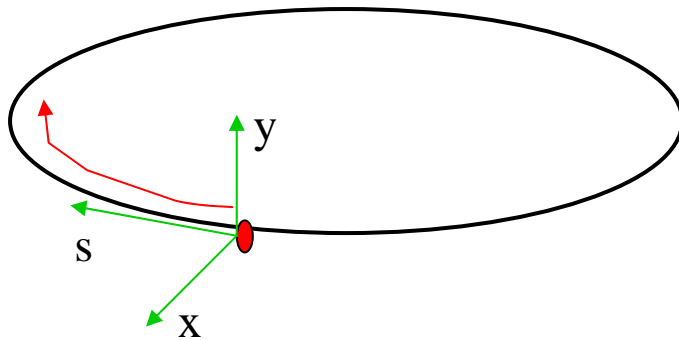

→ choose the longitudinal coordinate as the free parameter for the equations of motion

equations of motion:

$$\frac{d}{dt} = \frac{ds}{dt} \cdot \frac{d}{ds}$$

with:

$$\frac{ds}{dt} = v$$

→
$$\frac{d^2}{dt^2} = v^2 \cdot \frac{d^2}{ds^2}$$

Smooth Approximation: Equation of Motion I

Smooth approximation for Hills equation:

$$\frac{d^2}{ds^2} w(s) + K(s) \cdot w(s) = 0 \xrightarrow{K(s) = \text{const}} \frac{d^2}{ds^2} w(s) + \omega_0^2 \cdot w(s) = 0$$

(constant β -function and phase advance along the storage ring)

$$\longrightarrow w(s) = A \cdot \cos(\omega_0 \cdot s + \phi_0) \qquad \omega_0 = 2\pi \cdot Q_0 / L$$

(Q is the number of oscillations during one revolution)

perturbation of Hills equation:

$$\frac{d^2}{ds^2} w(s) + \omega_0^2 \cdot w(s) = F(w(s), s) / (v \cdot p)$$

in the following the force term will be the Lorenz force of a charged particle in a magnetic field:

$$F = q \cdot \vec{v} \times \vec{B}$$

Field Imperfections: Origins for Perturbations

linear magnet imperfections: derivation from the design dipole and quadrupole fields due to powering and alignment errors

time varying fields: feedback systems (damper) and *wake fields due to collective effects (wall currents)*

non-linear magnets: sextupole magnets for chromaticity correction and octupole magnets for Landau damping

beam-beam interactions: strongly non-linear field!

non-linear magnetic field imperfections: particularly difficult to control for super conducting magnets where the field quality is entirely determined by the coil winding accuracy

Field Imperfections: Localized Perturbation

periodic delta function:

$$\delta_L(s - s_0) = \begin{cases} 1 & \text{for 's' = } s_0 \\ 0 & \text{otherwise} \end{cases} \quad \text{and} \quad \oint \delta_L(s - s_0) ds = 1$$

equation of motion for a single perturbation in the storage ring:

$$\frac{d^2}{ds^2} w(s) + \omega_0^2 \cdot w(s) = \delta_L(s - s_0) \cdot l \cdot F(w, s) / (v \cdot p)$$

Fourier expansion of the periodic delta function:

$$\frac{d^2}{ds^2} w(s) + \omega_0^2 \cdot w(s) = \frac{l}{L} \sum_{r=-\infty}^{\infty} \cos(r \cdot 2\pi \cdot s / L) \cdot F(w, s) / (v \cdot p)$$

→ infinite number of driving frequencies

Field Imperfections: Constant Dipole

normalized field error: $\frac{F}{v \cdot p} = q \cdot \frac{\vec{v} \times \vec{B}}{v \cdot p} \xrightarrow{v \perp B} k_0 = q \cdot B / p$

equation of motion for single kick:

$$\longrightarrow \frac{d^2}{ds^2} w(s) + \omega_0^2 \cdot w(s) = \frac{lk_0}{L} \sum_{r=-\infty}^{\infty} \cos(r \cdot 2\pi \cdot s / L)$$

resonance condition: $\omega_0 = r \cdot 2\pi / L \xrightarrow{\omega_0 = 2\pi \cdot Q_0 / L} Q_0 = r$

avoid integer tunes!

remember the example of a single dipole imperfection from the 'Linear Imperfection' lecture yesterday!

Field Imperfections: Constant Quadrupole

 equations of motion:

$$\frac{d^2}{ds^2} x(s) + \omega_x^2 \cdot x(s) = k_1 \cdot x(s)$$

$$y(s) \equiv 0$$

with: $k_1 = \frac{q}{p} \cdot \frac{\partial B_y}{\partial x}$

→ $\frac{d^2}{ds^2} x(s) + (\omega_x^2 - k_1) \cdot x(s) = 0$

→ change of tune but no amplitude growth due to resonance excitations!

Field Imperfections: Single Quadrupole Perturbation

assume $y = 0$ and $B_x = 0$:

$$F(s)/(v \cdot p) = \delta_L(s - s_0) \cdot l \cdot k_1 \cdot x$$

$$\longrightarrow \frac{d^2}{ds^2} x(s) + \omega_{x,0}^2 \cdot x(s) = \frac{lk_1}{L} \sum_{r=-\infty}^{\infty} \cos(2\pi \cdot r \cdot s / L) \cdot x(s)$$

resonance condition: $\omega_{x,0} = r \cdot 2\pi / L \pm \omega_{x,0} \xrightarrow{\omega_0 = 2\pi \cdot Q_0 / L} Q_0 = n / 2$

avoid half integer tunes plus resonance width from tune modulation!

exact solution: variation of constants or MAP approach

→ see the lecture yesterday

Field Imperfections: Time Varying Dipole Perturbation

time varying perturbation:

$$F(t) = F_0 \cdot \cos(\omega_{kick} \cdot t) \xrightarrow{t \rightarrow s} F_0 \cdot \cos\left(2\pi \cdot \frac{\omega_{kick}}{\omega_{rev}} \cdot s / L\right) / (v \cdot p)$$

$$\frac{d^2}{ds^2} w(s) + \omega_0^2 \cdot w(s) = \frac{lF_0}{2L} \sum_{r=-\infty}^{\infty} \cos\left(2\pi \cdot \left[r \pm \frac{\omega_{kick}}{\omega_{rev}}\right] \cdot s / L\right) / (v \cdot p)$$

resonance condition:


$$\omega_0 = 2\pi \cdot \left(r \pm \frac{\omega_{kick}}{\omega_{rev}}\right) / L \xrightarrow{\omega_0 = 2\pi \cdot Q_0 / L} f_{kick} = f_{rev} \cdot (Q_0 \pm r)$$

avoid excitation on the betatron frequency!


(the integer multiple of the revolution frequency corresponds to the modes of the bridge in the introduction example)

Field Imperfections: Several Bunches

 $F(t) = B \cdot \cos(\omega_{kick} \cdot t); \omega_{kick} \approx \omega_{rev} :$

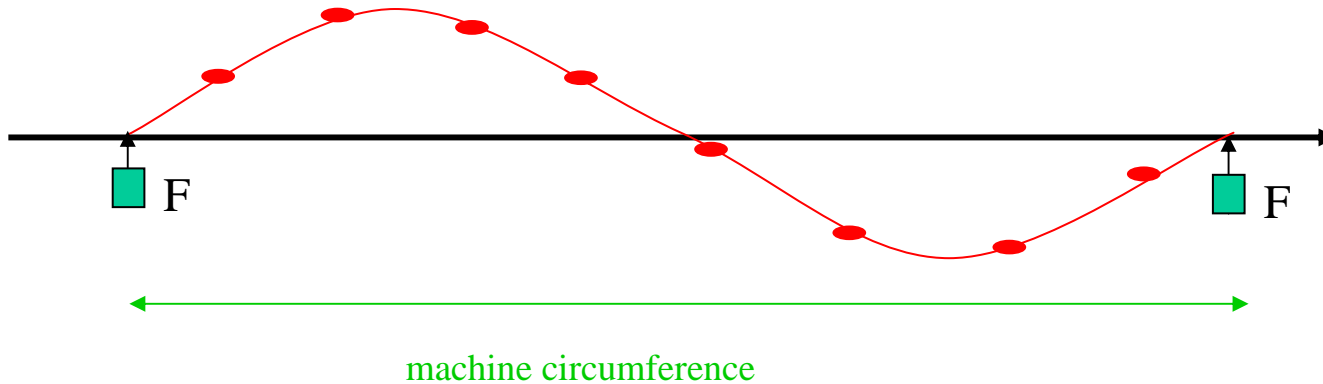

 $F(t) = B \cdot \cos(\omega_{kick} \cdot t); \omega_{kick} \approx 2 \cdot \omega_{rev} :$

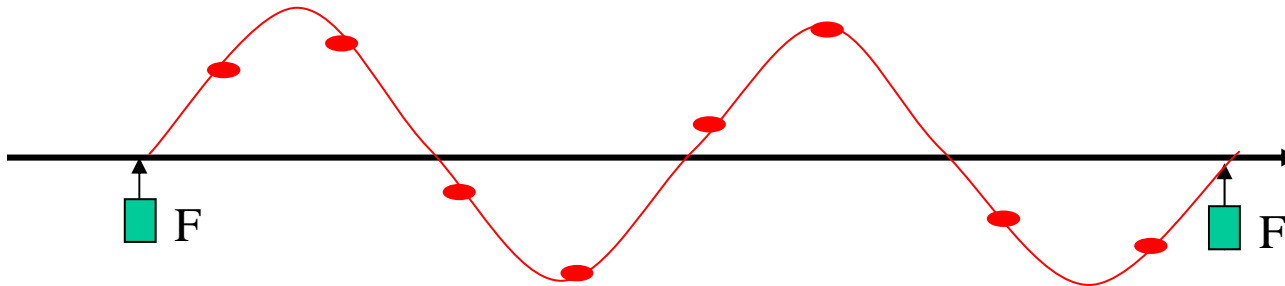


 higher modes analogous to bridge illustration

Field Imperfections: Dipole Magnets

dipole magnet designs:


LEP dipole magnet:

conventional magnet design
relying on pole face accuracy
of a Ferromagnetic Yoke

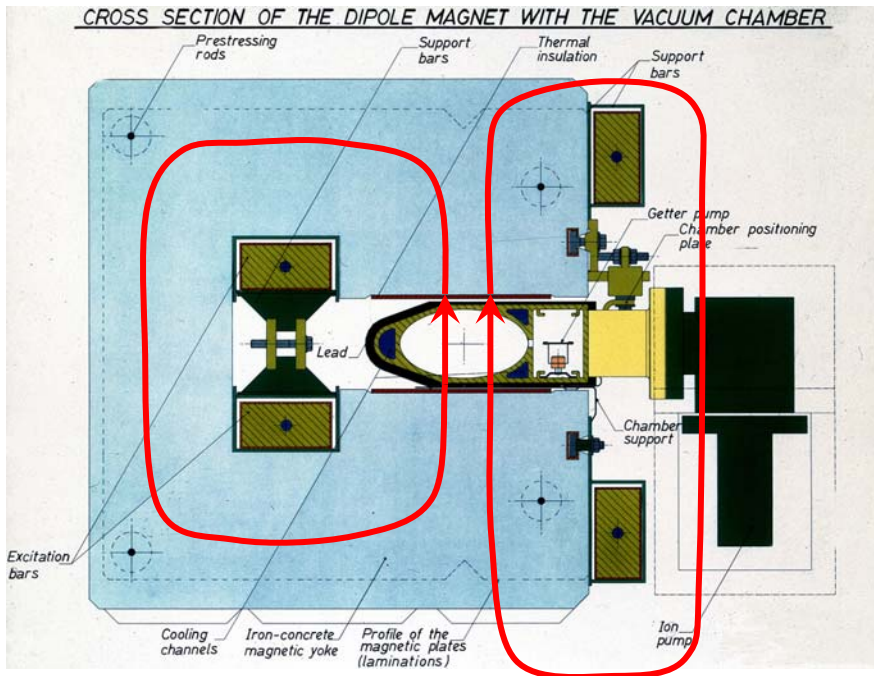

LHC dipole magnet:



air coil magnet design relying
on precise current distribution

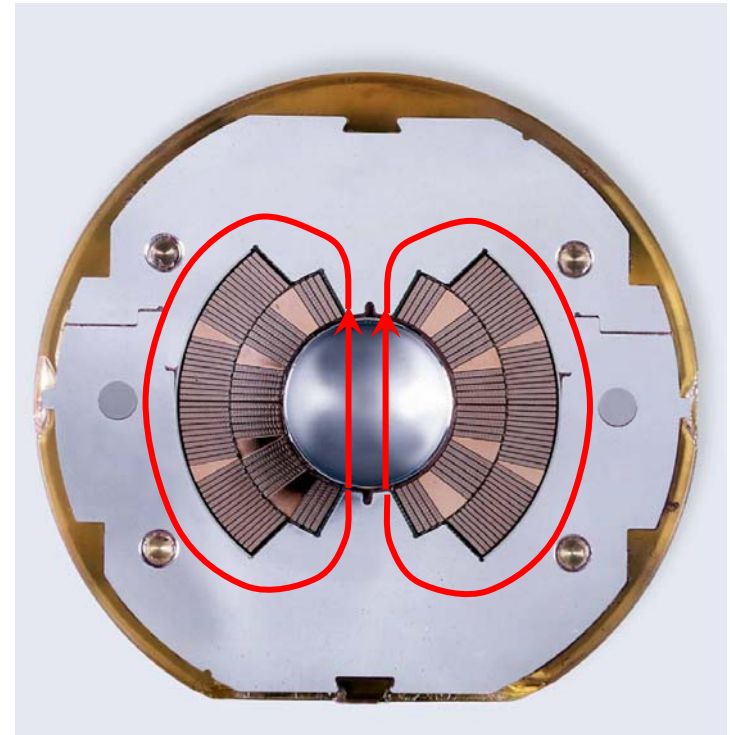

Field Imperfections: Super Conducting Magnets

time varying field errors in super conducting magnets

Luca Bottura CERN, AT-MAS

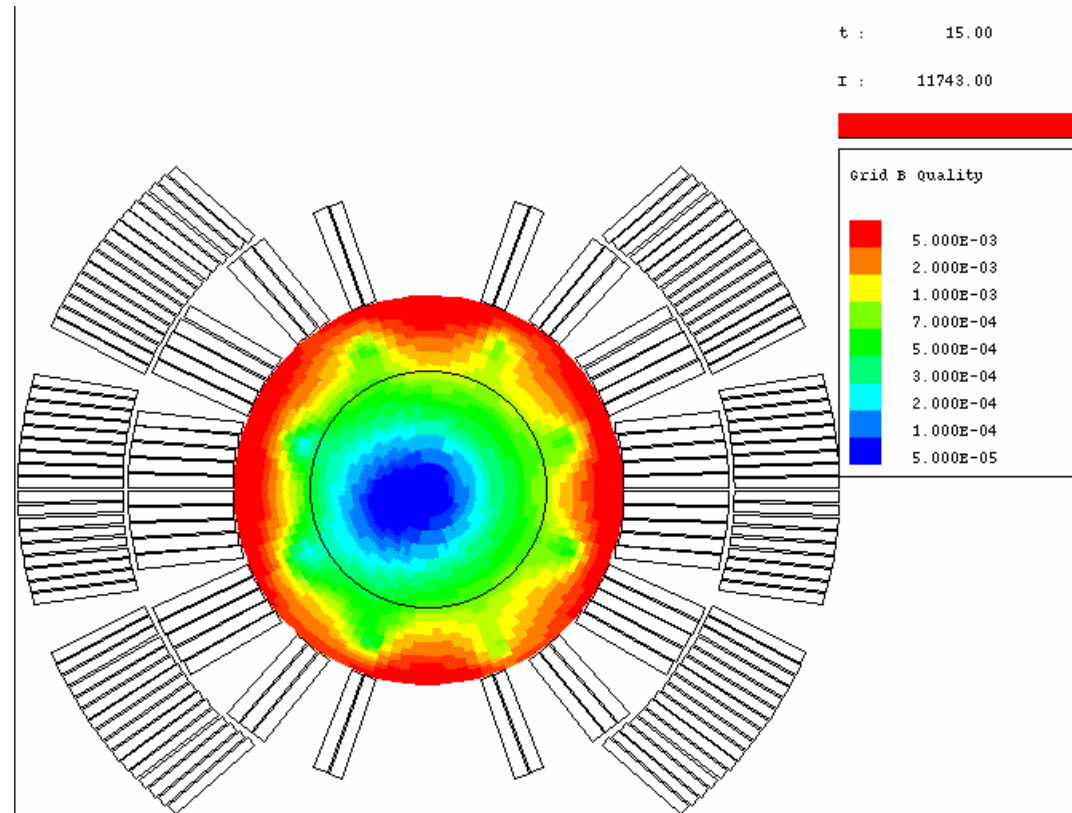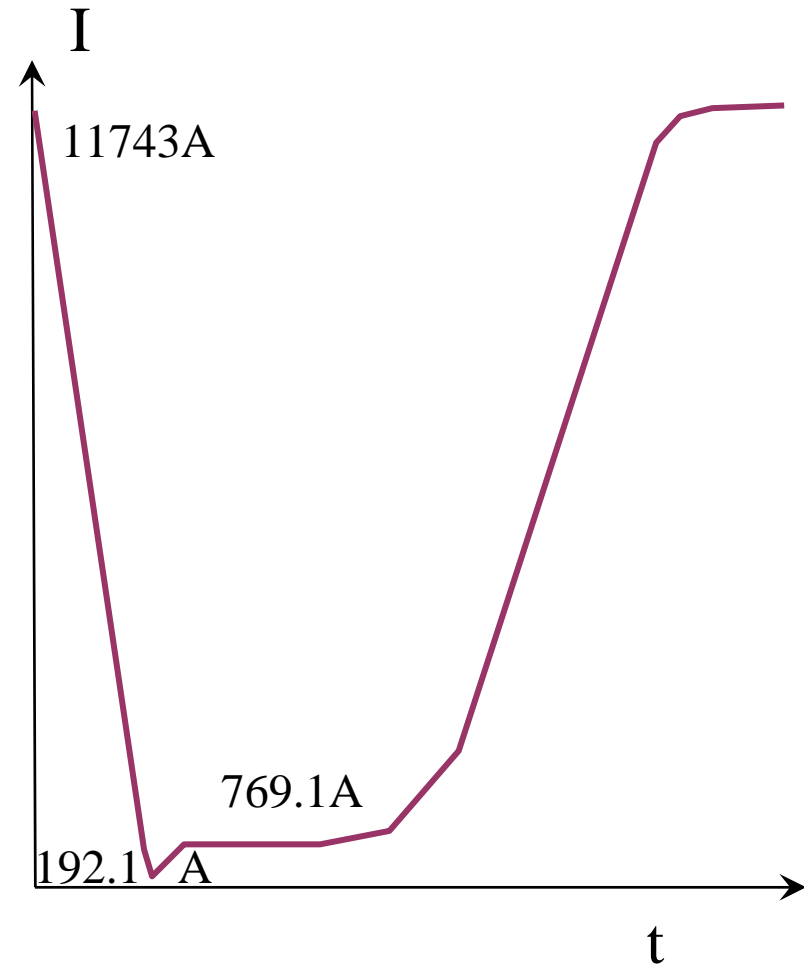

Field Imperfections: Multipole Expansion

Taylor expansion of the magnetic field:

$$B_y + iB_x = \sum_{n=0}^{\infty} \frac{1}{n!} \cdot f_n \cdot (x + iy)^n \quad \text{with:} \quad f_n = \frac{\partial^{n+1} B_y}{\partial x^{n+1}}$$

multipole	order	B_x	B_y
dipole	0	0	B_0
quadrupole	1	$f_1 \cdot y$	$f_1 \cdot x$
sextupole	2	$f_2 \cdot x \cdot y$	$\frac{1}{2} \cdot f_2 \cdot (x^2 \cdot y^2)$
octupole	3	$\frac{1}{6} \cdot f_3 \cdot (3yx^2 - y^3)$	$\frac{1}{6} \cdot f_3 \cdot (x^3 - 3xy^2)$

normalized multipole gradients:


$$F(s)/(v \cdot p) = \frac{q \cdot (\vec{v} \times \vec{B})}{(v \cdot p)} \quad k_n = \frac{q}{p} \cdot f_n \quad k_n = 0.3 \cdot \frac{f_n [T / m^n]}{p [GeV / c]} \quad [k_n] = \frac{1}{m^{n+1}}$$

Field Imperfections: Multipole Illustration


 upright and skew field errors

upright:


$n=0$






$n=1$

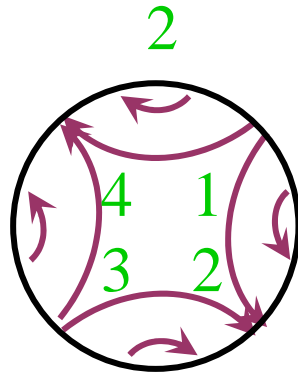

$n=2$



skew:




Field Imperfections: Multipole Illustrations

quadrupole and sextupole magnets



ISR quadrupole

LEP Sextupole

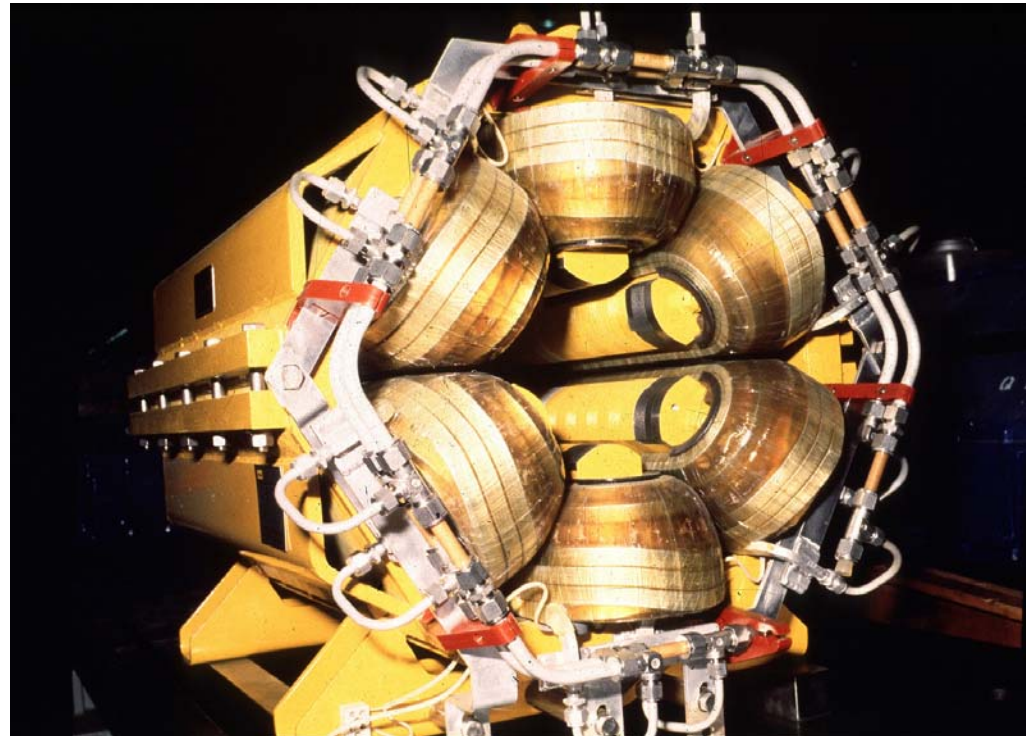

Perturbation Treatment: Resonance Condition

equations of motion:

(n^{th} order Polynomial in x and y for n^{th} order multipole)

$$\frac{d^2}{ds^2} w(s) + \omega_0^2 \cdot w(s) = \varepsilon \cdot \sum_{\substack{l+m < n, \\ r}} a_{n,m,r} \cdot x^l \cdot y^m \cdot \cos(2\pi \cdot r \cdot s / L)$$

with: $w = x, y$

perturbation treatment:

$$x = x_0 + \varepsilon \cdot x_1 + \varepsilon^2 \cdot x_2 + \dots + O(\varepsilon^n)$$

$$\omega_0 = \frac{2\pi}{L} Q_{x,y}$$

with: $x_0(s) = x_0 \cdot \cos(2\pi \cdot Q_{x,0} \cdot s / L + \phi_{x,0})$ [same for 'y(s)']

→

$$\frac{d^2}{ds^2} w_1 + \omega_0^2 \cdot w_1 = \varepsilon \sum_{\tilde{l} < l, \tilde{m} < m} a_{\tilde{n}, \tilde{m}, r} \cos\left(\frac{2\pi}{L} \cdot [\tilde{l} Q_{x,0} + \tilde{m} Q_{y,0} + r] \cdot s\right)$$

Perturbation Treatment: Tune Diagram I

resonance condition:

$$\frac{2\pi}{L} \cdot (\tilde{l} \cdot Q_x + \tilde{m} \cdot Q_y + r) = \frac{2\pi}{L} \cdot Q_{x,y}$$


→ $l \cdot Q_x + m \cdot Q_y = r$

avoid rational tune values!

tune diagram:

up to 11 order ($p+1 < 12$)

→ there are resonances everywhere!
(the rational numbers lie dens within the real number)

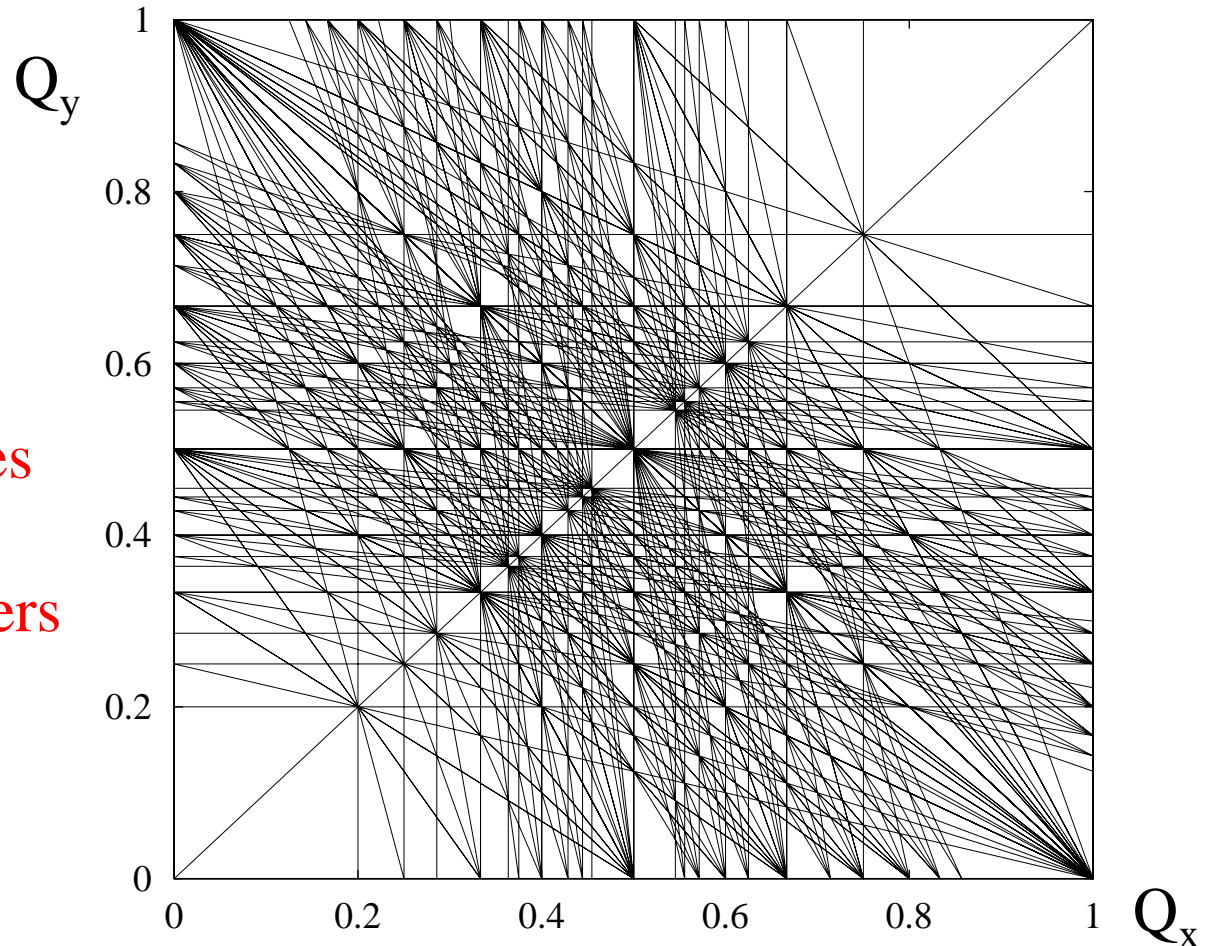



Perturbation Treatment: Tune Diagram II

 regions with few resonances:

$$l \cdot Q_x + m \cdot Q_y = r$$


avoid low order resonances!

 $< 12^{\text{th}}$ order for a proton beam without damping

 $< 3^{\text{rd}} \Leftrightarrow 5^{\text{th}}$ order for electron beams with damping

 coupling resonance:

regions without low order resonances are relatively small!

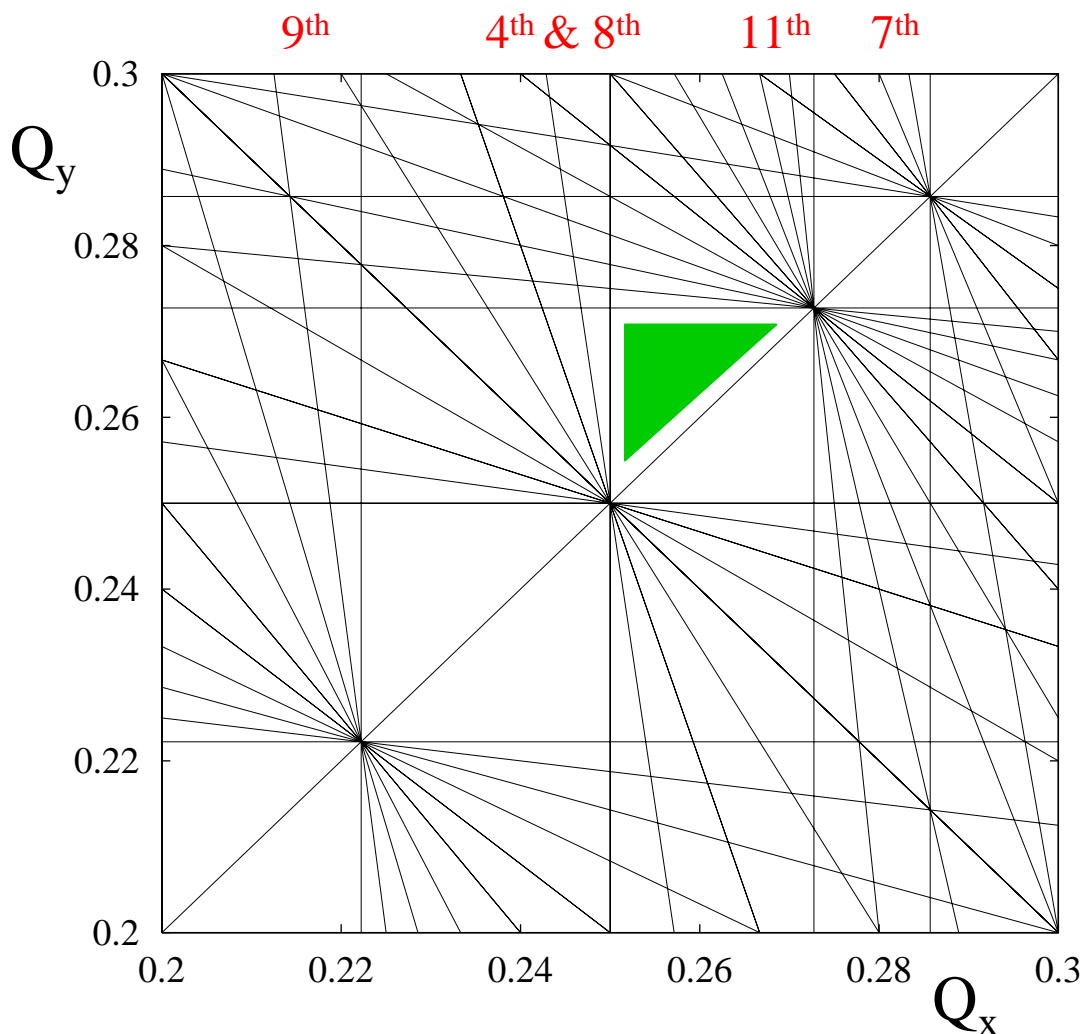

Perturbation Treatment: Single Sextupole Perturbation

■ perturbed equations of motion: $F(s)/(v \cdot p) = \frac{1}{2} \cdot \delta_L(s - s_0) \cdot lk_2 \cdot x^2$

$$\rightarrow \frac{d^2}{ds^2} x_1(s) + \omega_0^2 \cdot x_1(s) = \frac{1}{2} \cdot lk_2 \cdot x_0^2 \cdot \frac{1}{L} \sum_{r=-\infty}^{\infty} \cos(2\pi \cdot r \cdot s / L)$$

with: $x_0(s) = A \cdot \cos(\omega_{0,x} \cdot s + \phi_0)$ and $\omega_{0,x} = 2\pi \cdot Q_{x,0} / L$

$$\begin{aligned} \rightarrow \frac{d^2}{ds^2} x_1(s) + (2\pi Q_{x,0} / L)^2 \cdot x_1(s) &= \frac{lk_1}{2L} \cdot A^2 \cdot \sum_{r=-\infty}^{\infty} \cos(2\pi \cdot r \cdot s / L) \\ &+ \frac{lk_1}{8L} \cdot A^2 \cdot \sum_{r=-\infty}^{\infty} \cos(2\pi \cdot [r \pm 2Q_{x,0}] \cdot s / L) \end{aligned}$$

Perturbation Treatment: Sextupole Perturbation

resonance conditions:

$$\longrightarrow 2\pi Q_{x,0} = 2\pi \cdot (r) \longrightarrow Q_{x,0} = r$$

$$2\pi Q_{x,0} = 2\pi \cdot (r \pm 2Q_{x,0}) \xrightarrow{r-2Q_{x,0}} Q_{x,0} = r/3$$
$$\xrightarrow{r+2Q_{x,0}} Q_{x,0} = r$$

→

avoid integer and r/3 tunes!

perturbation treatment:

contrary to the previous examples no exact solution exist!

this is a consequence of the non-linear perturbation
(remember the 3 body problem?)

→ graphic tools for analyzing the particle motion

Poincare Section: Linear Motion

unperturbed solution:

$$x(s) = \sqrt{R} \cdot \cos(\phi) \quad \text{with} \quad \frac{d}{ds} \phi = \omega_0$$


$$x' = \frac{d}{ds} x = -\sqrt{R} \cdot \omega_0 \cdot \sin(\phi)$$

phase space portrait:

→ the motion lies on an ellipse


→ linear motion is described by a simple rotation

→ consecutive intersections lie on closed curves

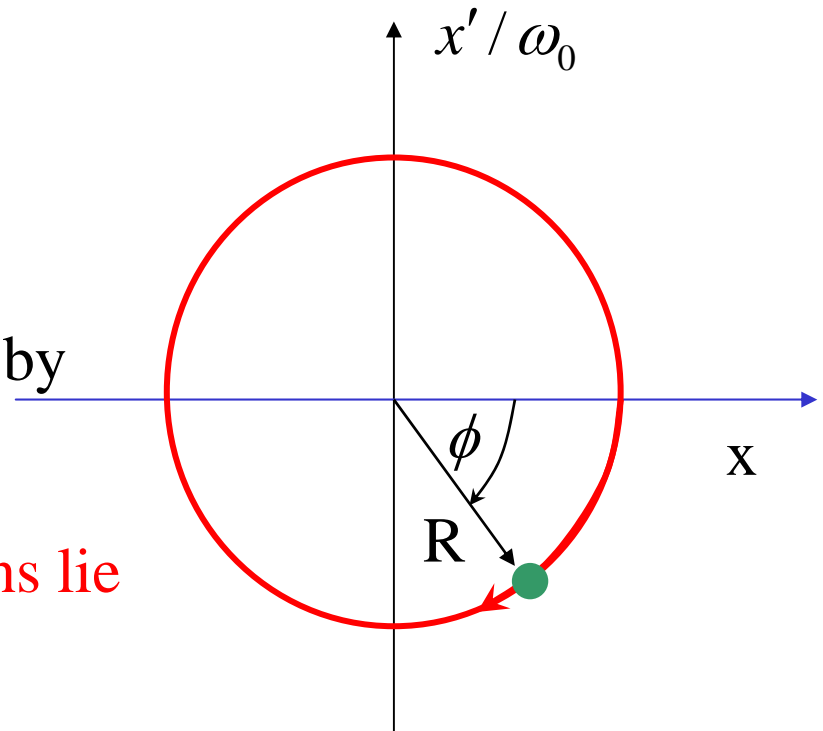

Poincare Section: Definition

Poincare Section:

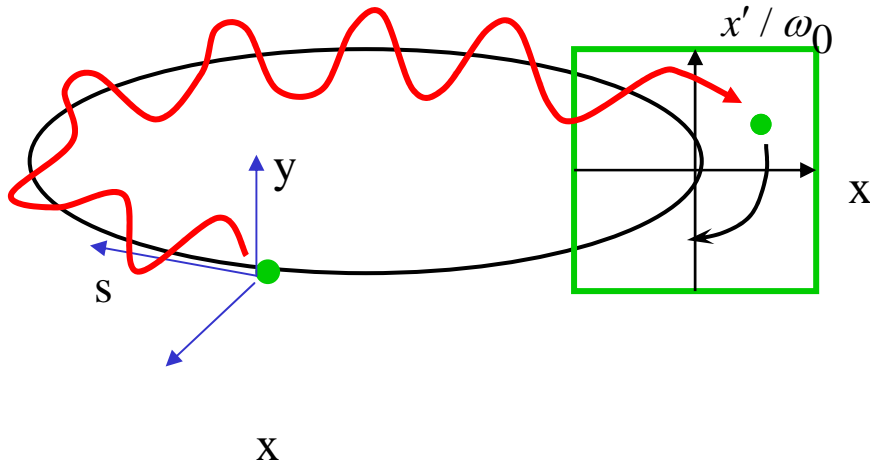


→ record the particle coordinates at one location in the storage ring

resonance in the Poincare section:

→ $\Delta\phi_{turn} = 2\pi \cdot Q$

fixed point condition: $Q = n/r$

points are mapped onto themselves after 'r' turns

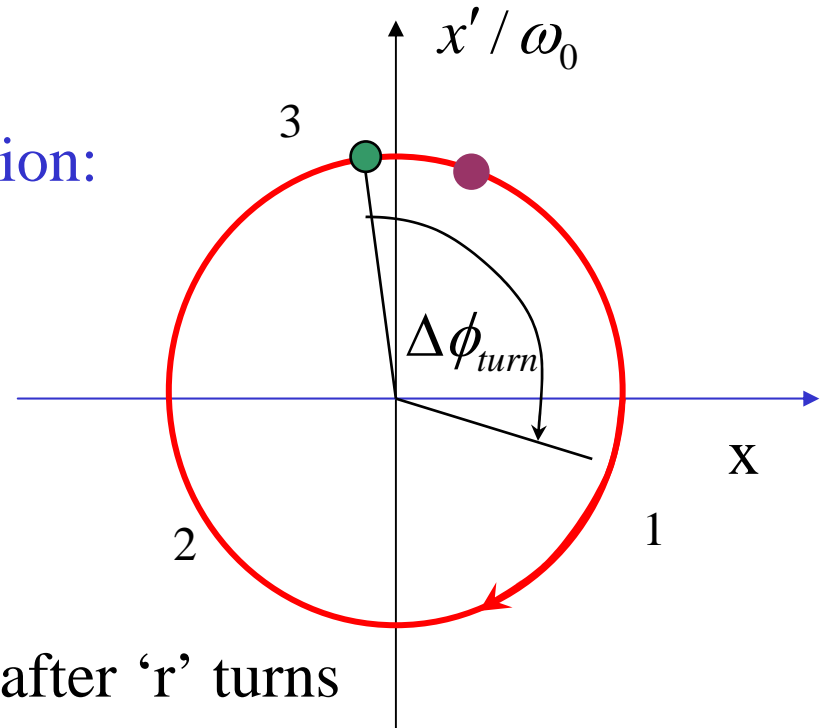

Poincare Section: Non-Linear Motion

momentum change due to perturbation:

$$\Delta x' = \oint \frac{F(s)}{v \cdot p} \cdot ds$$

single n-pole kick:


$$\Delta x' = \frac{1}{n!} \cdot lk_n \cdot x^n$$

phase space portrait with single sextupole:

→
$$\Delta x' = \frac{1}{2} \cdot lk_2 \cdot x^2$$

→ sextupole kick changes the amplitude and the phase advance per turn!

$$\Delta Q_{turn} \propto x^2$$

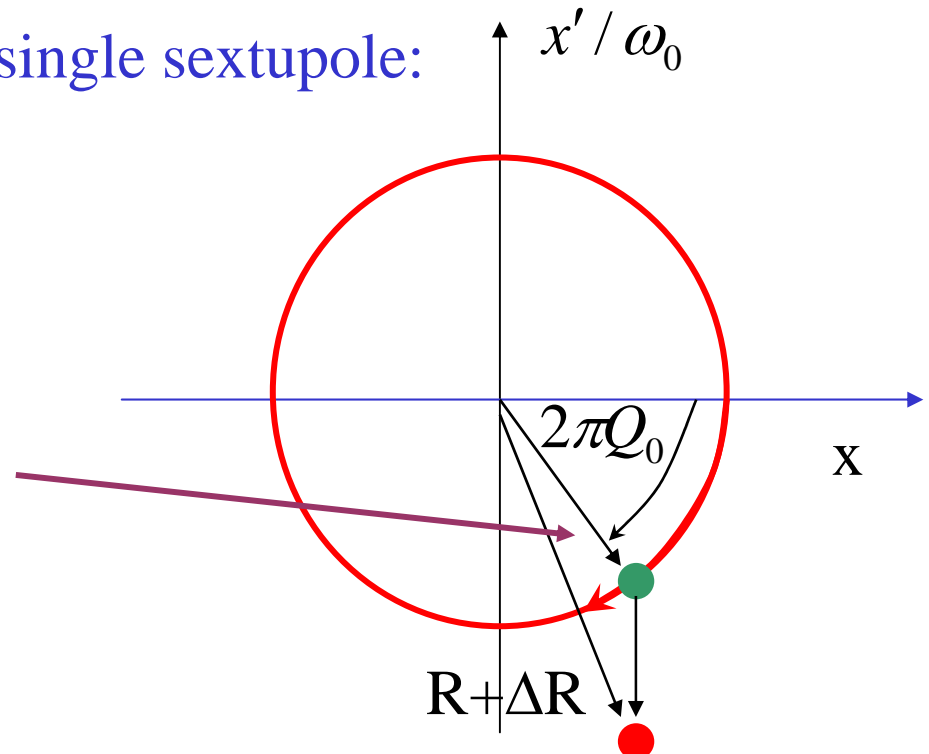

Poincare Section: Stability?

instability can be fixed by ‘detuning’:

→ overall stability depends on the balance between amplitude increase per turn and tune change per turn:

$\Delta Q_{turn}(x)$ → motion moves eventually off resonance


$\Delta R_{turn}(x)$ → motion becomes unstable

sextupole kick:

amplitudes increases faster then the tune can change

→ overall instability!


Poincare Section: Illustration of Topology

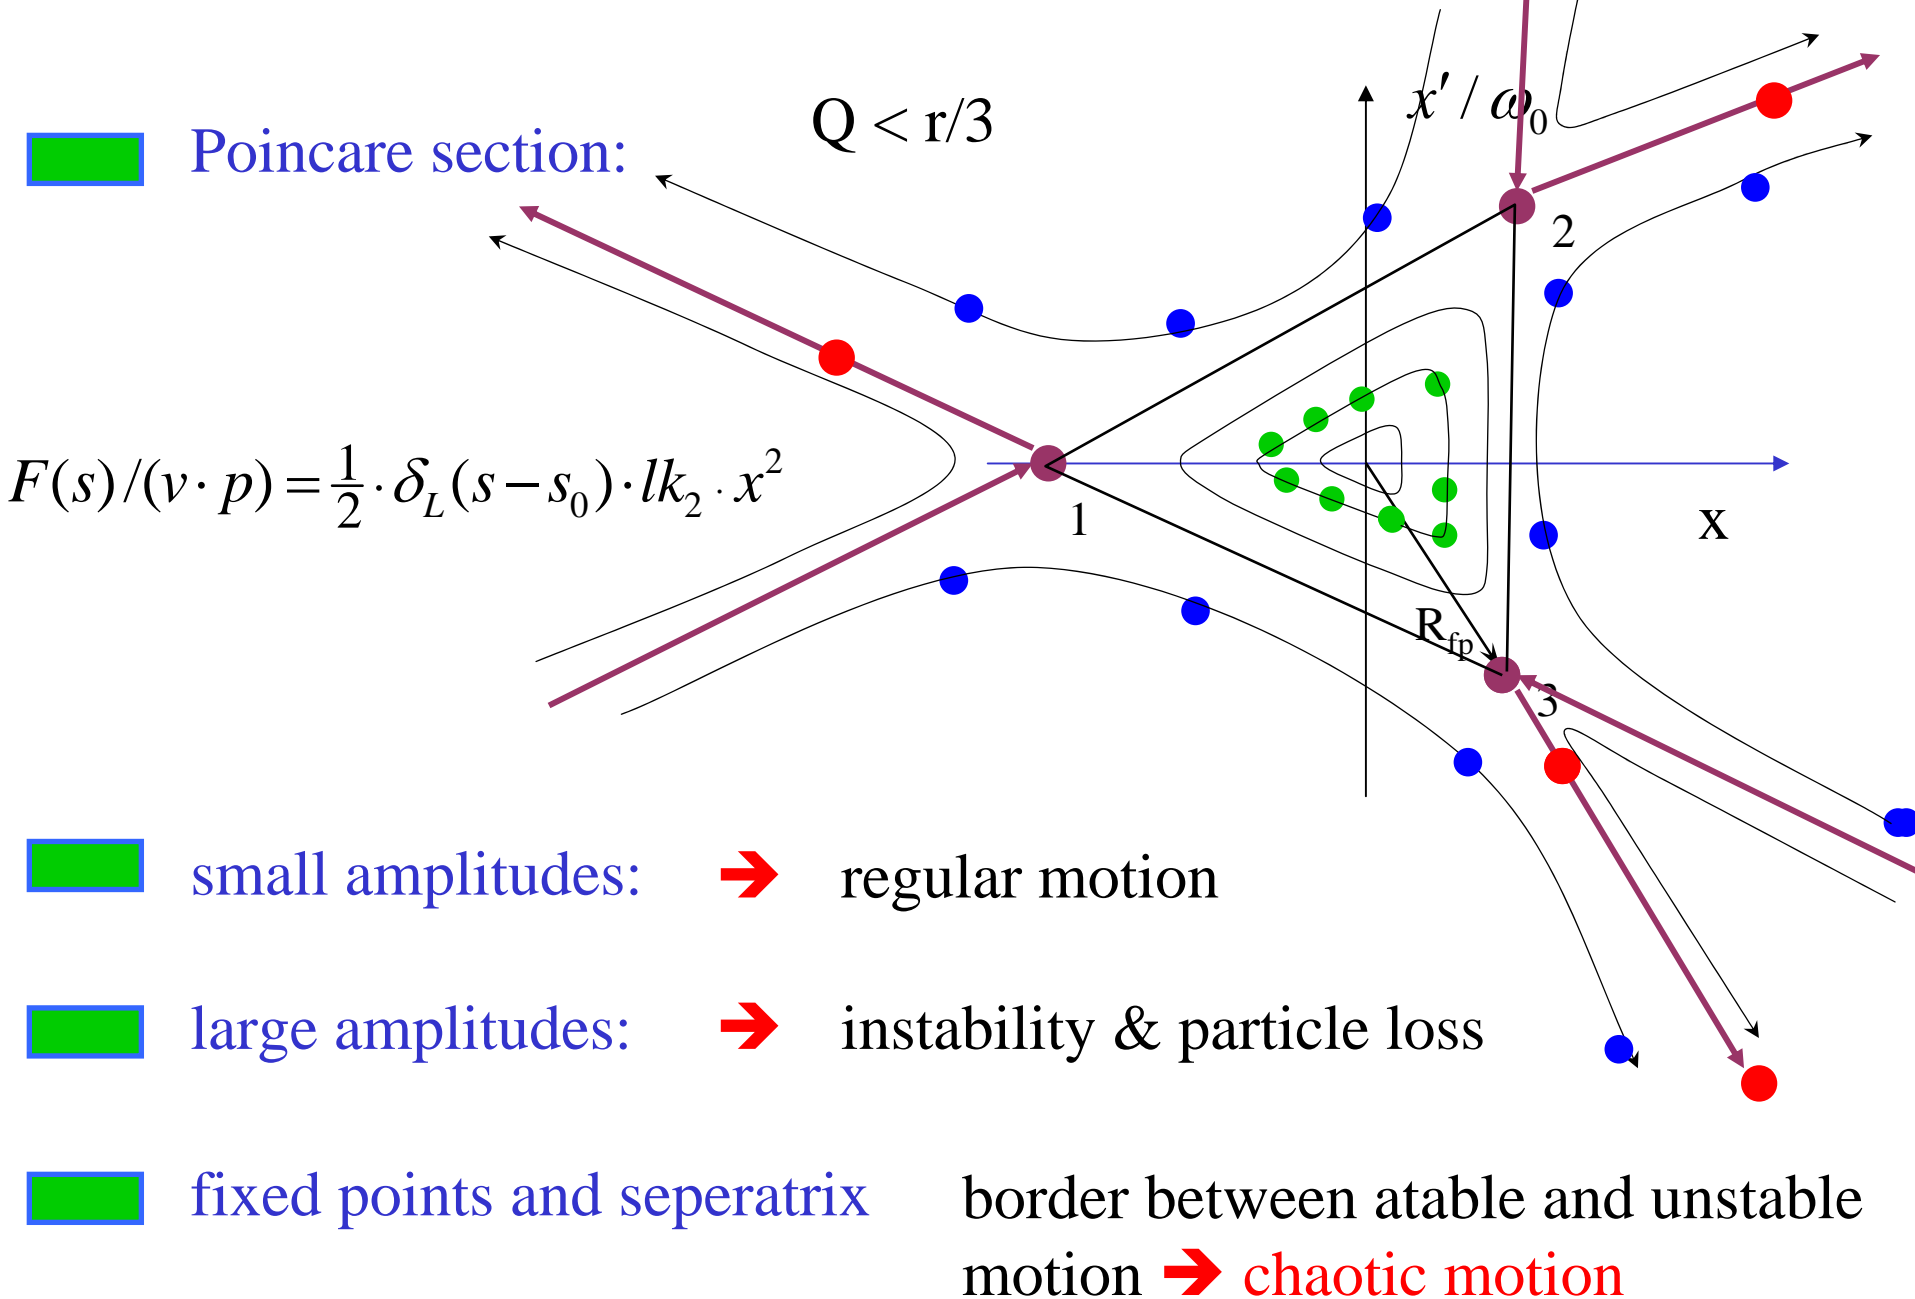

Poincare Section: Simulation for a Sextupole Perturbation

■ Poincare Section right after the sextupole kick


- for small amplitudes the intersections still lie on closed curves → regular motion!
- separatrix location depends on the tune distance from the exact resonance condition ($Q < n/3$)

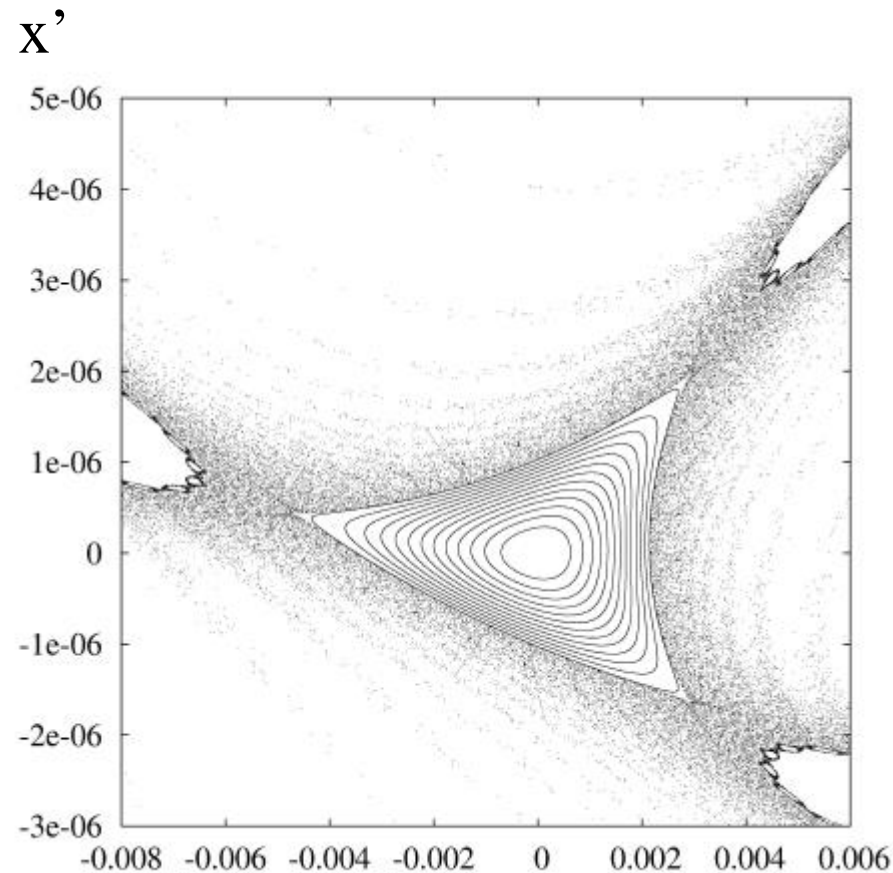

for large amplitudes and near the separatrix the intersections fill areas in the Poincare Section → chaotic motion;
→ no analytical solution exist!

Slow Extraction With Sextupoles

Septum magnet:

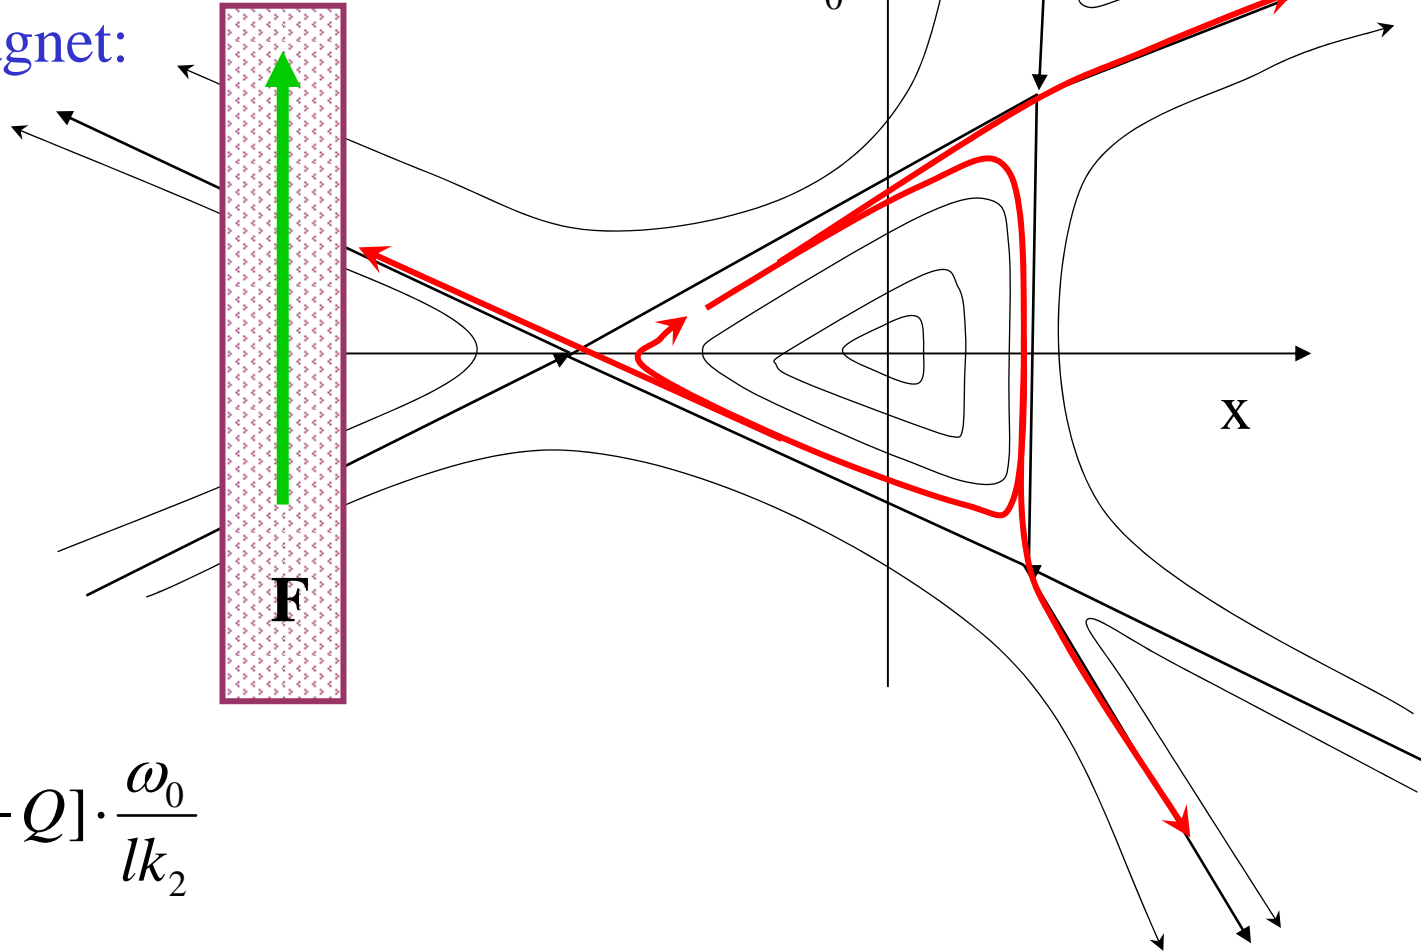

$$R_{fp}^{1/2} = 16\pi \left[\frac{r}{3} - Q \right] \cdot \frac{\omega_0}{lk_2}$$

→ adjust tune closer to the resonance condition during extraction

the region of stable motion shrinks and more particles reach the septum

Stabilization of Resonances

instability can be fixed by stronger ‘detuning’:

→ if the phase advance per turn changes uniformly with increasing R the motion moves off resonance and stabilizes

octupole perturbation:

$$F(s)/(v \cdot p) = \frac{1}{6} \cdot lk_3 \cdot x^3$$

perturbation treatment:

$$x(s) = x_0(s) + \varepsilon \cdot x_1(s) + \dots$$

→
$$\frac{d^2}{ds^2} x_1(s) + (2\pi Q_{x,0} / L)^2 \cdot x_1(s) = \frac{1}{6} \cdot lk_3 \cdot x_0^2 \cdot x_1$$

$$x_0 = A \cdot \cos(\phi) \Rightarrow x_0^2 = \frac{A^2}{2} \cdot [1 + \cos(2\phi)]$$

$$\frac{d^2}{ds^2} x_1(s) + \left[(2\pi Q_{x,0} / L)^2 - \frac{A^2 \cdot lk_3}{2 \cdot 6} \right] \cdot x_1(s) = \frac{A^2 \cdot lk_3}{2 \cdot 6} \cdot \cos(2\phi) \cdot x_1$$


Stabilization of Resonances

resonance stability for octupole:

→ an octupole perturbation generate phase independent detuning and amplitude growth of the same order

→ amplitude growth and detuning are balanced and the overall motion is stable!

→ this is not generally true in case of several resonance driving terms and coupling between the horizontal and vertical motion!

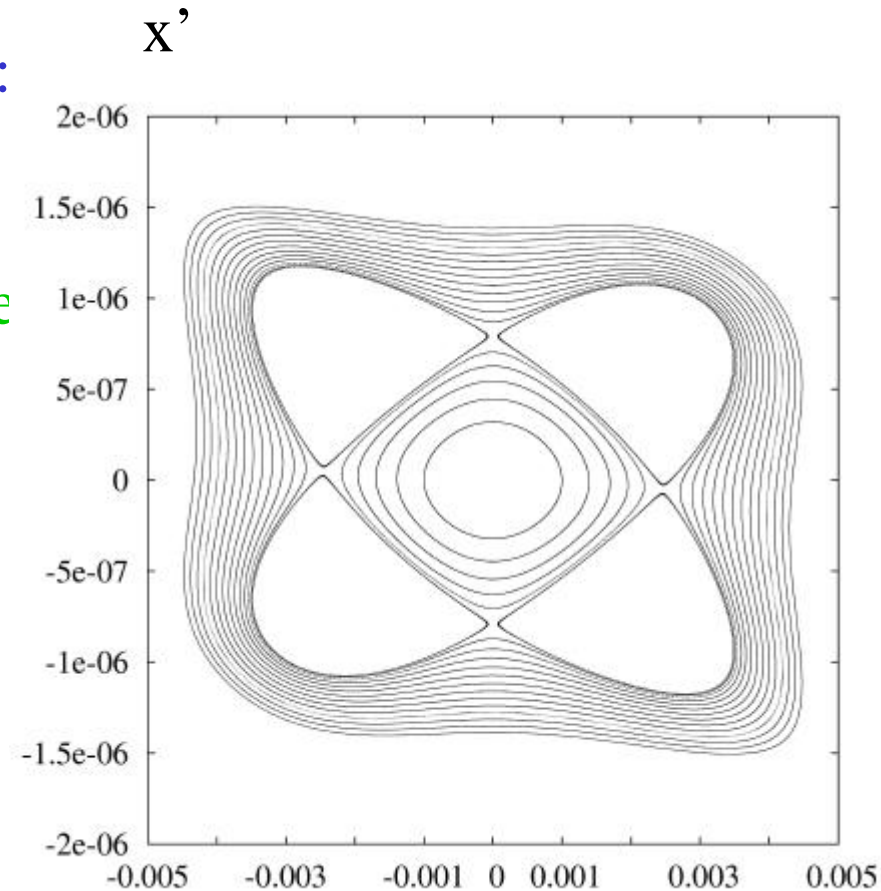


X

Chaotic Motion

octupole + sextupole perturbation:

x'


- the interference of the octupole and sextupole perturbations generate additional resonances
→ additional island chains in the Poincare Section!
- intersections near the resonances lie no longer on closed curves → local chaotic motion around the separatrix & instabilities
→ slow amplitude growth (Arnold diffusion)
- neighboring resonance islands start to ‘overlap’ for large amplitudes → global chaos & fast instabilities

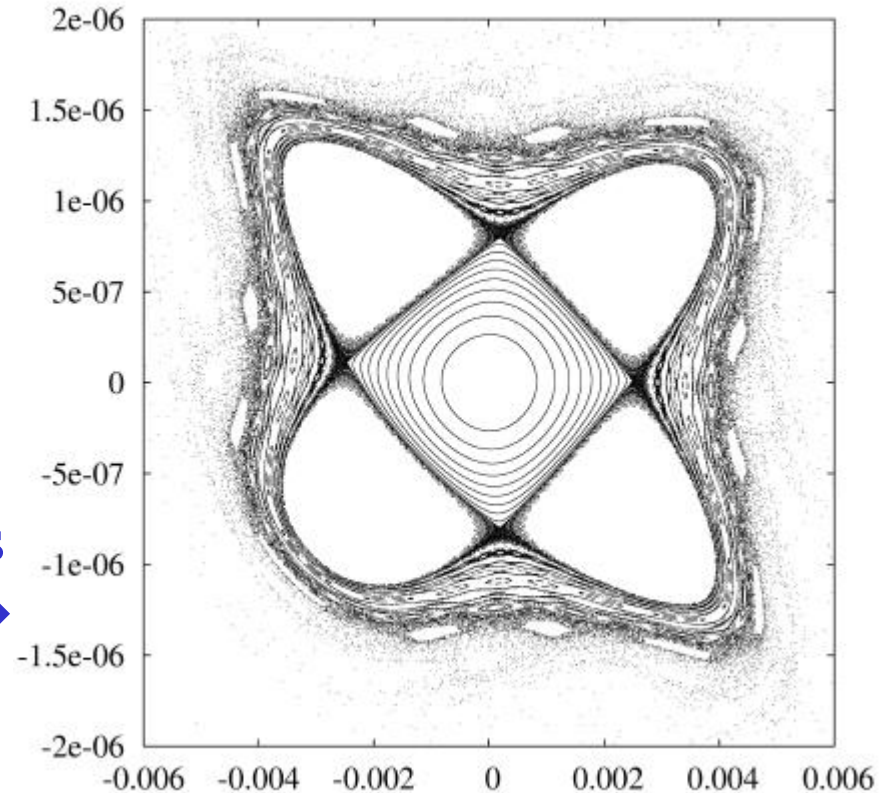

x

Chaotic Motion

‘Russian Doll’ effect:

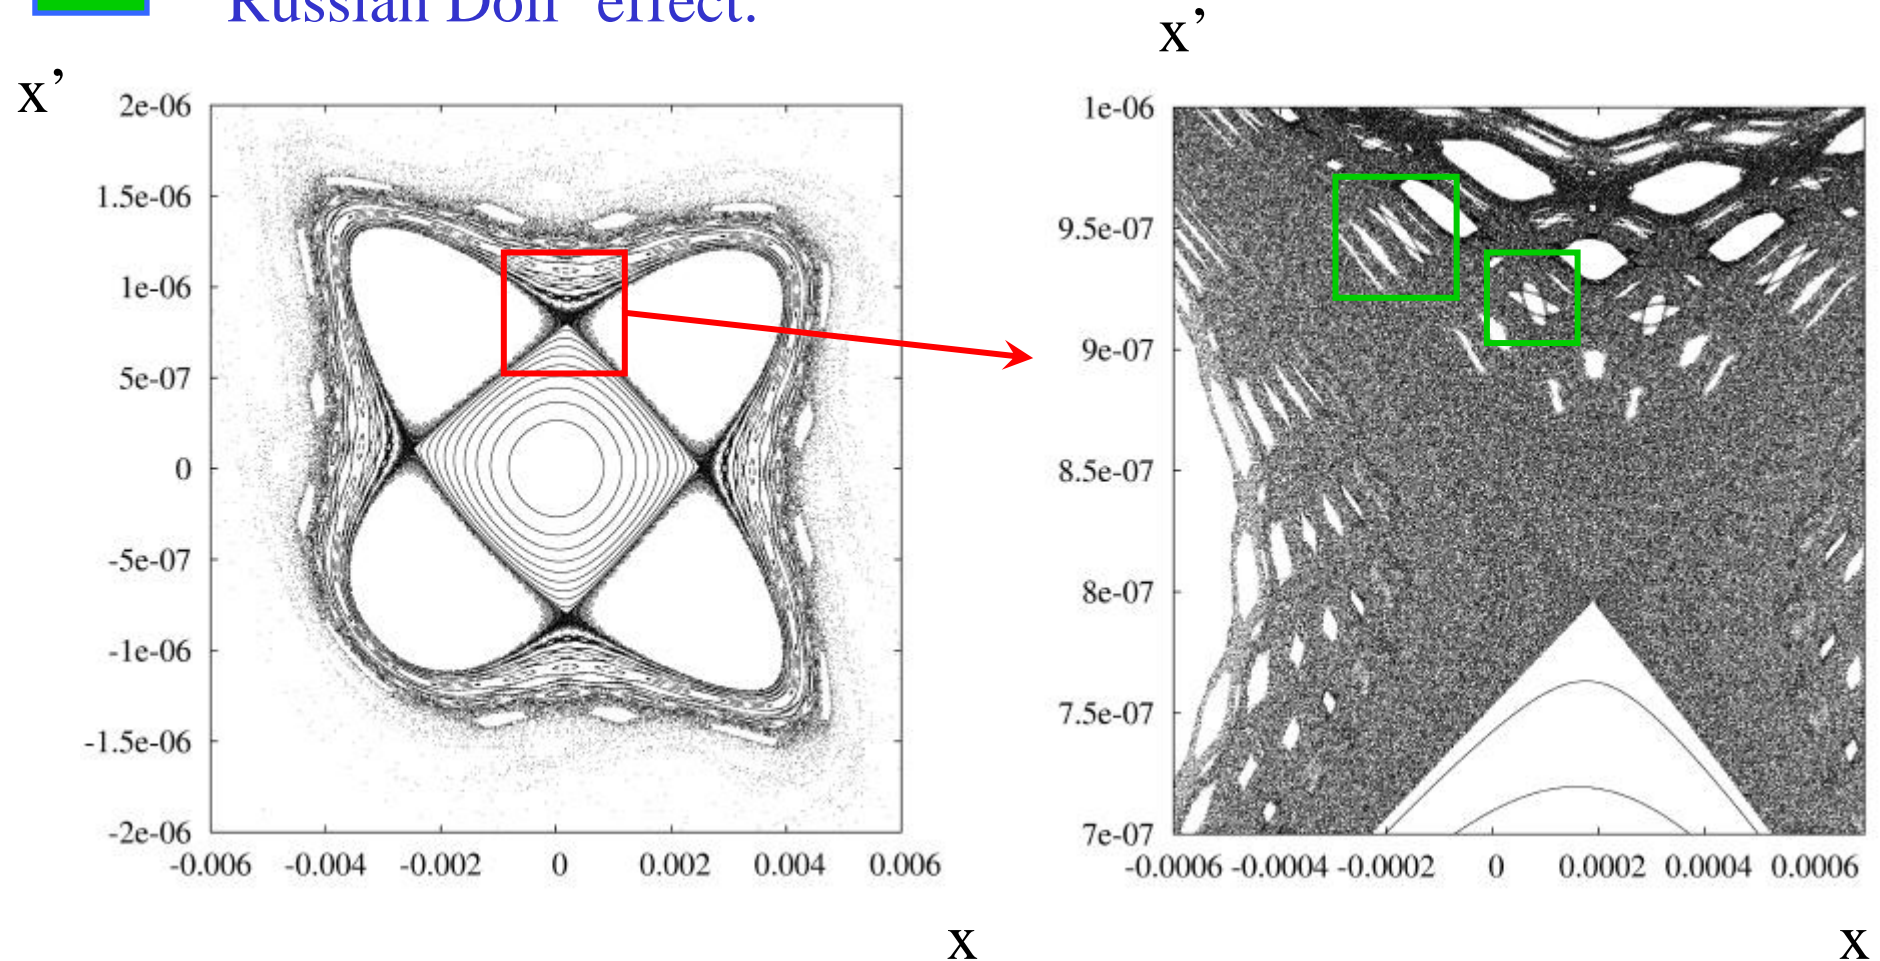

→ magnifying sections of the Poincaré Section reveals always the same pattern on a finer scale → renormalization theory!

Summary

field imperfections drive resonances

higher order than quadrupole field imperfections generate non-linear equations of motion (no closed analytical solution)

(three body problem of Sun, Earth and Jupiter)

→ solutions only via perturbation treatment

Poincare Section as a graphical tool for analyzing the stability

slow extraction as example of resonance application in accelerator

island chains as signature for non-linear resonances

island overlap as indicator for globally chaotic & unstable motion