



# Beam Diagnostics Lecture 2

Measuring Complex Accelerator Parameters

Uli Raich

CERN AB-BI

U. Raich CAS Frascati 2008  
Beam Diagnostics

**CAS**

**THE CERN ACCELERATOR SCHOOL**



## Contents of lecture 2

- Some examples of measurements done with the instruments explained during the last lecture
  - Spectroscopy
  - Trajectory and Orbit measurements
  - Tune measurements
    - Traditional method
    - BBQ method
  - Transverse and longitudinal emittance measurements
  - Longitudinal phase space tomography



## Faraday Cup application Testing the decelerating RFQ

### Antiproton decelerator

- Accelerate protons to 24 GeV and eject them onto a target
- Produce antiprotons at 2 GeV
- Collect the antiprotons and cool them
- Decelerate them and cool them
- Output energy: 100 MeV


### In order to get even lower energies:

- Pass them through a moderator
  - High losses
  - Large energy distribution


=> **Build a decelerating RFQ**



# Waiting for Godot

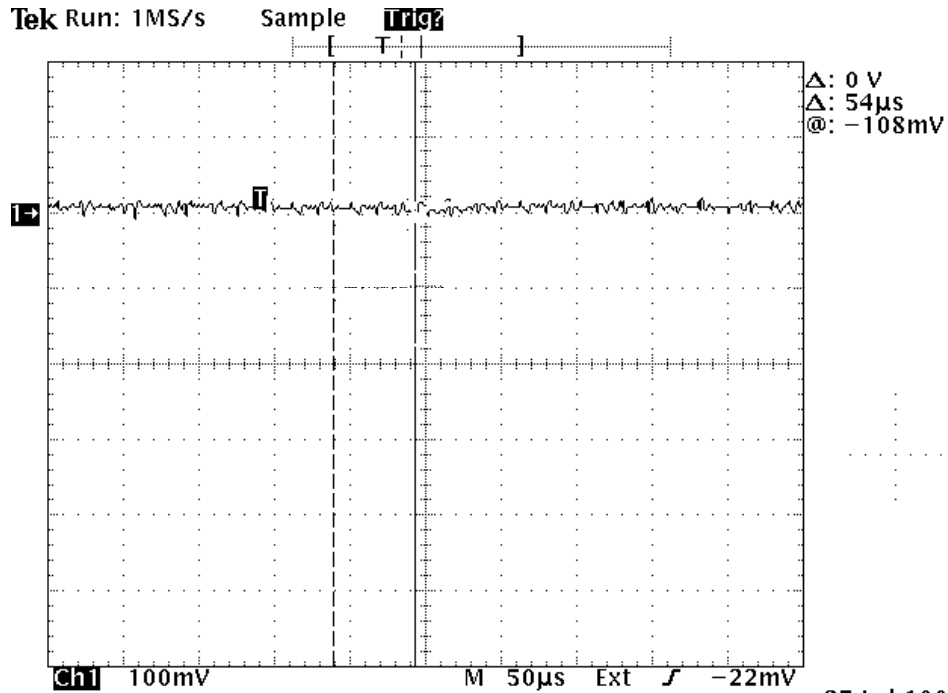


27 Jul 1999  
16:15:32

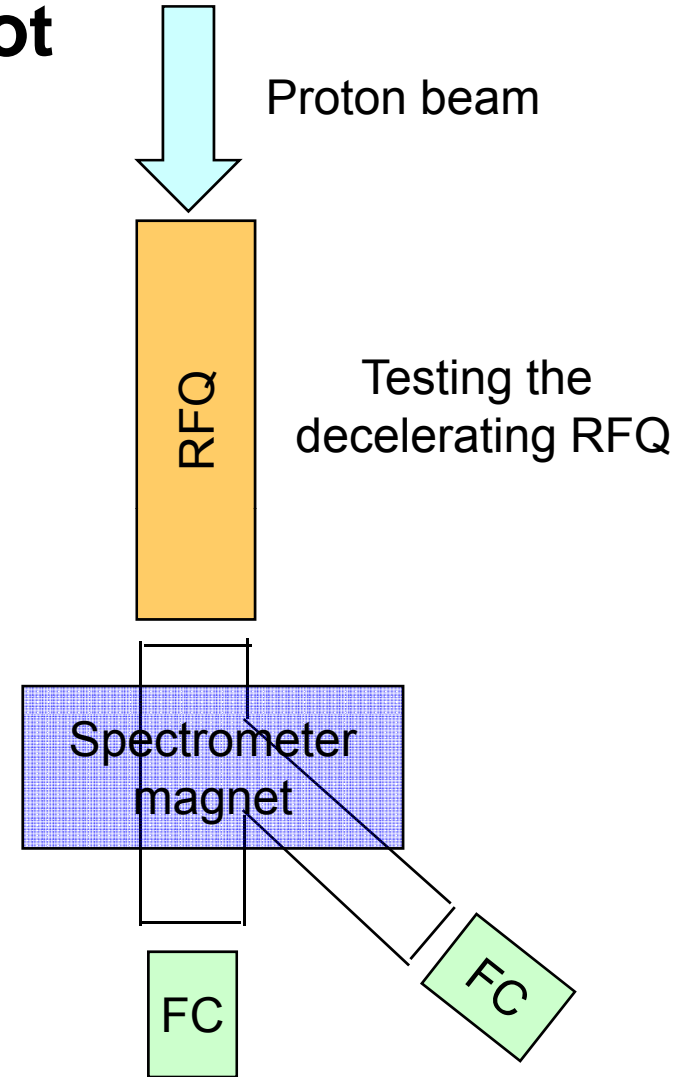




# Setup for charge state measurement

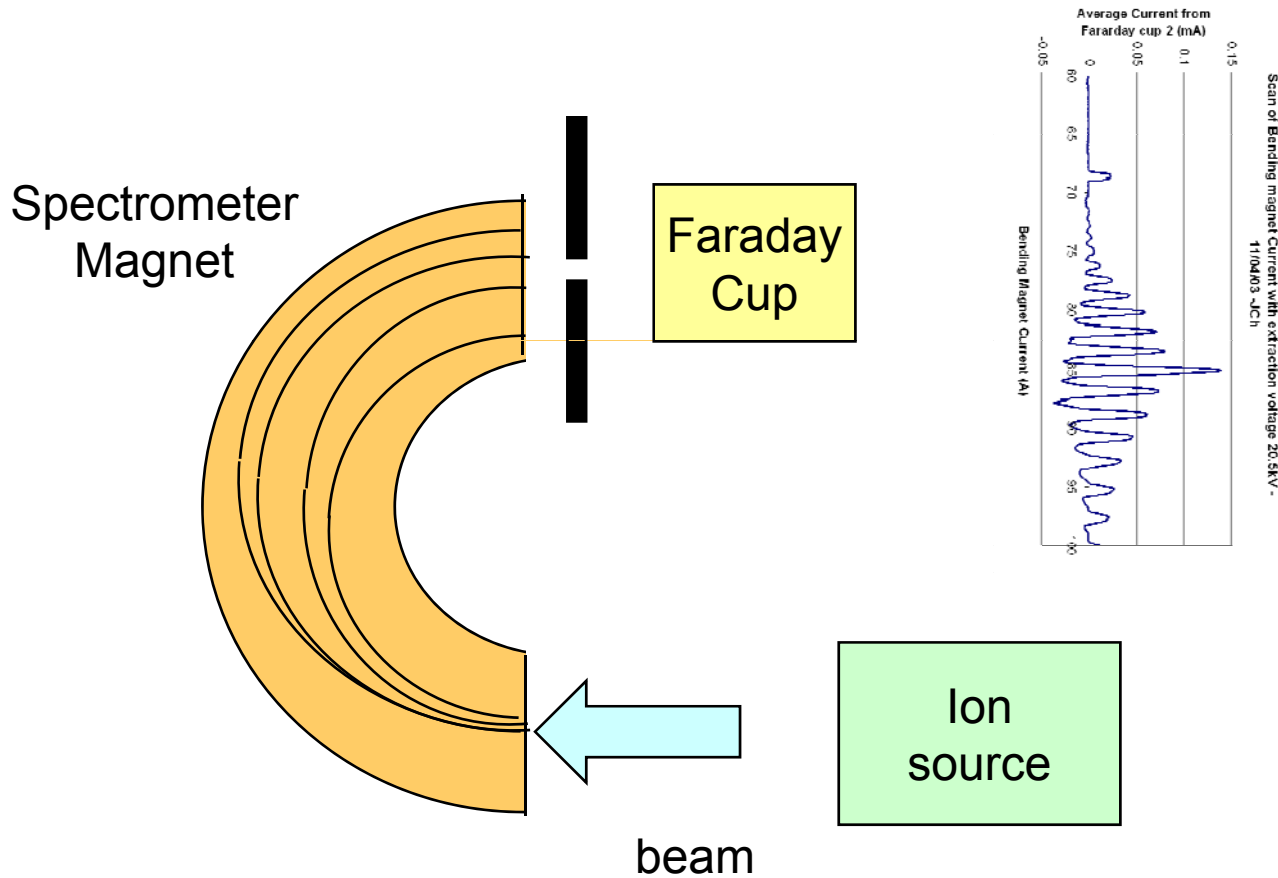

The spectrometer magnet is swept and the current passing the slit is measured



# Measuring charge state distribution

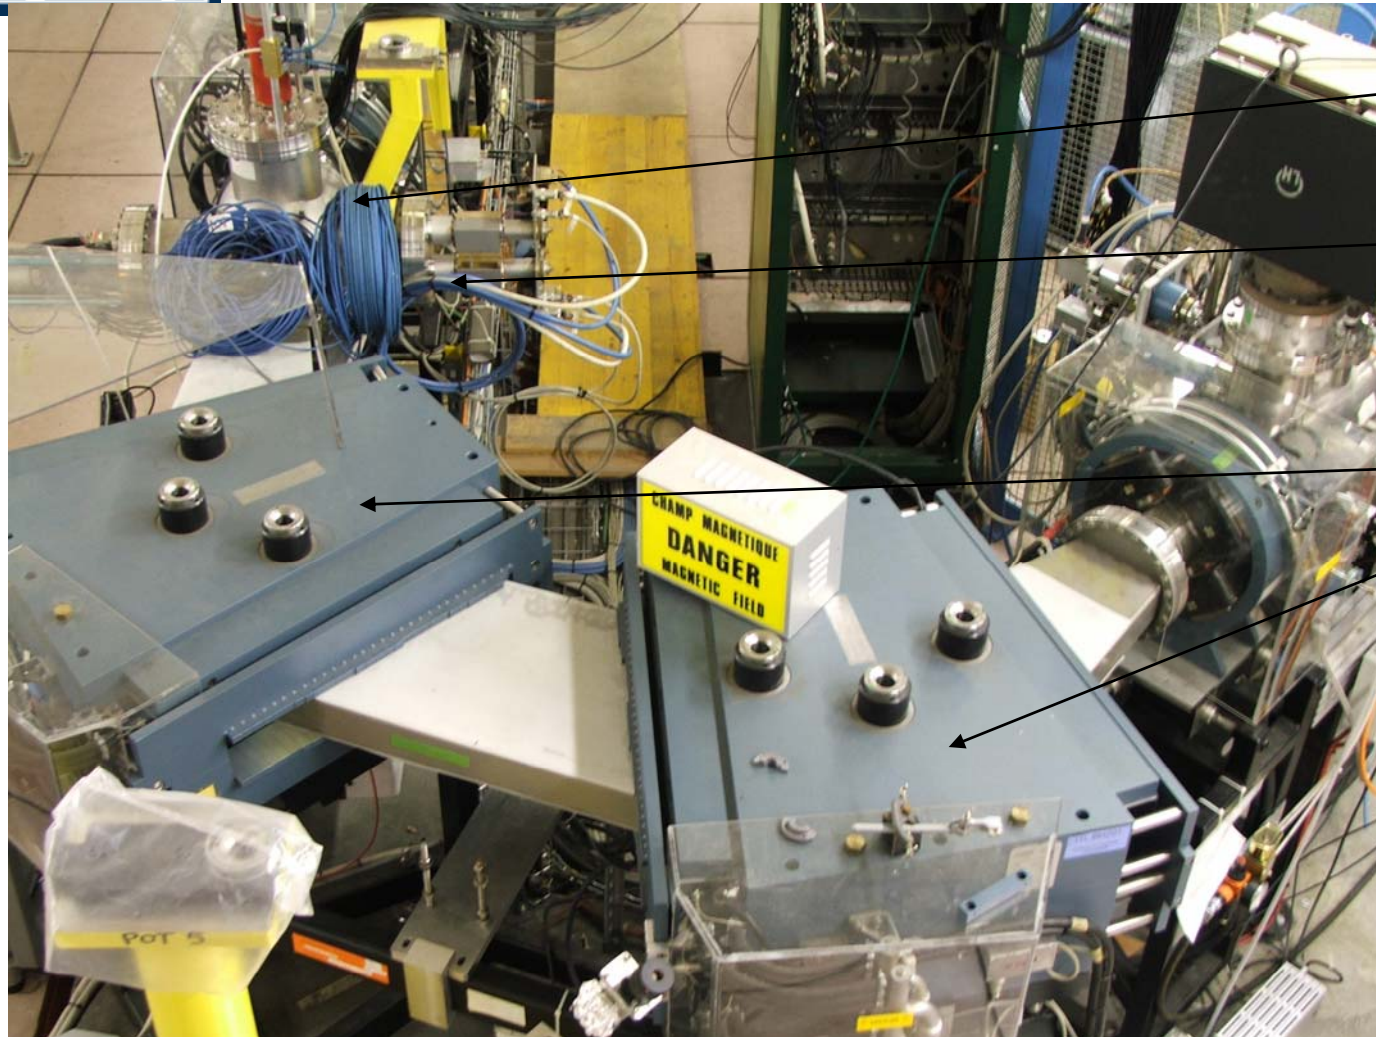

Faraday Cup

Slit

Spectrometer magnets

CHAMP MAGNETIQUE  
DANGER  
MAGNETIC FIELD

U. Raich CAS Frascati 2008  
Beam Diagnostics


**CAS**

THE CERN ACCELERATOR SCHOOL



# Charge state distribution measured with a Faraday Cup on a heavy ion source

Scan of Bending magnet Current with extraction voltage 20.5kV -  
11/04/03 -JCh

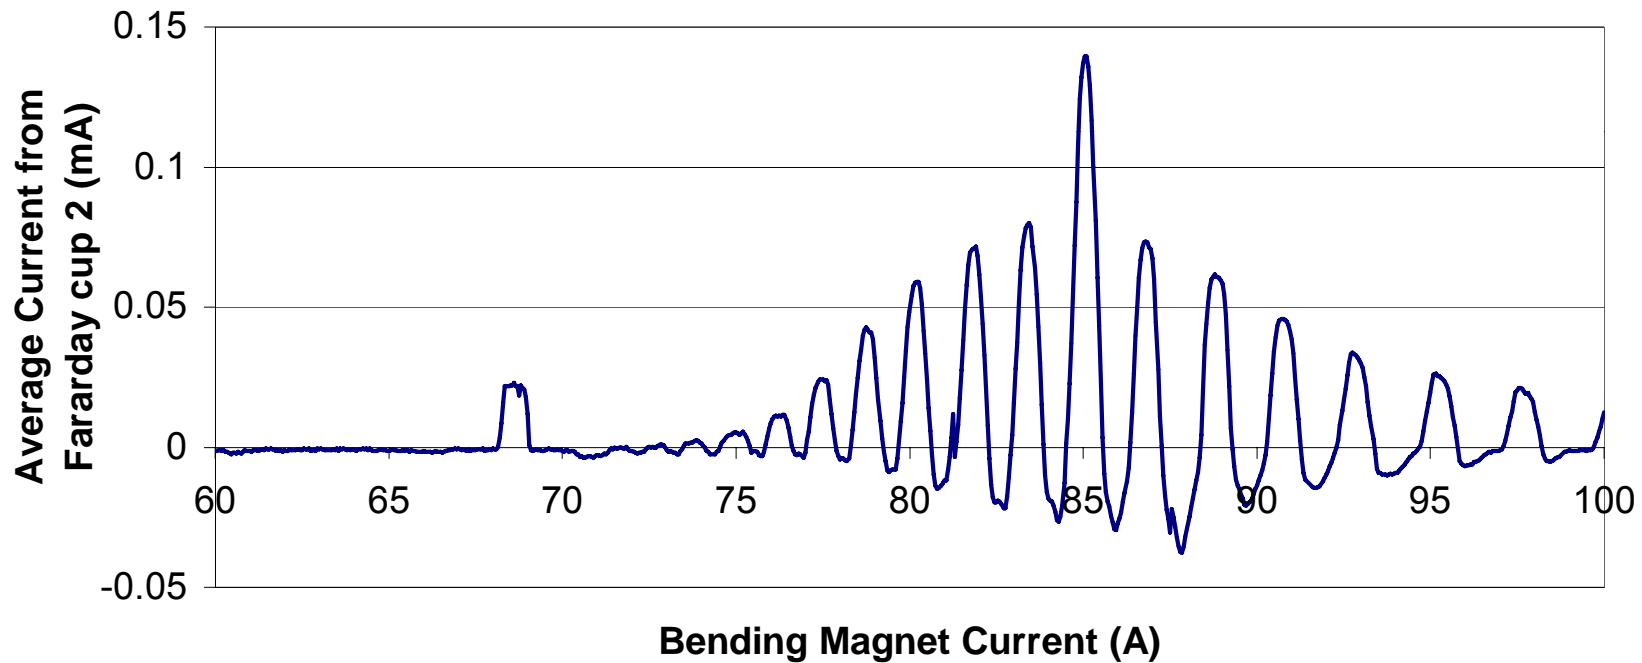

U. Raich CAS Frascati 2008  
Beam Diagnostics

**CAS**

THE CERN ACCELERATOR SCHOOL



## Trajectory and Orbit measurements

Definitions:

Trajectory: The mean positions of the beam during 1 turn

Orbit: The mean positions over many turns for each of the  
BPMs

The trajectories must be controlled at injection, ejection, transition  
Closed orbits may change during acceleration or RF “gymnastics”





# The PUs



U. Raich CAS Frascati 2008  
Beam Diagnostics


**CAS**

**THE CERN ACCELERATOR SCHOOL**



# The PS, a universal machine

All beams pass through the PS  
Different particle types  
Different beam characteristics  
Concept of a super cycle

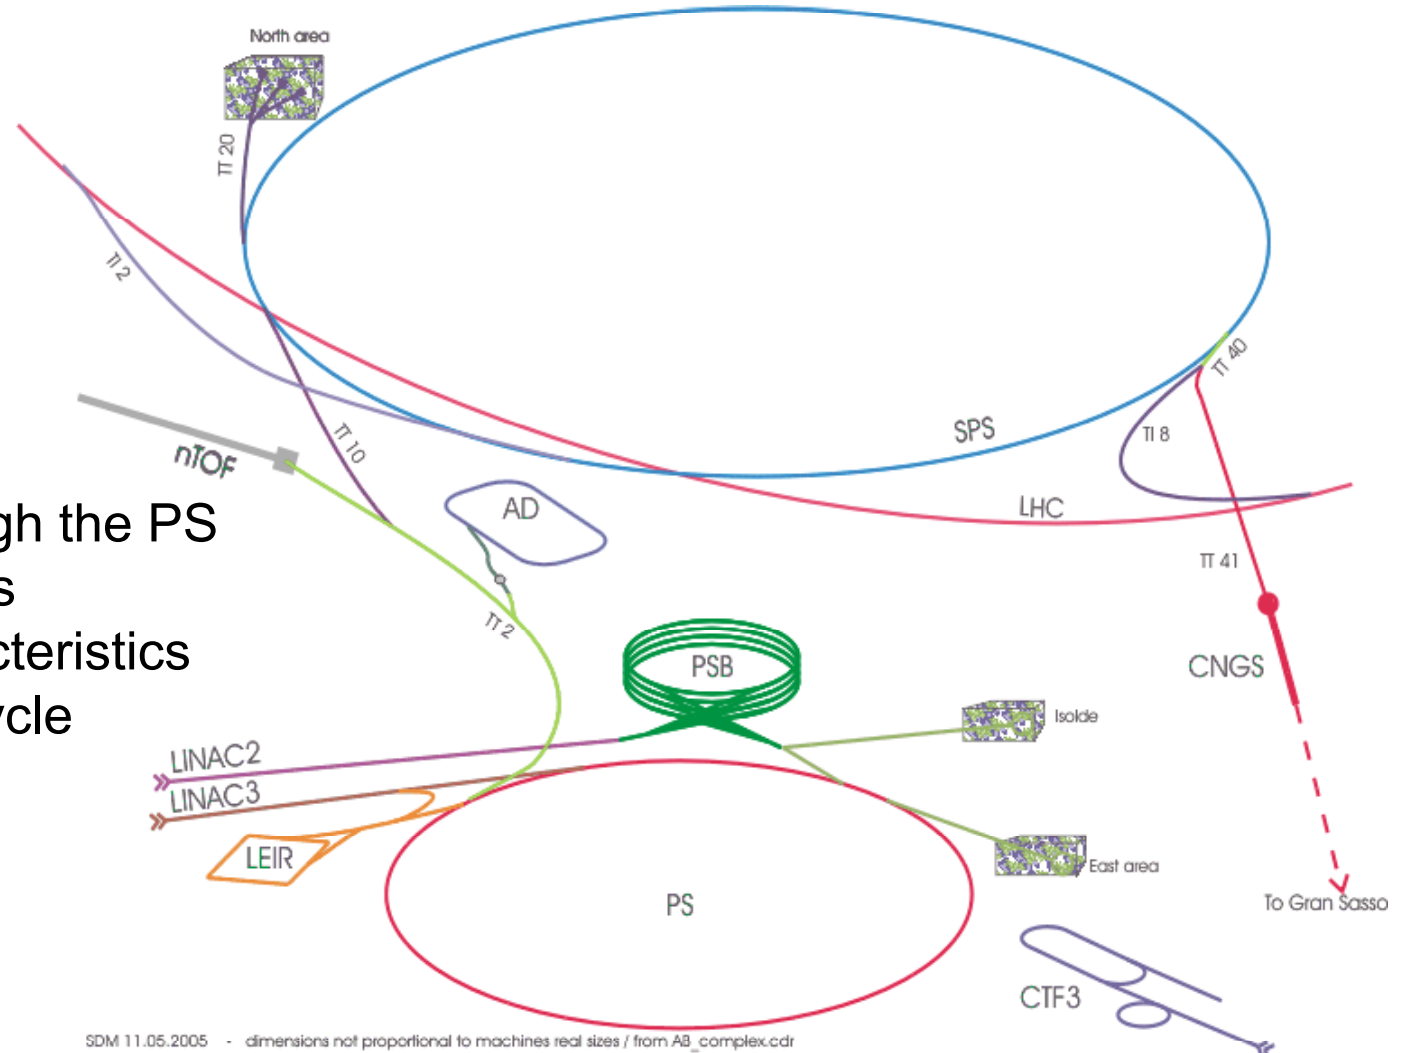

SDM 11.05.2005 - dimensions not proportional to machines real sizes / from AB\_complex.cdr


U. Raich CAS Frascati 2008  
Beam Diagnostics



THE CERN ACCELERATOR SCHOOL



# The super cycle

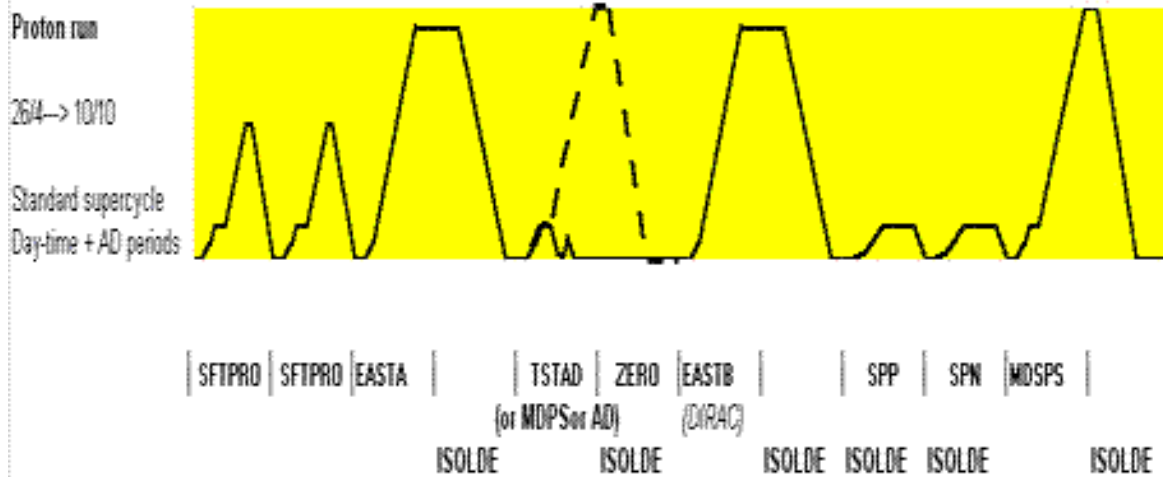



# Position Measurements

Red: The sum signal

Green: The difference signal


Procedure:

Produce integration gates and  
Baseline signals

Baseline correct both signals


Integrate sum and difference signals  
and store results in memory

Take external timing events into  
account e.g. harmonic number  
change,  $\gamma$ -transition etc.

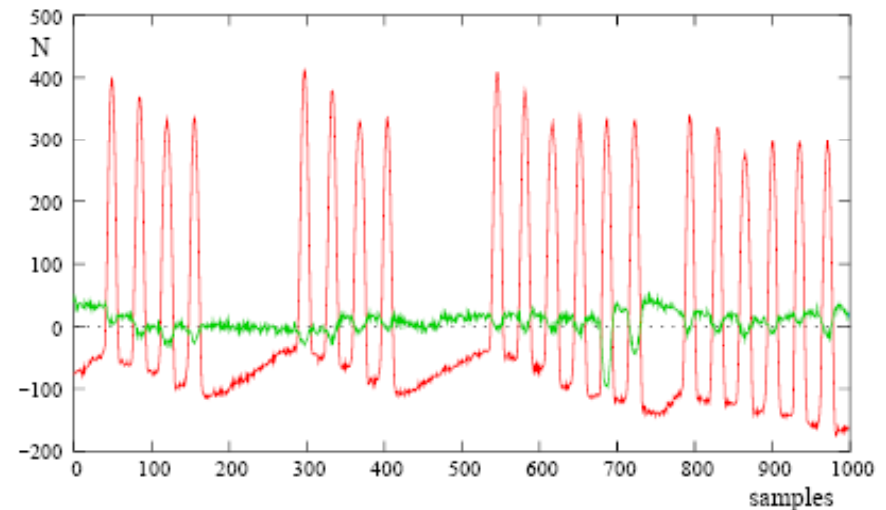



# Trajectory readout electronics

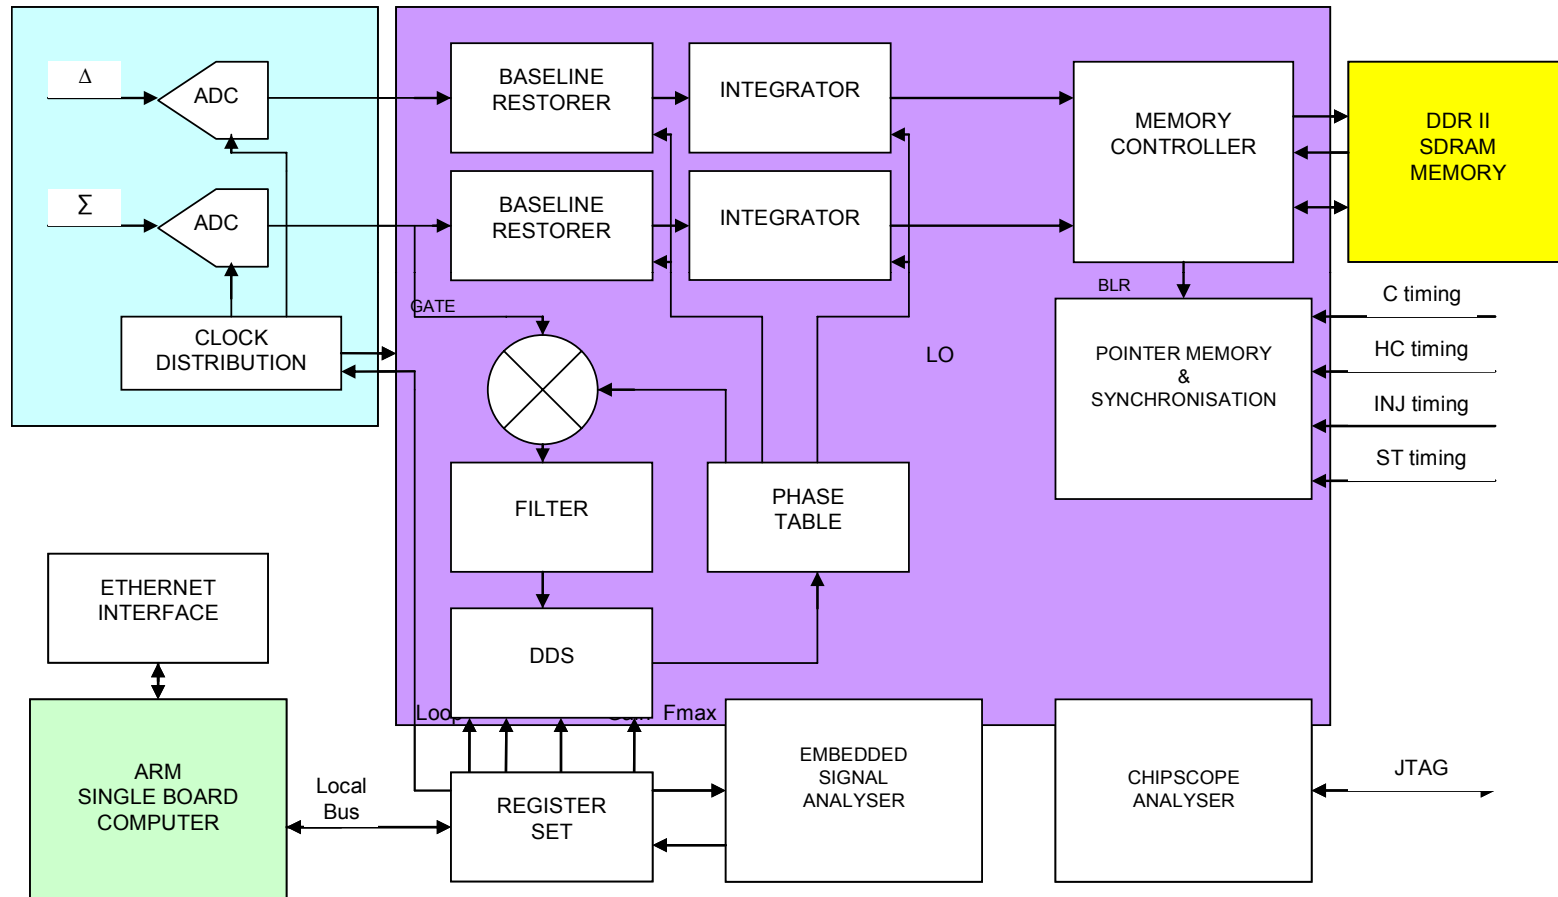



U. Raich CAS Frascati 2008  
Beam Diagnostics

**CAS**

THE CERN ACCELERATOR SCHOOL




# Baseline restoration

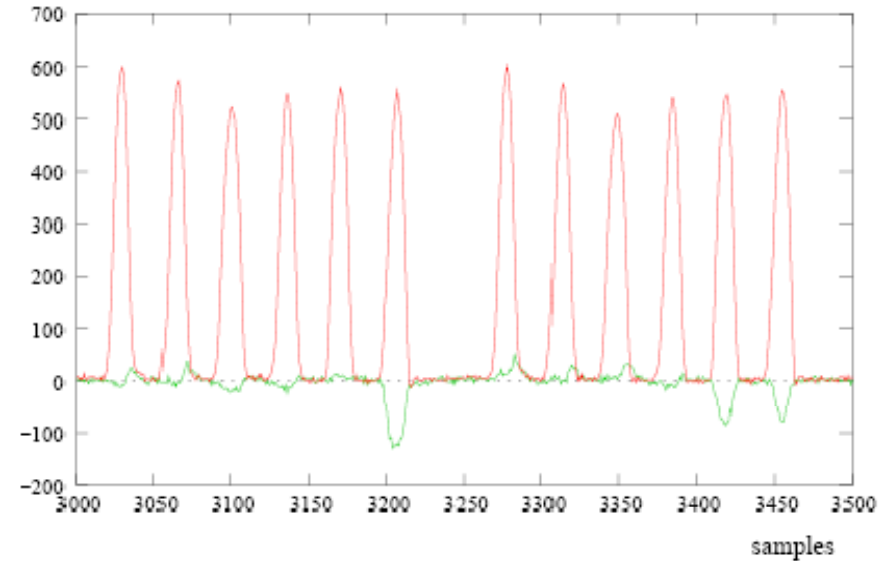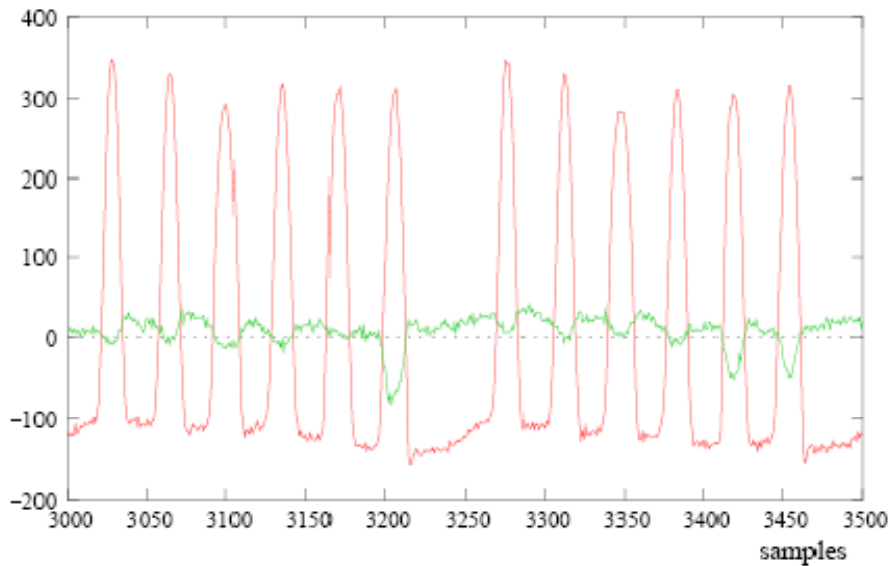

Low pass filter the signal to get an estimate of the base line  
Add this to the original signal



# Beams in the PS

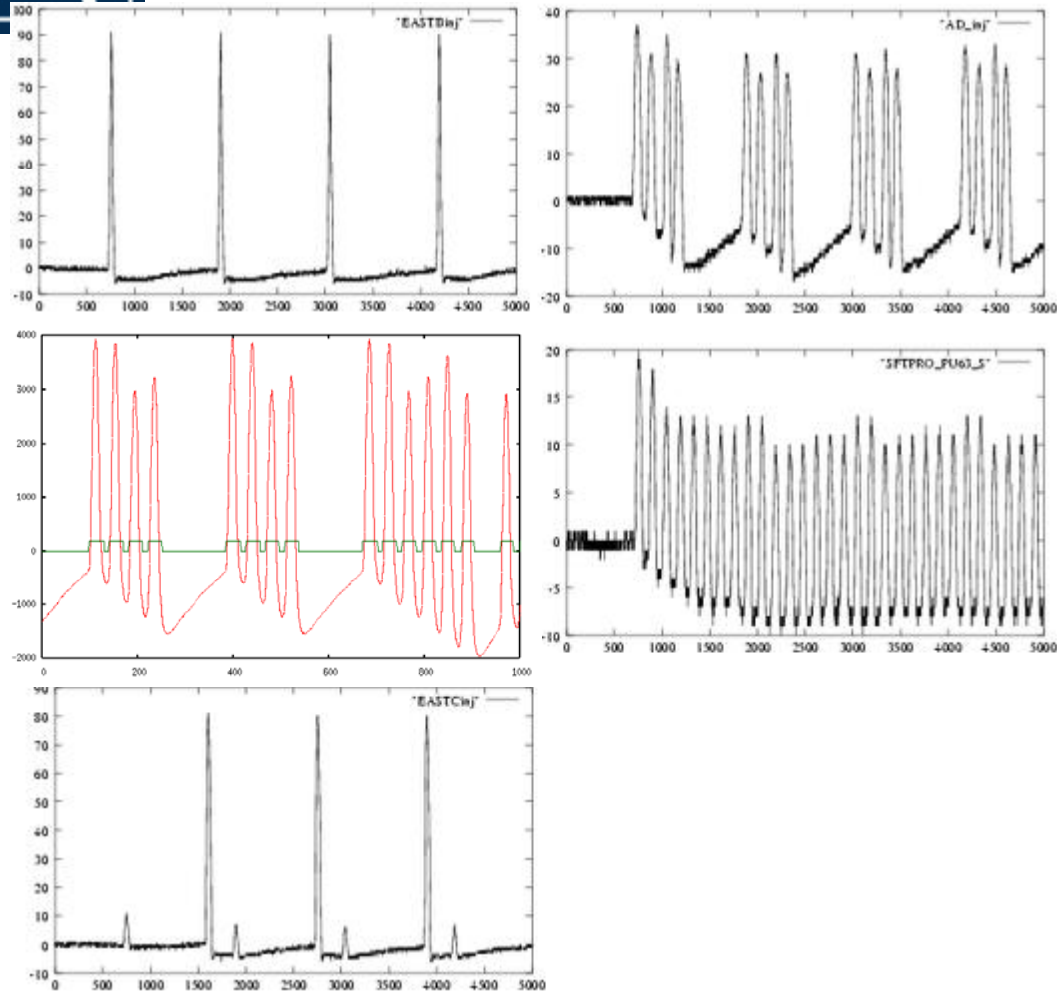


U. Raich CAS Frascati 2008  
Beam Diagnostics

**CAS**


THE CERN ACCELERATOR SCHOOL




# RF Gymnastics

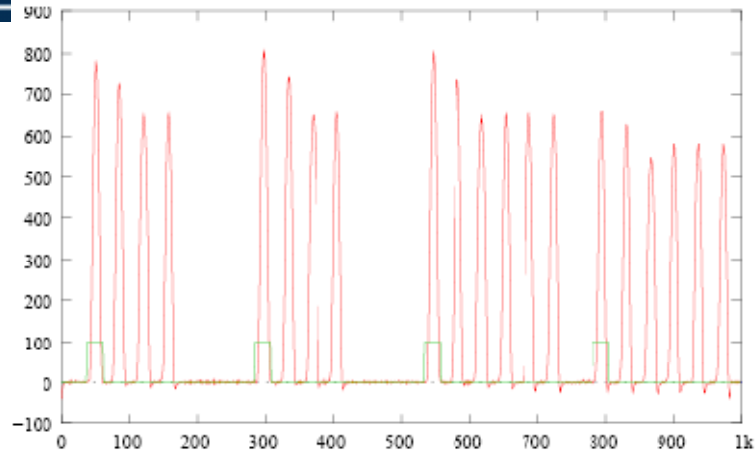

Example of generated gate around 2<sup>nd</sup> injection

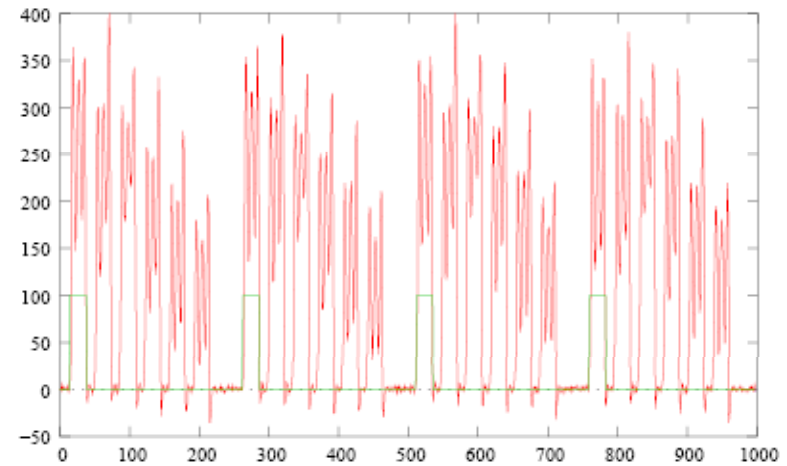

Idem, during bunch splitting

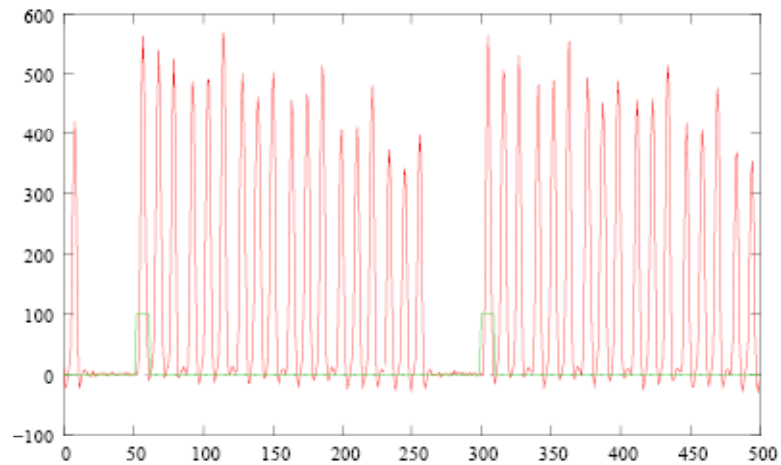

U. Raich CAS Frascati 2008  
Beam Diagnostics

**CAS**


**THE CERN ACCELERATOR SCHOOL**





## Trajectory measurements in circular machines

Needs integration gate  
Can be rather tricky  
Distance between bunches  
changes with acceleration  
Number of bunches  
may change

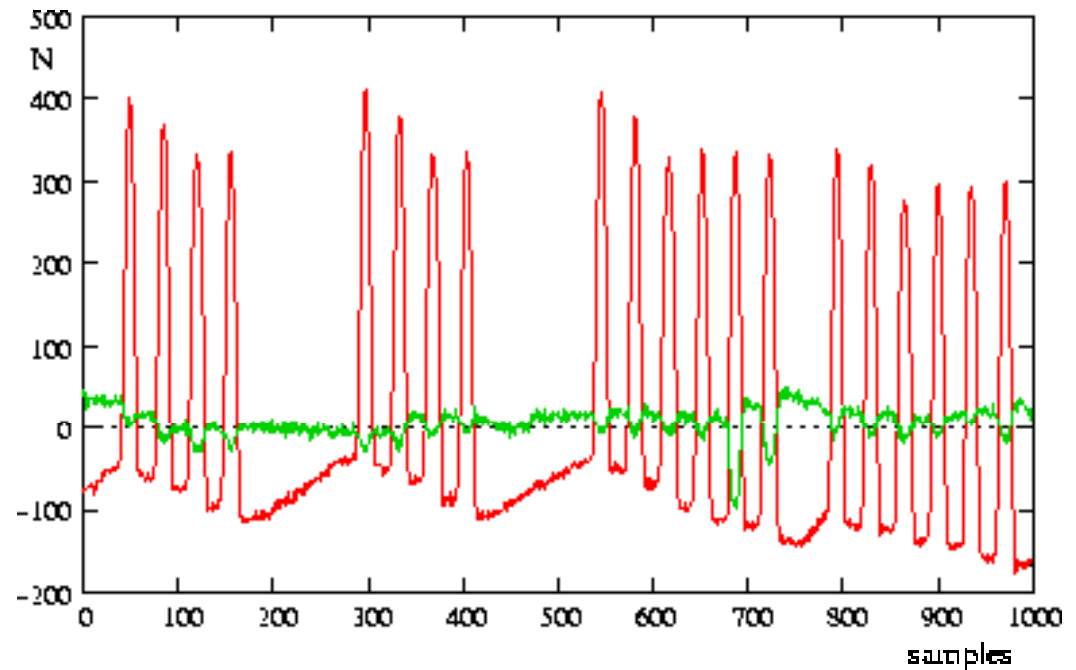


Raw data from pick-ups  
double batch injection



## Changing bunch frequency


- Bunch splitting or recombination
- One RF frequency is gradually decrease while the other one is increased
- Batch compression

For all these cases the gate generator must be synchronized

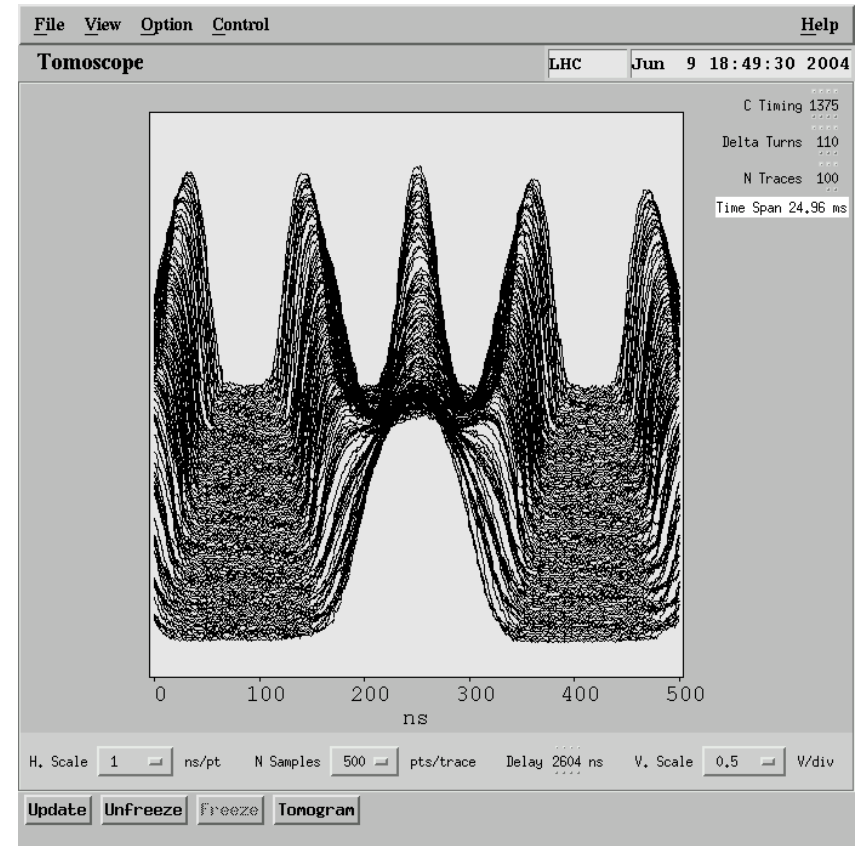



# Batch compression

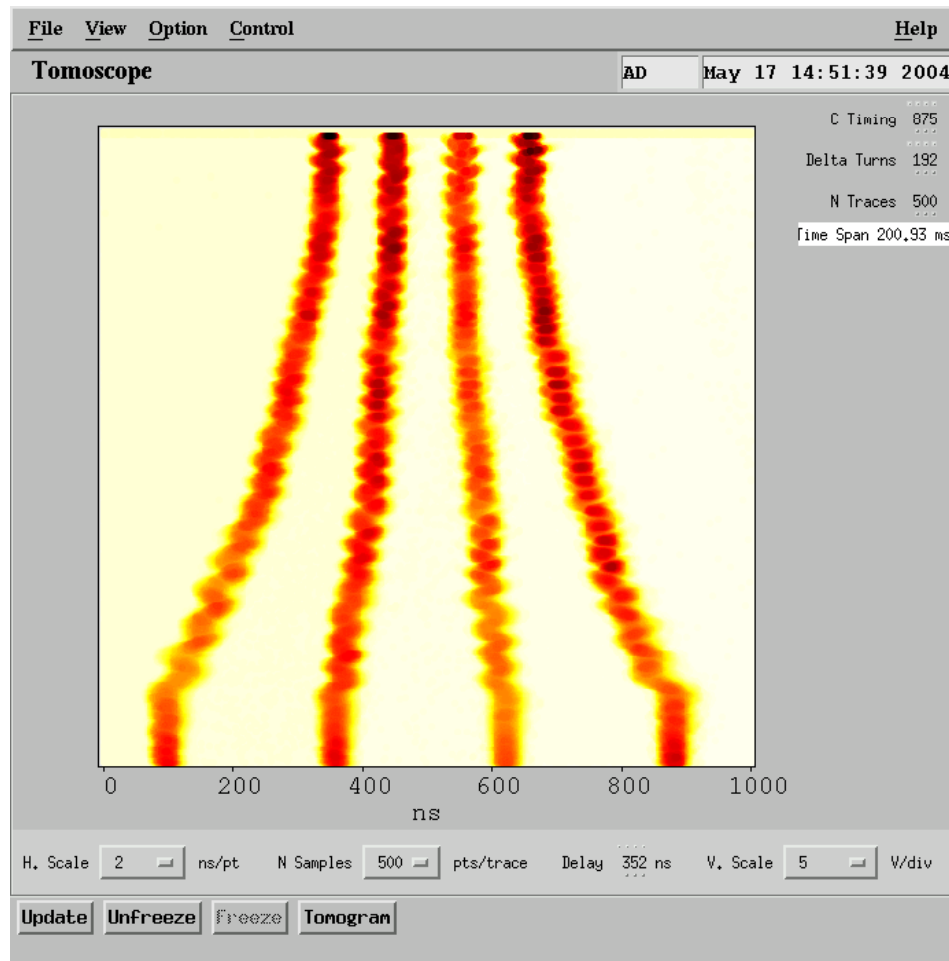

U. Raich CAS Frascati 2008  
Beam Diagnostics


**CAS**

THE CERN ACCELERATOR SCHOOL



# Tune measurements


- When the beam is displaced (e.g. at injection or with a deliberate kick, it starts to oscillate around its nominal orbit (betatron oscillations)
- Measure the trajectory
- Fit a sine curve to it
- Follow it during one revolution

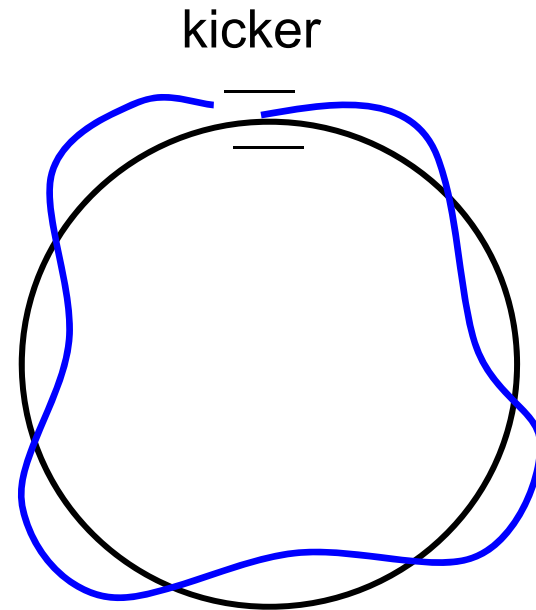





# The Sensors

Shoobox pick-up  
with linear cut

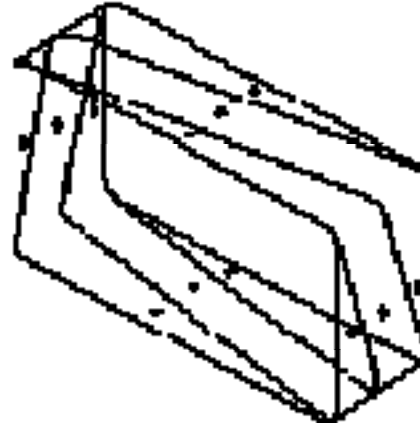

The kicker

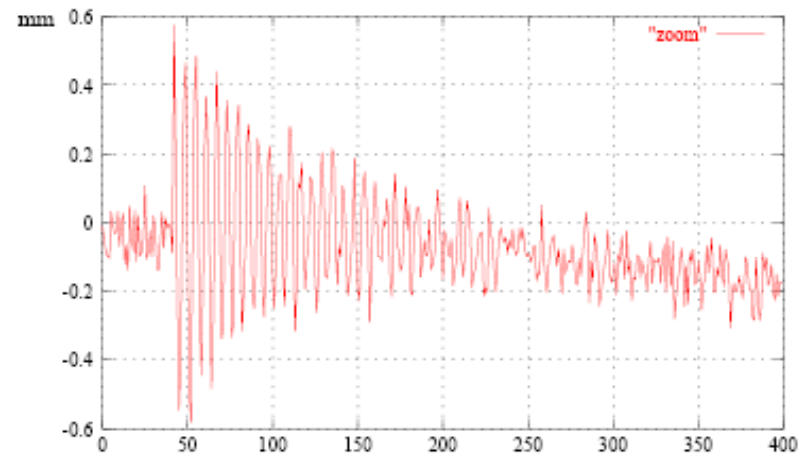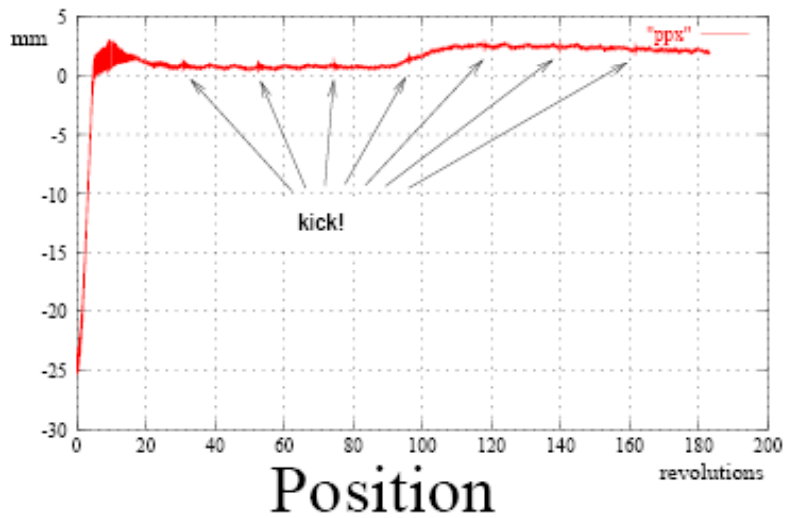


U. Raich CAS Frascati 2008  
Beam Diagnostics

**CAS**

THE CERN ACCELERATOR SCHOOL





## Tune measurements with a single PU

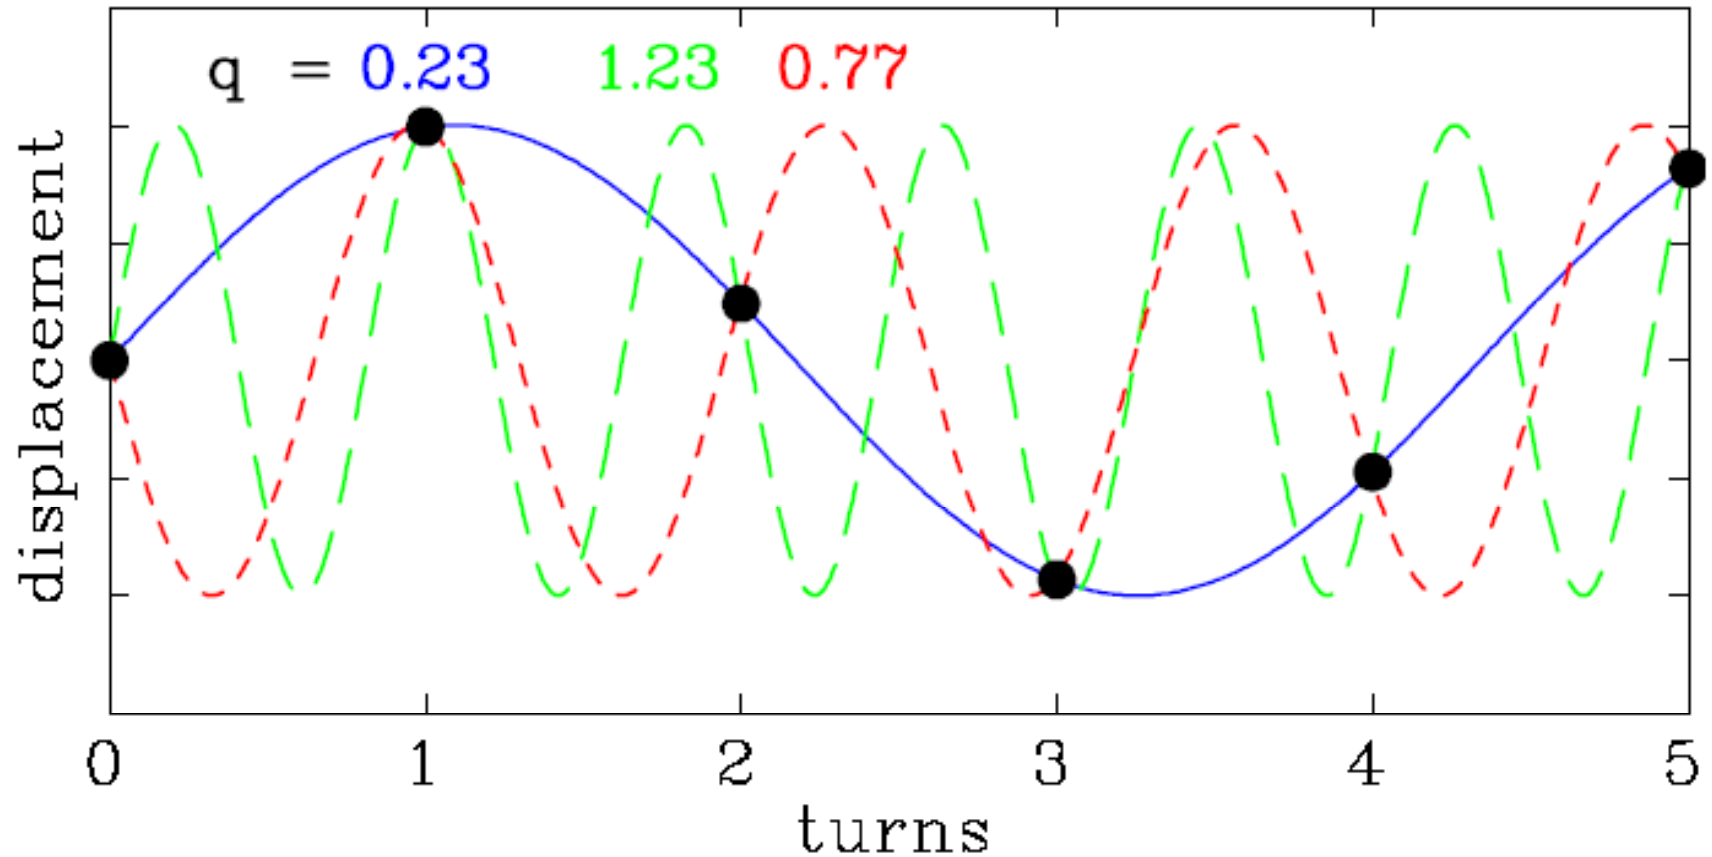



## Kicker + 1 pick-up


- Measures only non-integral part of  $Q$
- Measure a beam position at each revolution

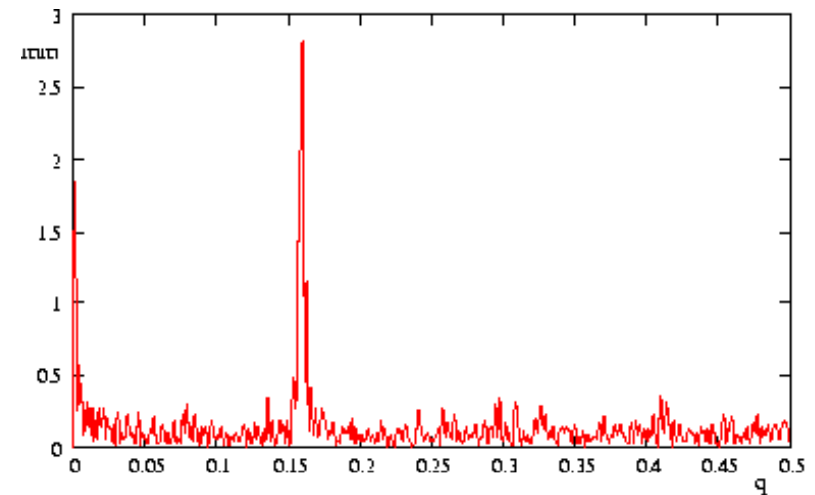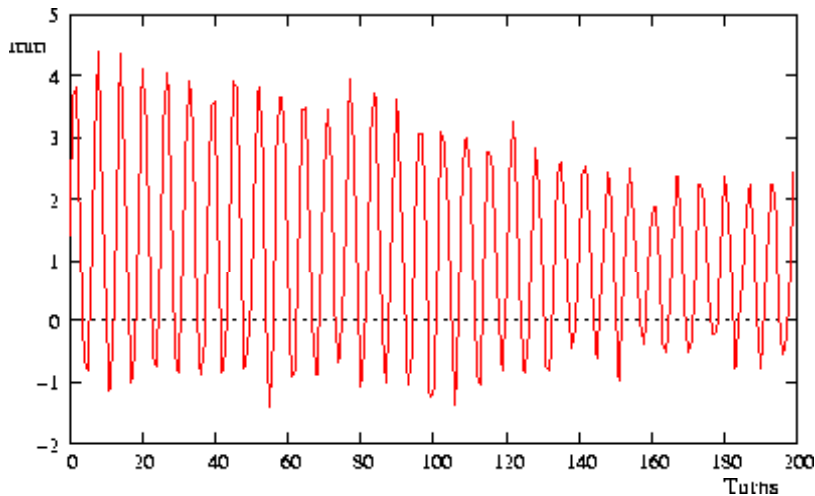

Fourier transform of pick-up signal



# Periodic extension of the signal and Windowing

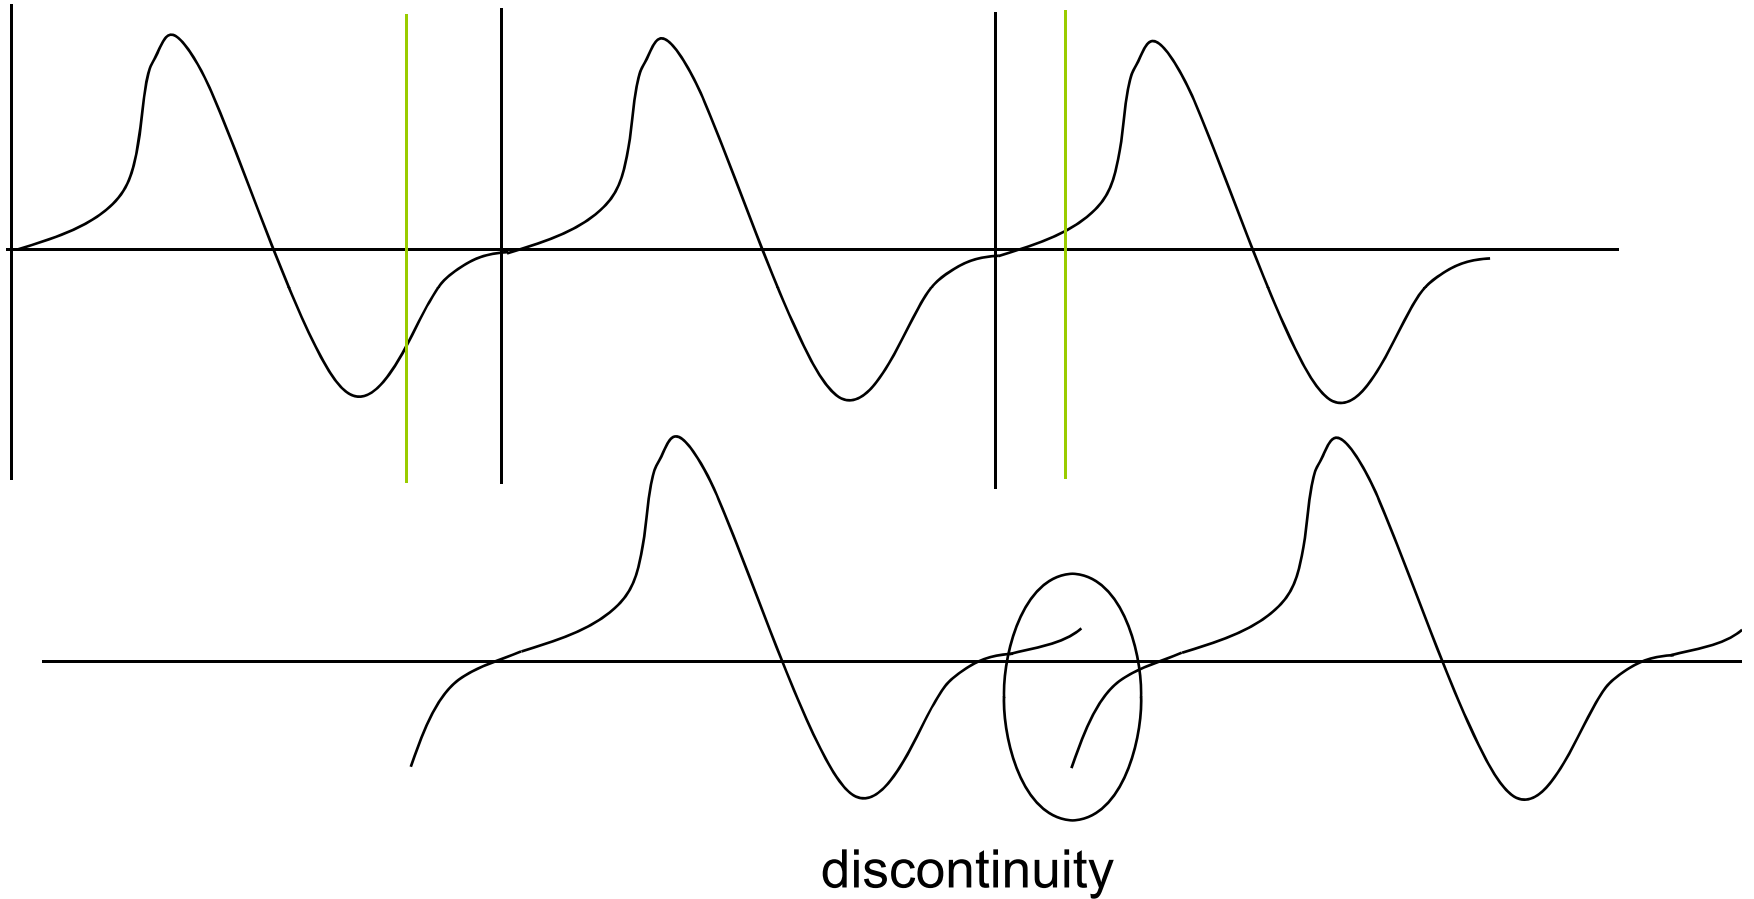






# Windowing

The Discrete Fourier assumes one cycle of a repetitive signal.

Blackman-Harris Window is used

Each sample is multiplied with a coefficient


Coefficients are pre-calculated and stored in a table

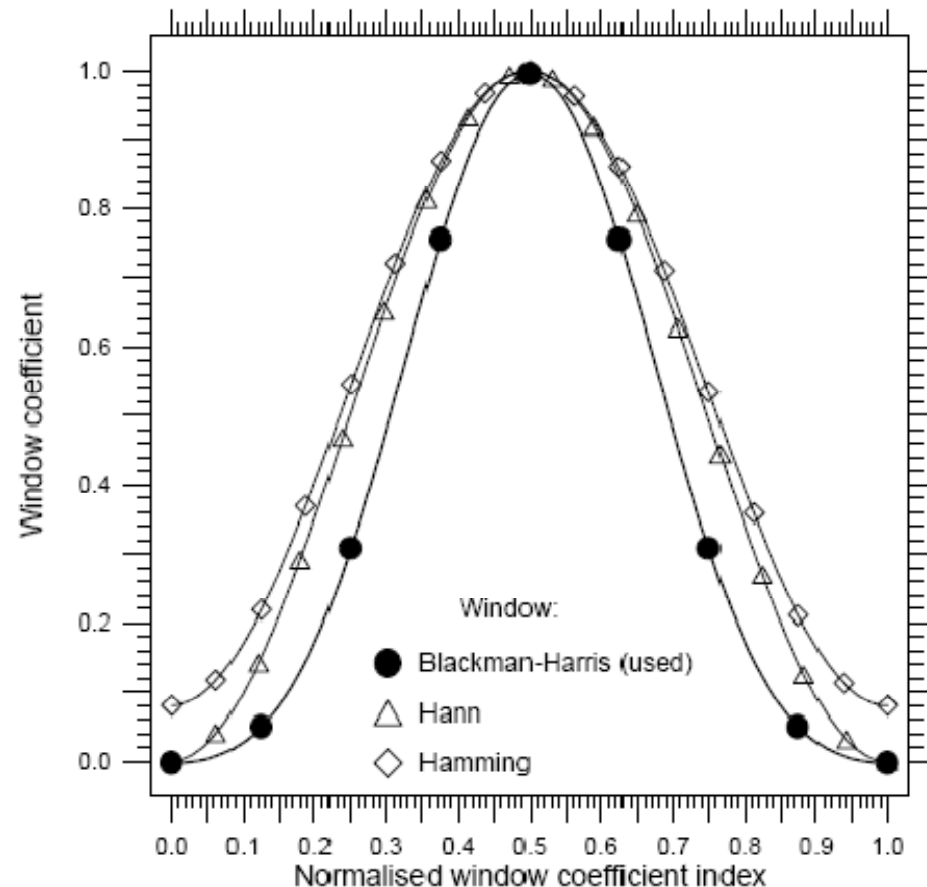



## Peak search algorithm

- Power value is bigger than its predecessor
- Power value is bigger than its successor
- Power value is biggest in the whole spectrum
- The power value is at least 3 times bigger than the arithmetic mean of all power bins.

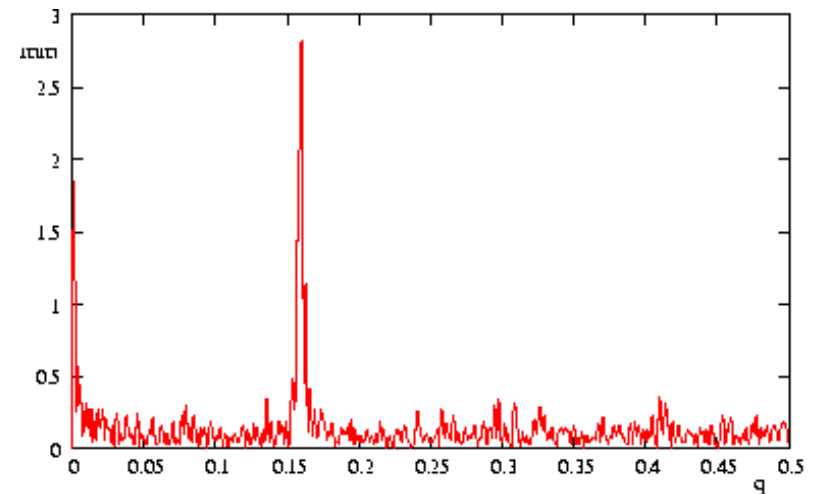



# Q interpolation

Betatron signal is not a pure Harmonic but includes rev. freq Harmonics, noise ...


The windowing process is not Perfect

Coherent betatron signal is Damped in the time domain

$$V(n_\beta - 1) = a(n_\beta - 1)^2 + b(n_\beta - 1) + c$$


$$V(n_\beta) = an_\beta^2 + bn_\beta + c$$

$$V(n_\beta + 1) = a(n_\beta + 1)^2 + b(n_\beta + 1) + c$$

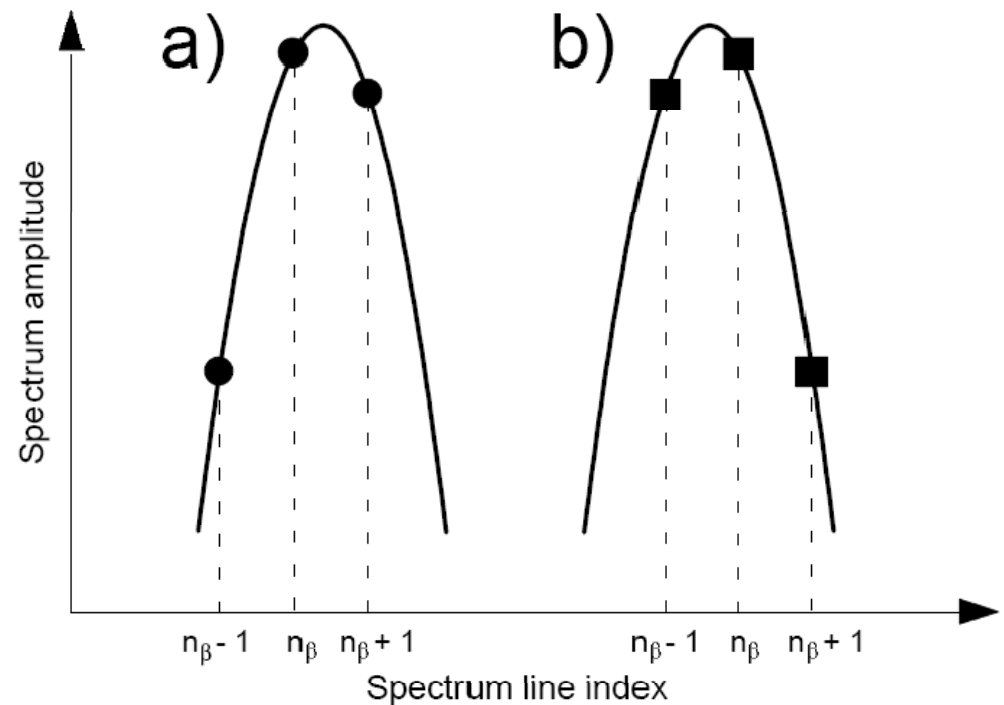




# Q-Measurement Results

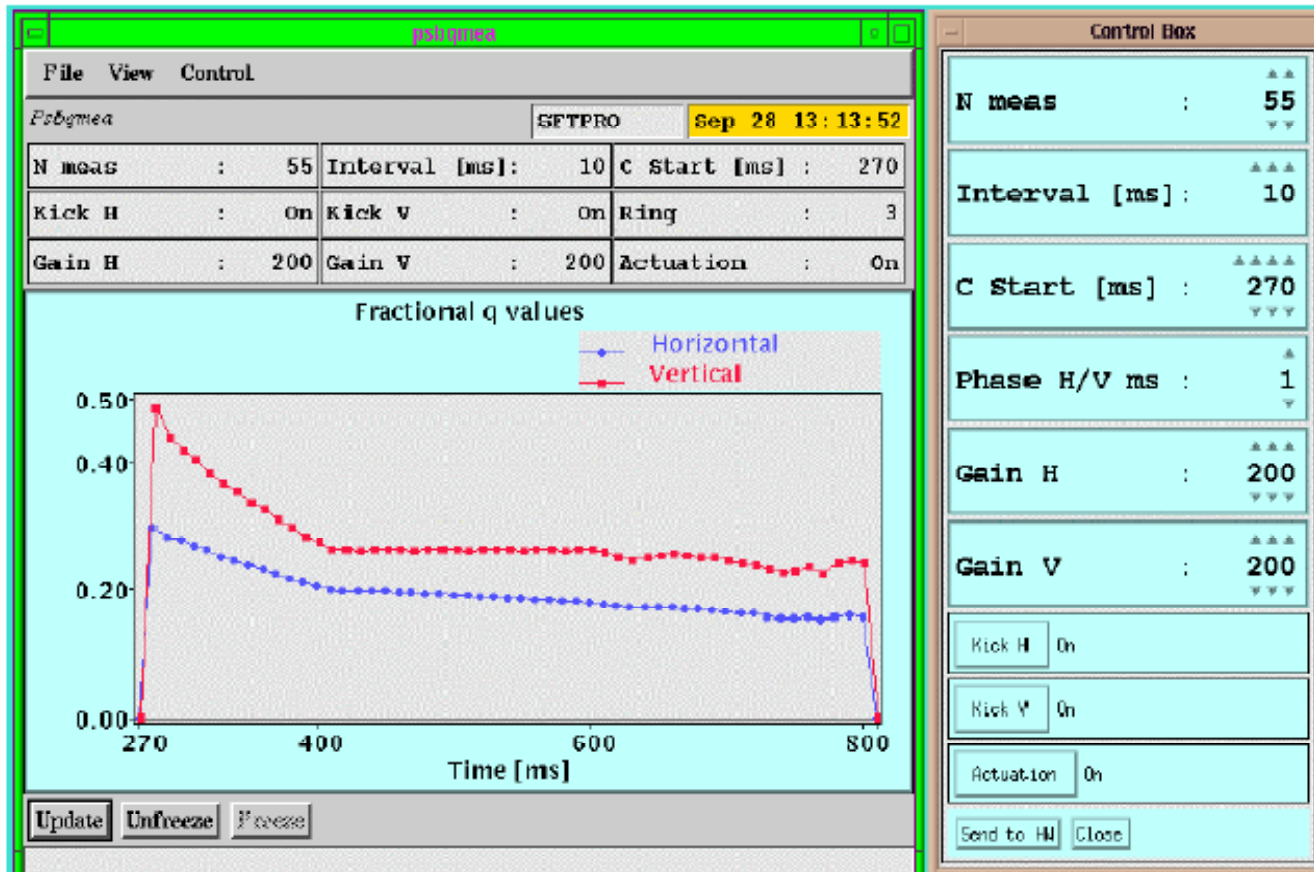



## Direct Diode Detection Base Band Q measurement

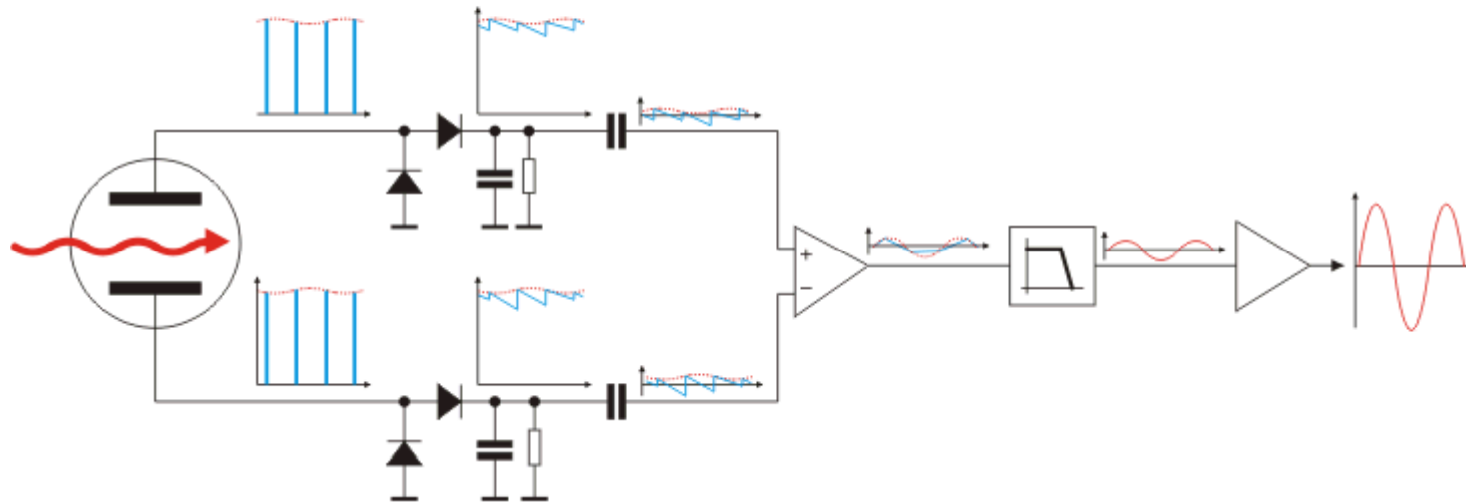

Diode Detectors convert spikes to saw-tooth waveform

Signal is connected to differential amplifier to cut out DC level


Filter eliminates most of the revolution frequency content

Output amplifier brings the signal level to amplitudes suitable for long distance transmission




# BBQ Results from CERN SPS

Results from Sampling

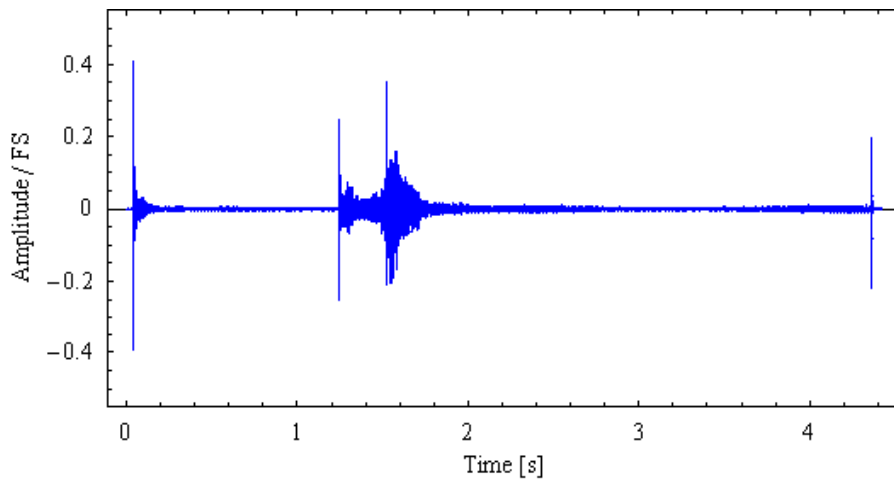


After Fourier Transform

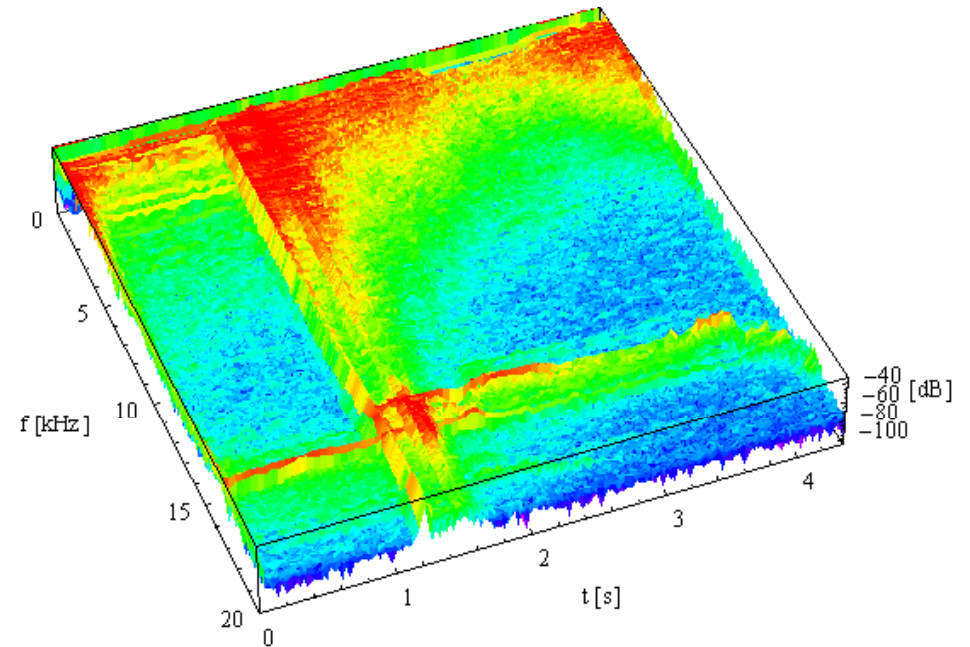



# Emittance measurements

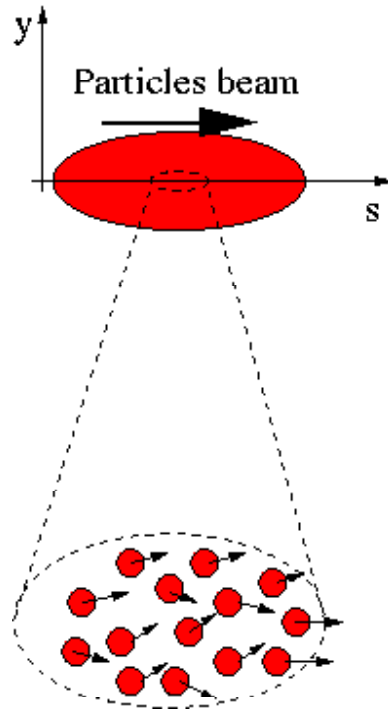


A beam is made of many many particles, each one of these particles is moving with a given velocity. Most of the velocity vector of a single particle is parallel to the direction of the beam as a whole ( $s$ ). There is however a smaller component of the particles velocity which is perpendicular to it ( $x$  or  $y$ ).

$$\vec{v}_{particle} = v_s \hat{u}_s + v_x \hat{u}_x + v_y \hat{u}_y$$



## Emittance measurements

- If for each beam particle we plot its position and its transverse angle we get a particle distribution whose boundary is an usually ellipse.
- The projection onto the  $x$  axis is the beam size

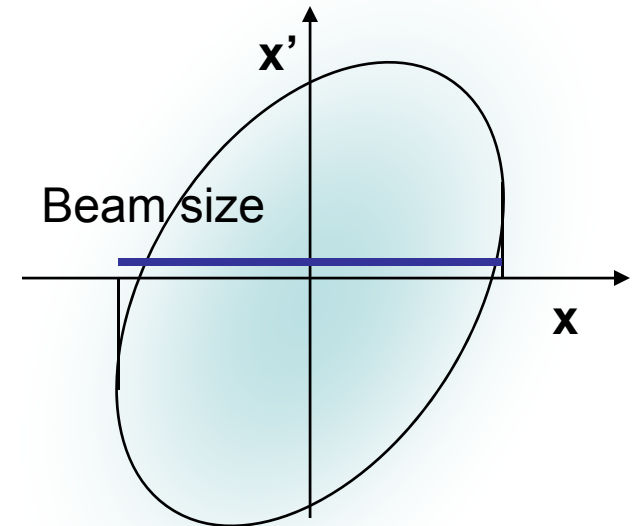






## The slit method


- If we place a slit into the beam we cut out a small vertical slice of phase space
- Converting the angles into position through a drift space allows to reconstruct the angular distribution at the position defined by the slit

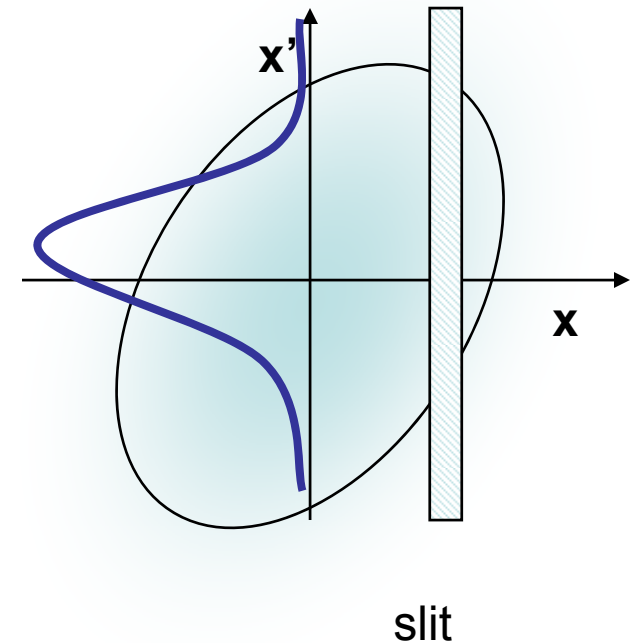




## Transforming angular distribution to profile

- When moving through a **drift space** the angles don't change (**horizontal move** in phase space)
- When moving through a **quadrupole** the position does not change but the angle does (**vertical move** in phase space)

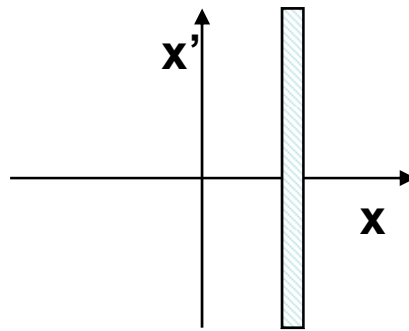


slit

Influence of a drift space

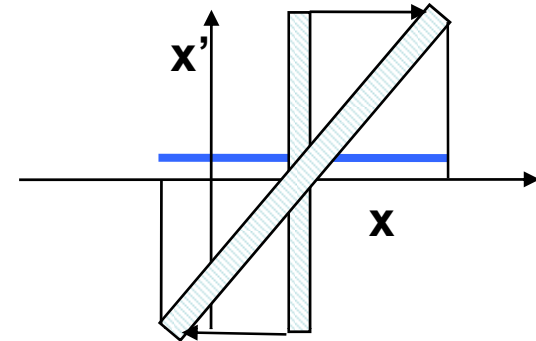

slit

Influence of a quadrupole


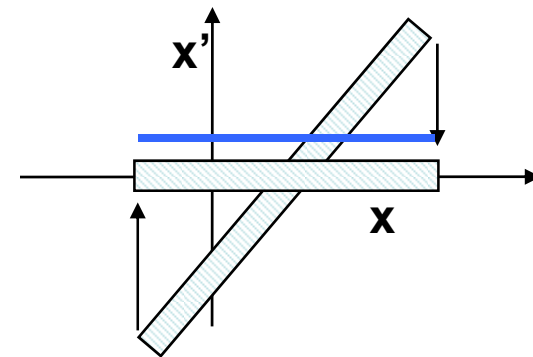


slit



# The Slit Method

3-dim plot:

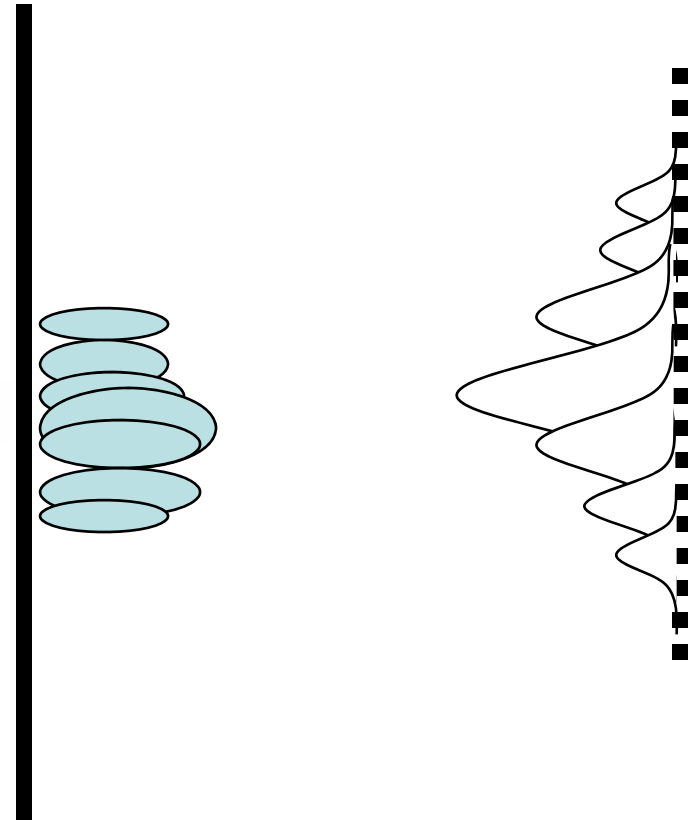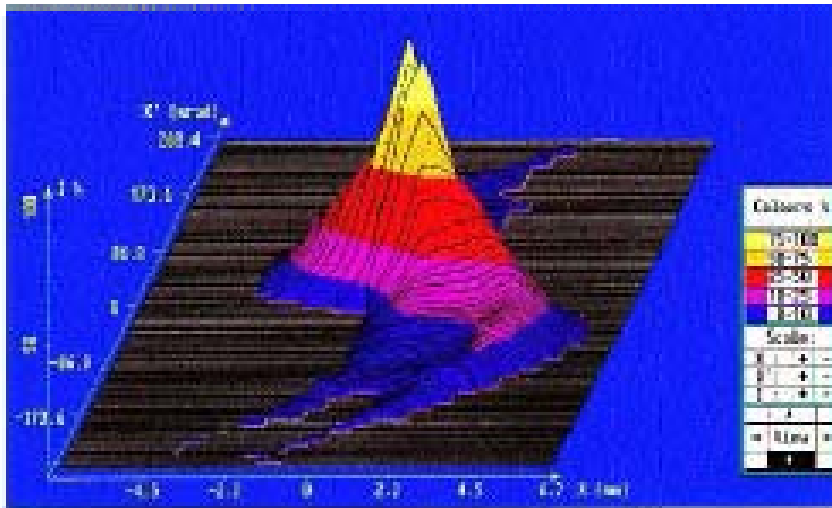

U. Raich CAS Frascati 2008  
Beam Diagnostics  
3d plot from P. Forck

**CAS**

THE CERN ACCELERATOR SCHOOL







## Moving slit emittance measurement

- Position resolution given by slit size and displacement
- Angle resolution depends on resolution of profile measurement device and drift distance
- High position resolution → many slit positions → slow
- Shot to shot differences result in measurement errors



# Single pulse emittance measurement

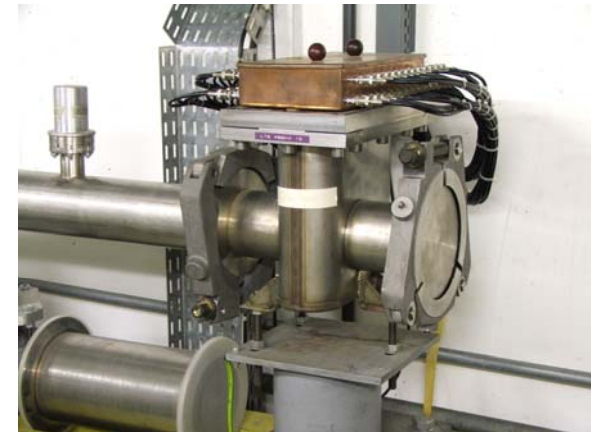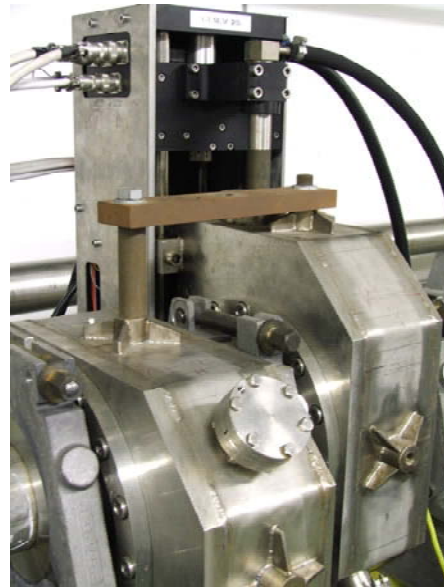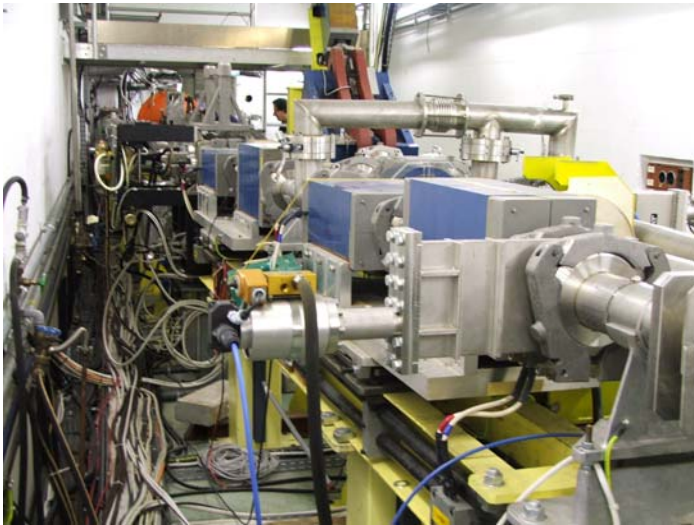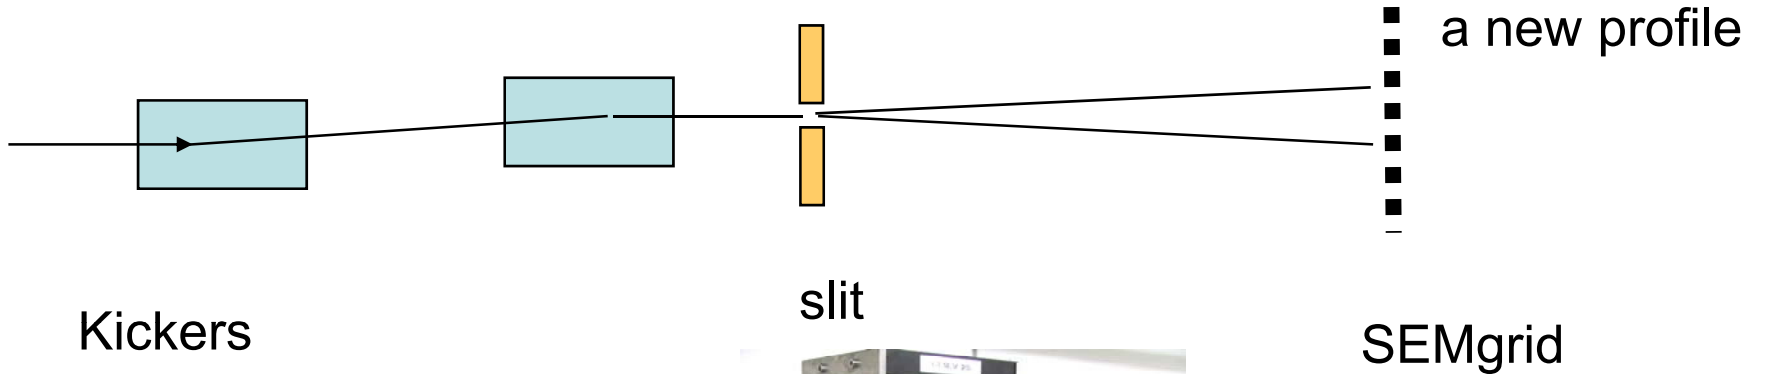


U. Raich CAS Frascati 2008  
Beam Diagnostics

**CAS**

THE CERN ACCELERATOR SCHOOL



# Result of single pulse emittance measurement

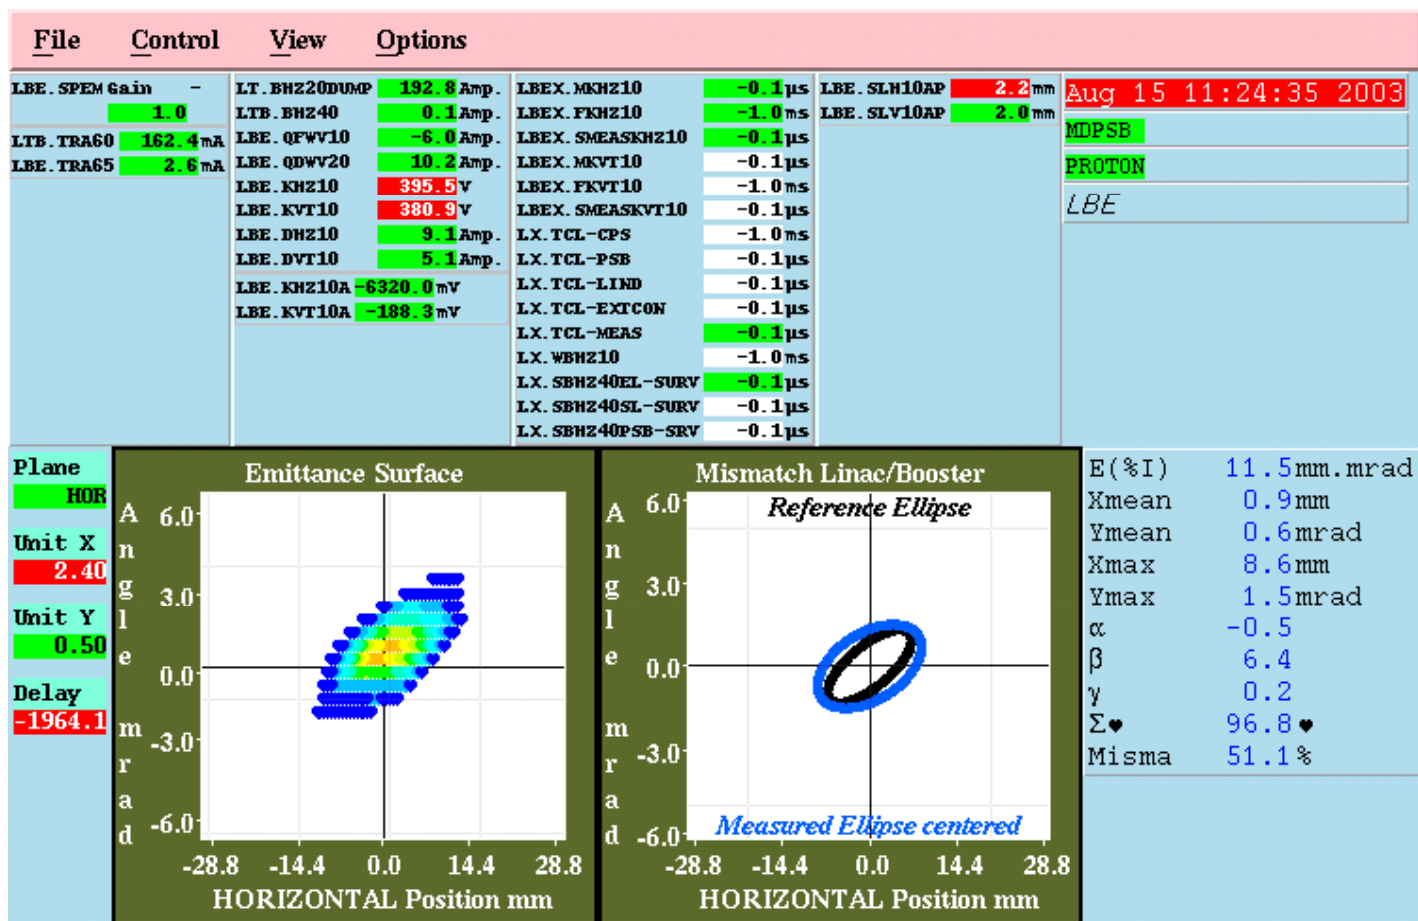

FREEZE CANCEL BEAM

Waiting for new acquisition...




## Single Shot Emittance Measurement

- Advantage:
  - Full scan takes 20  $\mu$ s
  - Shot by shot comparison possible
- Disadvantage:
  - Very costly
  - Needs dedicated measurement line
  - Needs a fast sampling ADC + memory for each wire
- Cheaper alternative:
  - Multi-slit measurement



## Multi-slit measurement

- Needs high resolution profile detector
- Must make sure that profiles don't overlap

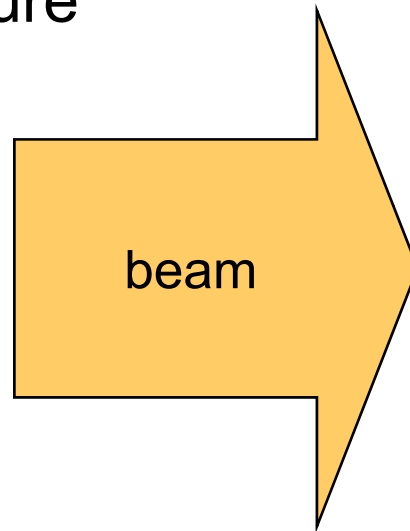

Scintillator + TV + frame grabber often used as profile detector

Very old idea, was used with photographic plates






# Pepperpot

Uses small holes instead of slits

Measures horizontal and vertical emittance in a single shot

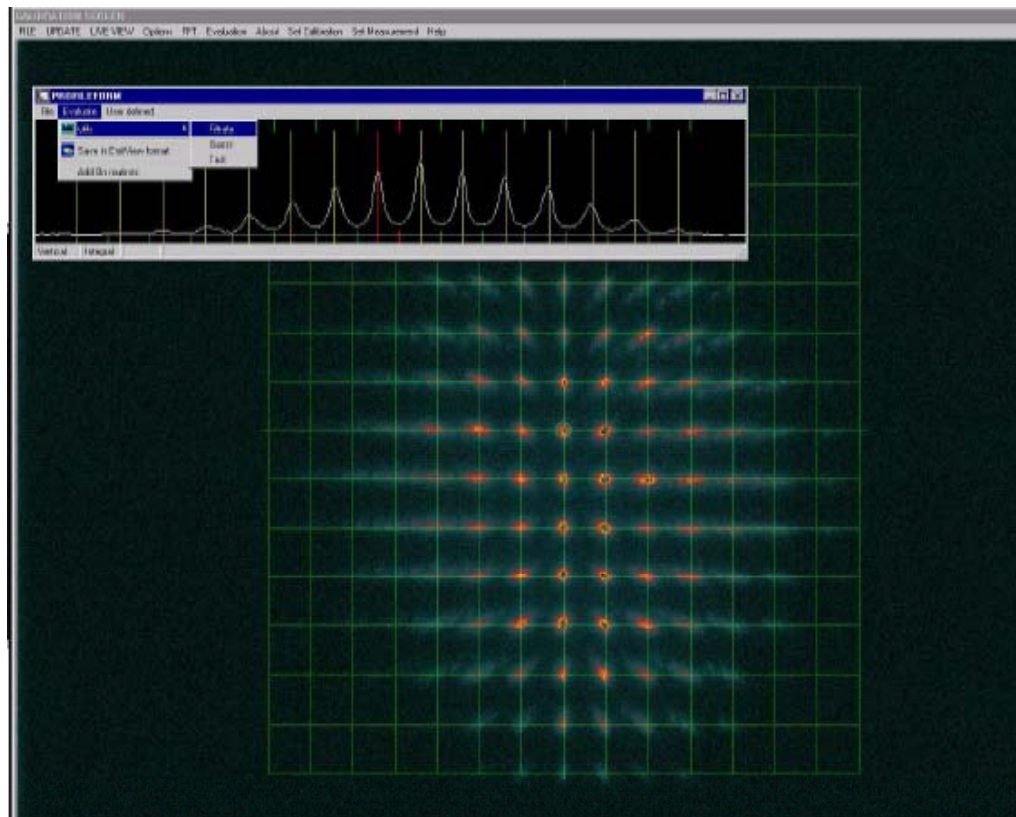

U. Raich CAS Frascati 2008  
Beam Diagnostics

Photo P. Forck


**CAS**

THE CERN ACCELERATOR SCHOOL



# Adiabatic damping

- Change of emittance with acceleration

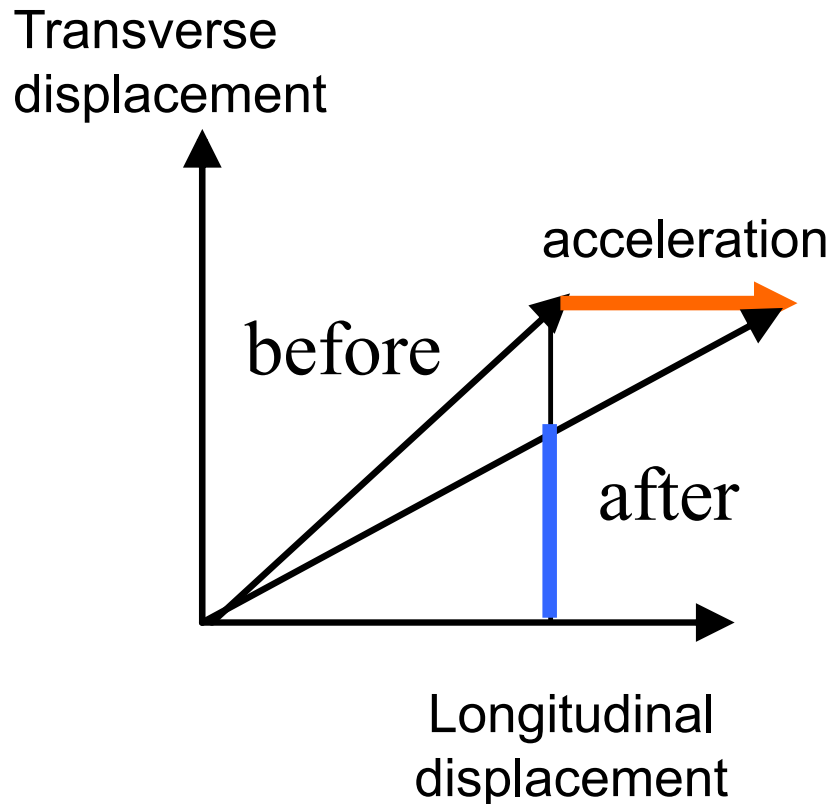


$$\mathcal{E}_{norm} = \mathcal{E}_{physical} \beta \gamma$$

$\beta$ : speed  
 $\gamma$ : Lorentz factor



$$\gamma = \frac{1}{\sqrt{1 - \beta^2}}$$



# Longitudinal Emittance

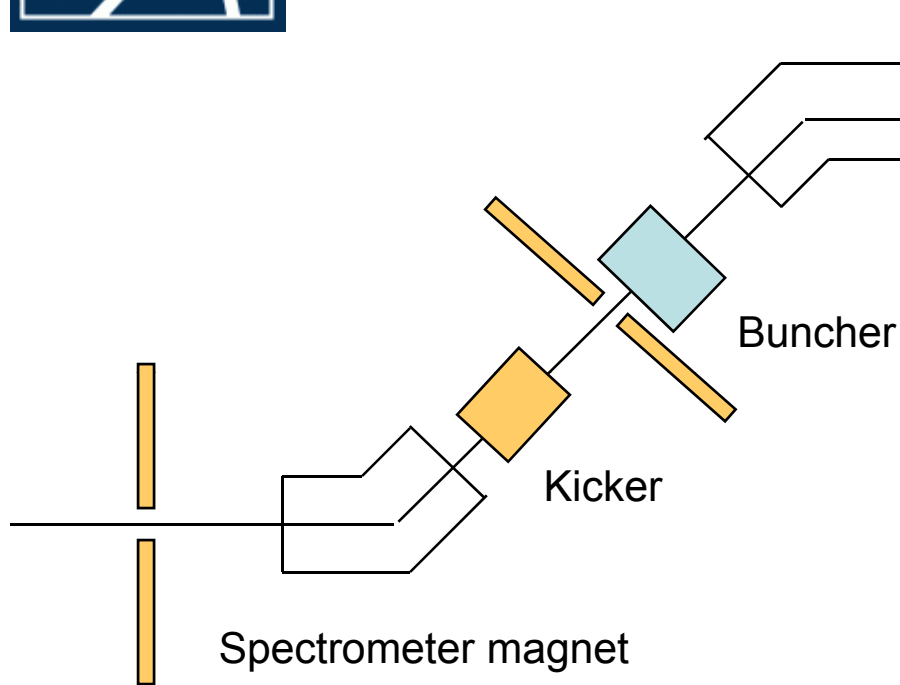

- First spectrometer magnet spreads out particles of different energy
- Slit1 selects a slice of energies
- Buncher rotates this slice by 90° in phase space (transforms phase to energy)
- Second spectrometer spreads out energies
- SemGrid measures phase profile

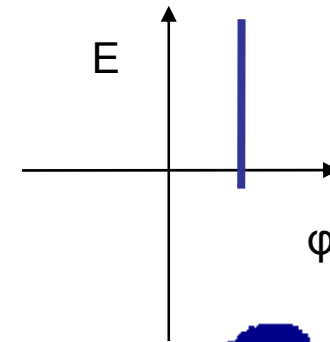



# Computed Tomography (CT)


Principle of Tomography:

- Take many 2-dimensional Images at different angles
- Reconstruct a 3-dimensional picture using mathematical techniques (Algebraic Reconstruction Technique, ART)







# The reconstruction

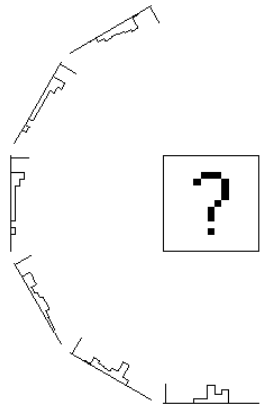

Produce many projections of the object to be reconstructed

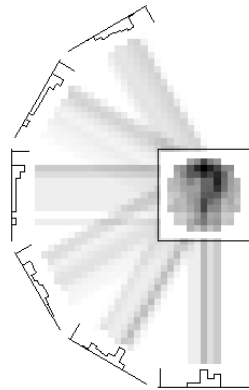

Back project and overlay the "projection rays"

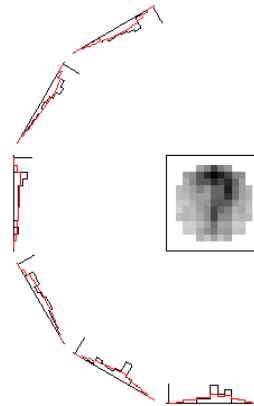



Project the back-projected object and calculate the difference



Iteratively back-project the differences to reconstruct the original object



## Some CT results

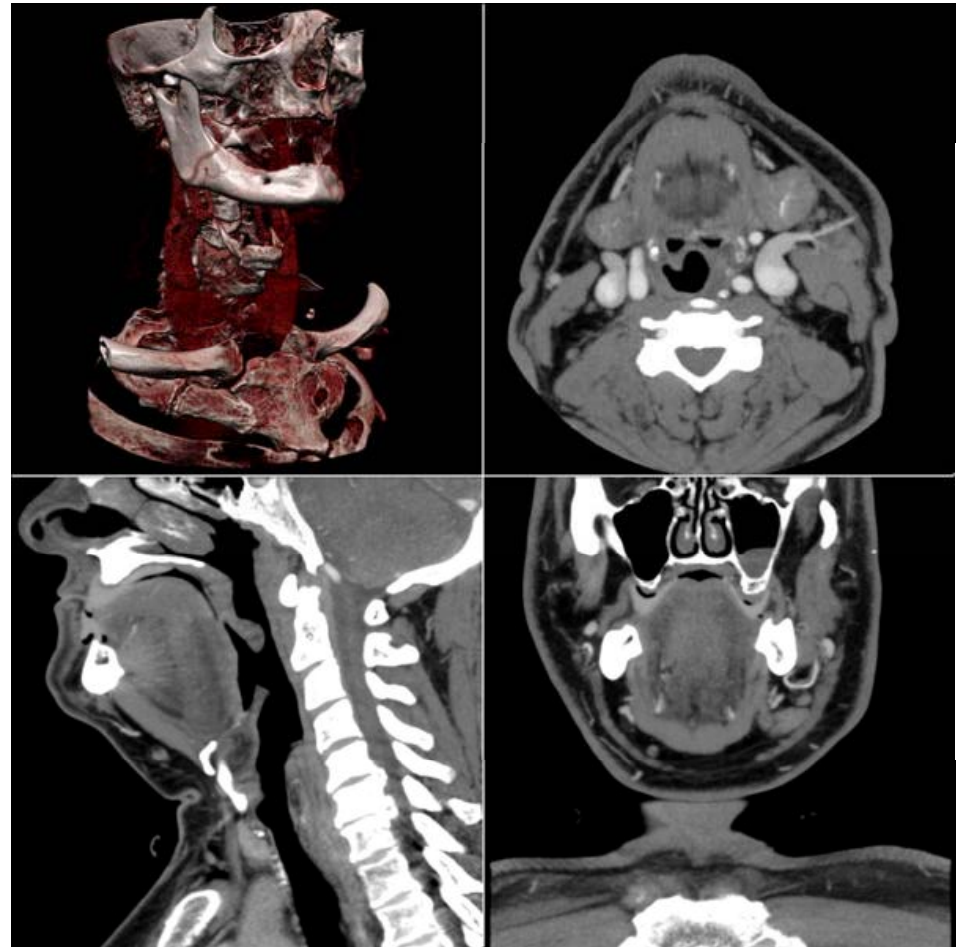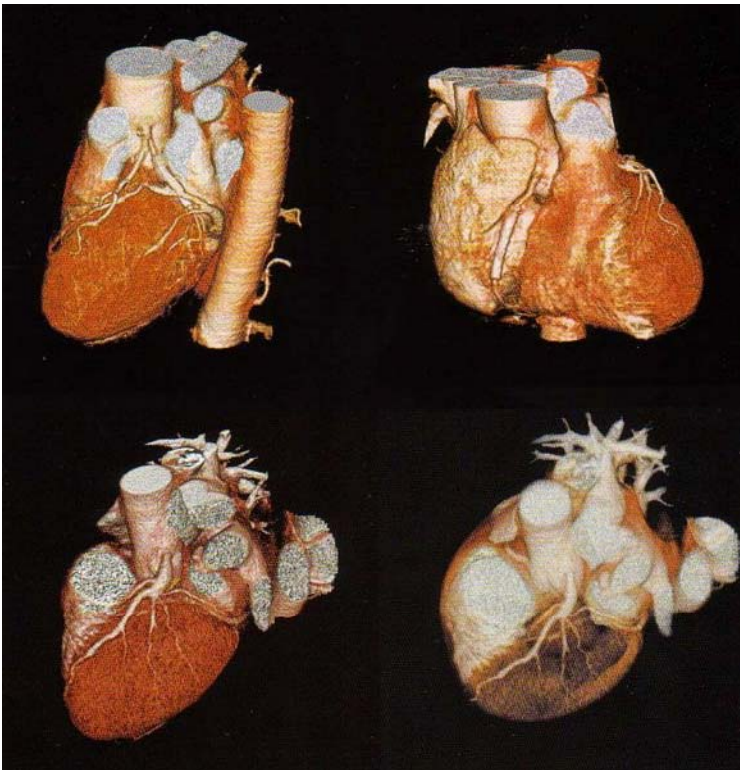

U. Raich CAS Frascati 2008  
Beam Diagnostics

**CAS**


THE CERN ACCELERATOR SCHOOL






# Computed Tomography and Accelerators


RF voltage

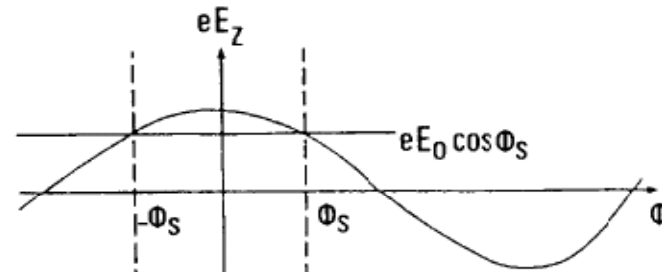

Restoring force for non-synchronous particle

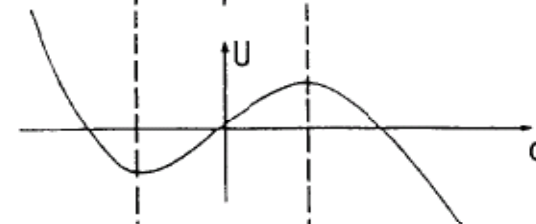

Longitudinal phase space

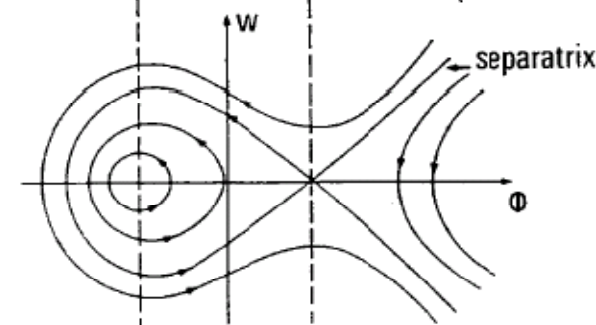

Projection onto  $\Phi$  axis corresponds to bunch profile


U. Raich CAS Frascati 2008  
Beam Diagnostics

**CAS**

THE CERN ACCELERATOR SCHOOL



# Reconstructed Longitudinal Phase Space

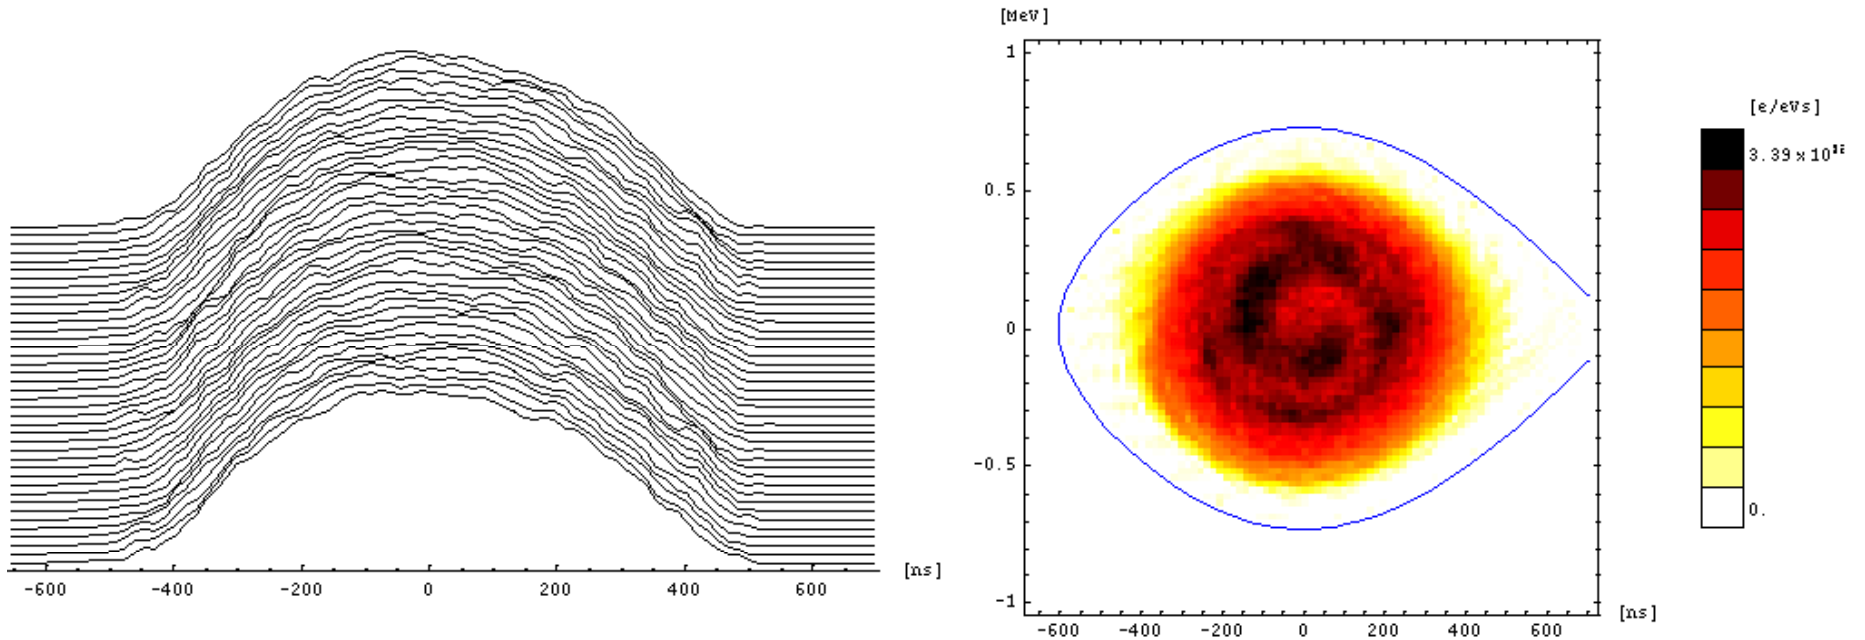

U. Raich CAS Frascati 2008  
Beam Diagnostics



**CAS**

THE CERN ACCELERATOR SCHOOL





# Bunch Splitting

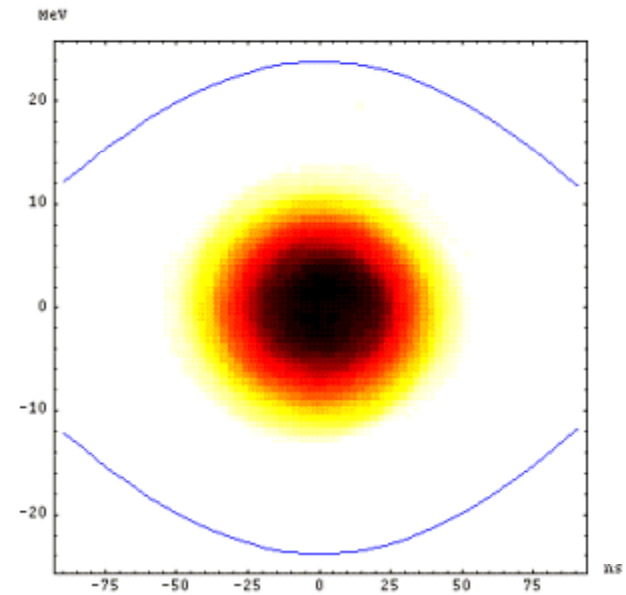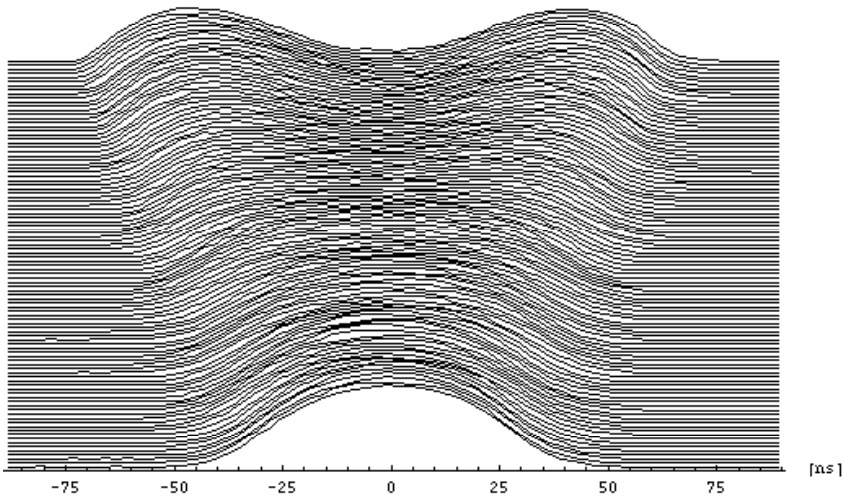

U. Raich CAS Frascati 2008  
Beam Diagnostics

**CAS**

THE CERN ACCELERATOR SCHOOL